


SINGLE

Technical Data Book

DVM S for Europe (R410A, 50Hz, Deluxe)

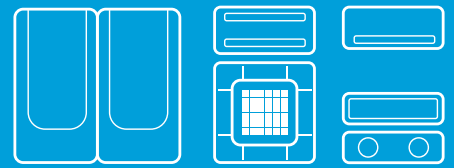

Model : AC ***HB*DKH/EU (ODU: AC***HCAD*H/EU)

History

Version	Modification	Date	Remark
Ver.1.0	Released SINGLE Duct S (Deluxe) TDB	14.06.10	
Ver.1.1	Modification for erros : the number of fan motors in Specification	15.04.07	
Ver.1.2	Add Note information in Specification regarding EU F-Gas regulation	15.06.17	
Ver.1.3	Add DPM information	15.08.03	
Ver.1.4	Modification for sound pressure data (ODU: 2.6, 3.5kW)	15.08.24	
Ver.1.5	Modification for errors : the static pressure (6.0kW)	15.11.11	
Ver.1.6	Modified the option code for 5.2kW	16.3.08	

Index

0 DPM installation

1 Nomenclature

2 Specifications (Indoor)

3 Capacity table

4 Dimensional drawing (Indoor)

5 Electrical wiring diagram (Indoor)

6 Sound pressure level (Indoor)

7 Sound power level (Indoor)

**8 Recommended operation range
(Indoor)**

**9 Electrical wiring diagram
(Outdoor)**

10 Sound pressure level (Outdoor)

11 Sound power level (Outdoor)

12 Cycle diagram (Outdoor)

13 Dimensional drawing (Outdoor)

14 Capacity correction (Outdoor)

0 DPM (Digital Pack Multi)

Installing DPM

DPM Allowable Combination

Product	Outdoor unit	2 IDUs connection	3 IDUs connection	4 IDUs connection
		Indoor unit	Indoor unit	Indoor unit
Duct S (Delux)	AC071HCADKH	AC035HBMDKH×2	-	-
	AC100HCAD*H	AC052HBMDKH×2	AC035HBMDKH×3	-
	AC120HCAD*H	AC060HBMDKH×2	AC035HBMDKH×3	-
	AC140HCAD*H	AC071HBMDKH×2	AC052HBMDKH×3	AC035HBMDKH×4
4Way Cst / 4Way Cst (600x600)	AC071FCA*EH	AC035FBNDEH×2	-	-
	AC100FCAD*H	AC052FBNDEH×2	AC035FBNDEH×3	-
		AC052FB4DEH×2		
	AC100FCAP*H	AC052FBNDEH×2	AC035FBNDEH×3	-
		AC052FB4DEH×2		
	RC125DHX*A	AC060FBNDEH×2	AC052FBNDEH×3	-
			AC052FB4DEH×3	
	RC125PHX*A	AC060FBNDEH×2	AC052FBNDEH×3	-
			AC052FB4DEH×3	
	RC140DHX**	AC071FBNDEH×2	AC052FBNDEH×3	AC035FBNDEH×4
		AC071FB4DEH×2		
	RC140PHX*A	AC071FBNDEH×2	AC052FBNDEH×3	AC035FBNDEH×4
AC071FB4DEH×2				

DPM KIT

DPM KIT	2 IDUs connection	3 IDUs connection	4 IDUs connection
		MXJ-2D2509K	MXJ-3D2509K

Installation Conditions

Items	Maximum allowable length
Max. pipe length after DPM kit	15m
Max. pipe length difference between IDUs after DPM kit	5m
Max. distance between IDUs	10m
Max. height difference between IDUs	0.5m
* Indoor units should be installed in one area which is not divided by a wall	

1 Nomenclature

Indoor Units

Model Names

AC	026	H	B	M	D	E	H	/	EU
(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)		Buyer

(1) Classification

AC	CAC
----	-----

(2) Capacity

x 1/10 kW (3 digits)

(3) Version

E	2012
F	2013
H	2014

(4) Product Type

B	Indoor Unit
C	Outdoor Unit

(5) Product Notation

1	1Way Cassette
N	4Way Cassette S (600 X 600)
4	4Way Cassette S
L	LSP Duct
M	MSP Duct
C	Ceiling
J	Console
A	Wall-Mounted

(6) Feature

F	Flagship
S	Standard
D	Deluxe
P	Premium

(7) Rating Voltage

E	1Ø, 220~240V, 50Hz
G	3Ø, 380~415V, 50Hz
K	1Ø, 220~240V, 50/60Hz

(8) Mode

H	Heat Pump(R410A)
C	Cooling Only(R410A)
E	Heat Pump(R22)
D	Cooling Only(R22)

1 Nomenclature

Outdoor Units

Model Names

AC	026	H	C	B	D	E	H	/	EU
(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)		Buyer

(1) Classification

AC	CAC
----	-----

(2) Capacity

x 1/10 kW (3 digits)

(3) Version

E	2012
F	2013
H	2014

(4) Product Type

B	Indoor Unit
C	Outdoor Unit

(5) Feature 1

A	Inv+Side+General Temp
B	Non Inv+Side+General Temp

(6) Feature2

F	Standrad+Tropical+Non Module
S	Standard
D	Deluxe
P	Premium

(7) Rating Voltage

E	1Ø, 220~240V, 50Hz
G	3Ø, 380~415V, 50Hz
K	1Ø, 220~240V, 50/60Hz
N	3Ø, 380~415V, 50/60Hz

(8) Mode

H	Heat Pump(R410A)
C	Cooling Only(R410A)
E	Heat Pump(R22)
D	Cooling Only(R22)

2 Specifications

Duct S

Type				Duct S	Duct S			
Model Name	Indoor Unit			AC026HBLDKH/EU	AC035HBLDKH/EU			
	Outdoor Unit			AC026HCADKH/EU	AC035HCADKH/EU			
System	Mode			Heat Pump	Heat Pump			
	Capacity	Cooling(Min/Std/Max)		kW	0.95 / 2.60 / 3.50	0.98 / 3.50 / 4.10		
				Btu/h	3,200 / 8,900 / 11,900	3,300 / 11,900 / 14,000		
		Heating(Min/Std/Max)		kW	0.95 / 3.30 / 4.30	0.99 / 4.00 / 5.00		
				Btu/h	3,200 / 11,300 / 14,700	3,400 / 13,600 / 17,100		
	Power	Power Input (Nominal)	Cooling(Min/Std/Max)		kW	0.29 / 0.70 / 1.17	0.33 / 1.15 / 1.35	
			Heating(Min/Std/Max)			0.20 / 0.87 / 1.30	0.24 / 1.18 / 1.50	
		Current Input (Nominal)	Cooling(Min/Std/Max)		A	1.80 / 3.40 / 5.40	2.10 / 5.30 / 6.20	
			Heating(Min/Std/Max)			1.30 / 4.10 / 6.80	1.60 / 5.40 / 6.80	
		MCA				A	10.00 (MCA)	10.00 (MCA)
		MFA				A	11.00	11.00
	Energy Efficiency	EER (Nominal Cooling)		-	3.71	3.04		
		COP (Nominal Heating)		-	3.79	3.39		
		Energy Grade		-	SE ER 6.3 (A++)	SEER 6.1 (A++)		
	Piping Connections	Liquid Pipe		Ø, mm	6.35	6.35		
				Ø, inch	1/4"	1/4"		
		Gas Pipe		Ø, mm	9.52	9.52		
				Ø, inch	3/8"	3/8"		
		Installation Limitation	Max. Length		m	20 (25)	20 (25)	
			Max. Height		m	15 (15)	15 (15)	
Field Wiring	Power Source Wire		Ø, mm	2.50	2.50			
	Transmission Cable		Ø, mm	0.75 ~ 1.25	0.75 ~ 1.25			
Refrigerant	Type		-	R410A	R410A			
	Control Method		-	-	-			
	Factory Charging		kg	0.90	0.90			
Indoor Unit	Power Supply			Ø, #, V, Hz	1,2,220-240,50	1,2,220-240,50		
	Fan	Type		-	Sirocco Fan(BLDC)	Sirocco Fan(BLDC)		
		Motor	Output		W	153 x 1	153 x 11	
			Air Flow Rate		High/Mid/Low	CMM	8.00 / 6.50 / 4.90	9.20 / 7.40 / 5.80
		External Static Pressure		Min/Std/Max	l/s	133.33 / 108.33 / 81.67	153.33 / 123.33 / 96.67	
		Drain	Drain Pipe		Ø,mm	VP20 (OD 26,ID 20)	VP20 (OD 26,ID 20)	
	Sound		Pressure		High/Mid/Low	40.0 / 37.0 / 34.0	40.0 / 37.0 / 34.0	
		Power		Cooling	dB(A)	53.0	53.0	
	External Dimension	Net Weight		kg	20.00	20.00		
		Shipping Weight		kg	24.00	24.00		
		Net Dimensions (WxHxD)		mm	700 x 199 x 600	700 x 199 x 600		
		Shipping Dimensions (WxHxD)		mm	950 x 280 x 710	950 x 280 x 710		
	Panel Size	Panel model		-	-	-		
		Panel Net Weight		kg	-	-		
		Shipping Weight		kg	-	-		
		Net Dimensions (WxHxD)		mm	-	-		
	Additional Accessories	Shipping Dimensions (WxHxD)		mm	-	-		
		Drain pump	Max. Lifting		mm/liter/h	-	-	
			Air Filter		-	-	-	
		Power Supply			Ø, #, V, Hz	1,2,220-240,50	3,4,380-415,50	
Compressor	Type		-	Single BLDC Rotary	Single BLDC Rotary			
	Model		-	UG9A090FUAER	UG9A090FUAER			
	Output		kW	0.84	0.84			
Fan	Oil	Type		-	POE	POE		
		Air Flow Rate		Cooling	CMM	37.00	32.00	
Sound	Pressure		Cooling/Heating	dB(A)	46.0 / 47.0	47.0 / 47.0		
	Power		Cooling	dB(A)	63.0	63.0		
External Dimension	Net Weight		kg	29.50	29.50			
	Shipping Weight		kg	32.00	32.00			
	Net Dimensions (WxHxD)		mm	720 x 548 x 265	720 x 548 x 265			
	Shipping Dimensions (WxHxD)		mm	844 x 622 x 353	844 x 622 x 353			
Operating Temp. Range	Cooling		°C	-15.0 ~ 52.0	-15.0 ~ 52.0			
	Heating		°C	-20.0 ~ 24.0	-20.0 ~ 24.0			

- All figures comply with EN14511

- Nominal cooling capacities are based on;

Indoor temperature : 27°C DB, 19°C WB / Outdoor temperature : 35°C DB, Refrigerant piping : 5m , Level differences : 0m

- Nominal heating capacities are based on;

Indoor temperature : 20°C DB, 15°C WB / Outdoor temperature : 7°C DB, 6°C WB, Refrigerant piping : 5m, Level differences : 0m

- Sound level was acquired in an anechoic room. Thus actual noise level may be different depending on the installation conditions.

- Specifications may be subject to change without prior notice.

- These products contain R410A which is fluorinated greenhouse gas.

2 Specifications

Duct S

Type				Duct S	Duct S		
Model Name	Indoor Unit			AC035HBMDKH/EU	AC052HBLDKH/EU		
	Outdoor Unit			AC035HCADKH/EU	AC052HCADKH/EU		
System	Mode				Heat Pump	Heat Pump	
	Capacity	Cooling(Min/Std/Max)		kW	1.10 / 3.50 / 4.00	1.20 / 5.00 / 6.00	
				Btu/h	3,800 / 11,900 / 13,600	4,100 / 17,100 / 20,500	
		Heating(Min/Std/Max)		kW	1.10 / 4.00 / 4.60	1.10 / 6.00 / 7.20	
				Btu/h	3,800 / 13,600 / 15,700	3,800 / 20,500 / 24,600	
	Power	Power Input (Nominal)	Cooling(Min/Std/Max)	kW	0.30 / 1.10 / 1.50	0.35 / 1.56 / 2.20	
			Heating(Min/Std/Max)		0.25 / 1.02 / 1.50	0.26 / 1.66 / 2.70	
		Current Input (Nominal)	Cooling(Min/Std/Max)	A	2.10 / 5.10 / 6.80	2.10 / 7.20 / 10.00	
			Heating(Min/Std/Max)		1.60 / 4.70 / 6.80	1.70 / 7.50 / 12.00	
		MCA		A	18.70 (MCA)	22.00 (MCA)	
		MFA		A	20.60	25.00	
	Energy Efficiency	EER (Nominal Cooling)		-	3.18	3.21	
		COP (Nominal Heating)		-	3.92	3.61	
		Energy Grade		-	SEER 5.4 (A)	SEER 6.1 (A++)	
				-	SCOP 3.8 (A)	SCOP 3.8 (A)	
	Piping Connections	Liquid Pipe		Ø, mm	6.35	6.35	
				Ø, inch	1/4"	1/4"	
		Gas Pipe		Ø, mm	9.52	12.70	
				Ø, inch	3/8"	1/2"	
		Installation Limitation	Max. Length	m	20 (25)	30 (35)	
Max. Height			m	15 (15)	20 (20)		
Field Wiring	Power Source Wire		Ø, mm	2.50	2.50		
	Transmission Cable		Ø, mm	0.75 ~ 1.25	0.75 ~ 1.25		
Refrigerant	Type		-	R410A	R410A		
	Control Method		-	-	-		
	Factory Charging		kg	0.90	1.30		
Indoor Unit	Power Supply			Ø, #, V, Hz	1,2,220-240,50	1,2,220-240,50	
	Fan	Type		-	Sirocco Fan(BLDC)	Sirocco Fan(BLDC)	
		Motor	Output		W	153 x 11	153 x 11
			Air Flow Rate		High/Mid/Low	CMM	12.00 / 9.50 / 8.00
					l/s	200.00 / 158.33 / 133.33	250.00 / 200.00 / 150.00
		External Static Pressure	Min/Std/Max		mmAq	0.00 / 2.50 / 15.00	0.00 / 3.00 / 4.00
	Pa				0.00 / 24.50 / 147.00	0.00 / 29.40 / 39.20	
	Drain	Drain Pipe		Ø,mm	VP20 (OD 26,ID 20)	VP20 (OD 26,ID 20)	
		Sound	Pressure High/Mid/Low		dB(A)	32.0 / 29.0 / 26.0	33.0 / 30.0 / 27.0
			Power Cooling		52.0	55.0	
	External Dimension	Net Weight		kg	24.50	22.50	
		Shipping Weight		kg	28.50	26.00	
		Net Dimensions (WxHxD)		mm	850 x 250 x 700	1,100 x 200 x 450	
		Shipping Dimensions (WxHxD)		mm	1,100 x 320 x 780	1,350 x 270 x 530	
	Panel Size	Panel model		-	-	-	
		Panel Net Weight		kg	-	-	
		Shipping Weight		kg	-	-	
		Net Dimensions (WxHxD)		mm	-	-	
			Shipping Dimensions (WxHxD)	mm	-	-	
	Additional Accessories	Drain pump	Drain pump	-	MDP-G075SP	MDP-E075SP	
Max. Lifting			mm/liter/h	-	-		
Air Filter		-	-	-			
Outdoor Unit	Power Supply			Ø, #, V, Hz	1,2,220-240,50	1,2,220-240,50	
	Compressor	Type		-	Single BLDC Rotary	Twin BLDC Rotary	
		Model		-	UG9A090FUAER	UG4T150LNBEQ	
		Output		kW	0.84	1.42	
	Oil	Type		-	POE	POE	
		Fan	Air Flow Rate	Cooling	CMM	37.00	44.00
				l/s	616.67	733.33	
	Sound	Pressure	Cooling/Heating		dB(A)	47.0 / 47.0	48.0 / 48.0
			Power Cooling			63.0	63.0
	External Dimension	Net Weight		kg	29.50	45.00	
		Shipping Weight		kg	32.00	48.00	
		Net Dimensions (WxHxD)		mm	720 x 548 x 265	880 x 638 x 310	
		Shipping Dimensions (WxHxD)		mm	844 x 622 x 353	1,024 x 750 x 414	
	Operating Temp. Range	Cooling		°C	-15.0 ~ 50.0	-15.0 ~ 50.0	
		Heating		°C	-20.0 ~ 24.0	-20.0 ~ 24.0	

- All figures comply with EN14511

- Nominal cooling capacities are based on;

Indoor temperature : 27°C DB, 19°C WB / Outdoor temperature : 35°C DB, Refrigerant piping : 5m , Level differences : 0m

- Nominal heating capacities are based on;

Indoor temperature : 20°C DB, 15°C WB / Outdoor temperature : 7°C DB, 6°C WB, Refrigerant piping : 5m, Level differences : 0m

- Sound level was acquired in an anechoic room. Thus actual noise level may be different depending on the installation conditions.

- Specifications may be subject to change without prior notice.

- These products contain R410A which is fluorinated greenhouse gas.

2 Specifications

Duct S

Type				Duct S	Duct S		
Model Name	Indoor Unit			AC052HBMDKH/EU	AC060HBMDKH/EU		
	Outdoor Unit			AC052HCADKH/EU	AC060HCADKH/EU		
System	Mode			Heat Pump	Heat Pump		
	Capacity	Cooling(Min/Std/Max)		kW	1.20 / 5.00 / 6.00	1.80 / 6.00 / 7.50	
				Btu/h	4,100 / 17,100 / 20,500	6,100 / 20,500 / 25,600	
		Heating(Min/Std/Max)		kW	1.10 / 6.00 / 7.20	1.50 / 7.00 / 8.50	
				Btu/h	3,800 / 20,500 / 24,600	5,100 / 23,900 / 29,000	
	Power	Power Input (Nominal)	Cooling(Min/Std/Max)	kW	0.35 / 1.56 / 2.20	0.43 / 1.76 / 2.70	
			Heating(Min/Std/Max)		0.26 / 1.66 / 2.70	0.38 / 1.89 / 3.30	
		Current Input (Nominal)	Cooling(Min/Std/Max)	A	2.10 / 7.20 / 10.00	2.60 / 7.90 / 12.00	
			Heating(Min/Std/Max)		1.70 / 7.50 / 12.00	2.30 / 8.40 / 14.00	
		MCA		A	22.70 (MCA)	22.70 (MCA)	
		MFA		A	25.00	25.00	
	Energy Efficiency	EER (Nominal Cooling)		-	3.21	3.41	
		COP (Nominal Heating)		-	3.61	3.70	
		Energy Grade		-	SEER 6.1 (A++)	SEER 6.1 (A++)	
				-	SCOP 3.8 (A)	SCOP 4.0 (A+)	
	Piping Connections	Liquid Pipe		Ø, mm	6.35	6.35	
				Ø, inch	1/4"	1/4"	
		Gas Pipe		Ø, mm	12.70	15.88	
				Ø, inch	1/2"	5/8"	
		Installation Limitation	Max. Length	m	30 (35)	50 (55)	
Max. Height			m	20 (20)	30 (30)		
Field Wiring	Power Source Wire		Ø, mm	2.50	2.50		
	Transmission Cable		Ø, mm	0.75 ~ 1.25	0.75 ~ 1.25		
Refrigerant	Type		-	R410A	R410A		
	Control Method		-	-	-		
	Factory Charging		kg	1.30	1.50		
Indoor Unit	Power Supply			Ø, #, V, Hz	1,2,220-240,50	1,2,220-240,50	
	Fan	Type		-	Sirocco Fan(BLDC)	Sirocco Fan(BLDC)	
		Motor	Output		W	153 x 11	153 x 11
			Air Flow Rate		High/Mid/Low	CMM	16.00 / 13.50 / 11.00
					l/s	266.67 / 225.00 / 183.33	350.00 / 300.00 / 250.00
		External Static Pressure	Min/Std/Max		mmAq	0.00 / 3.00 / 15.00	0.00 / 3.00 / 15.00
	Pa				0.00 / 29.40 / 147.00	0.00 / 29.40 / 147.00	
	Drain	Drain Pipe		Ø,mm	VP20 (OD 26,ID 20)	VP20 (OD 26,ID 20)	
		Sound	Pressure	High/Mid/Low		33.0 / 30.0 / 27.0	37.0 / 33.0 / 29.0
			Power	Cooling		53.0	57.0
	External Dimension	Net Weight		kg	24.50	24.50	
		Shipping Weight		kg	28.50	28.50	
		Net Dimensions (WxHxD)		mm	850 x 250 x 700	850 x 250 x 700	
		Shipping Dimensions (WxHxD)		mm	1,100 x 320 x 780	1,100 x 320 x 780	
	Panel Size	Panel model		-	-	-	
		Panel Net Weight		kg	-	-	
		Shipping Weight		kg	-	-	
		Net Dimensions (WxHxD)		mm	-	-	
			Shipping Dimensions (WxHxD)	mm	-	-	
	Additional Accessories	Drain pump	Drain pump	-	MDP-G075SP	MDP-G075SP	
Max. Lifting			mm/liter/h	-	-		
Air Filter		-	-	-			
Outdoor Unit	Power Supply			Ø, #, V, Hz	1,2,220-240,50	1,2,220-240,50	
	Compressor	Type		-	Twin BLDC Rotary	Twin BLDC Rotary	
		Model		-	UG4T150LNBEQ	UG4T200LNFE4	
		Output		kW	1.42	1.85	
	Oil	Type		-	POE	POE	
		Fan	Air Flow Rate	Cooling	CMM	44.00	52.00
				l/s	733.33	866.67	
	Sound	Pressure	Cooling/Heating			48.0 / 48.0	49.0 / 50.0
			Power	Cooling	dB(A)	63.0	64.0
	External Dimension	Net Weight		kg	45.00	55.00	
		Shipping Weight		kg	48.00	59.00	
		Net Dimensions (WxHxD)		mm	880 x 638 x 310	880 x 798 x 310	
		Shipping Dimensions (WxHxD)		mm	1,024 x 750 x 414	1,023 x 891 x 413	
	Operating Temp. Range	Cooling		°C	-15.0 ~ 50.0	-15.0 ~ 50.0	
		Heating		°C	-20.0 ~ 24.0	-20.0 ~ 24.0	

- All figures comply with EN14511

- Nominal cooling capacities are based on;

Indoor temperature : 27°C DB, 19°C WB / Outdoor temperature : 35°C DB, Refrigerant piping : 5m , Level differences : 0m

- Nominal heating capacities are based on;

Indoor temperature : 20°C DB, 15°C WB / Outdoor temperature : 7°C DB, 6°C WB, Refrigerant piping : 5m, Level differences : 0m

- Sound level was acquired in an anechoic room. Thus actual noise level may be different depending on the installation conditions.

- Specifications may be subject to change without prior notice.

- These products contain R410A which is fluorinated greenhouse gas.

2 Specifications

Duct S

Type				Duct S	Duct S		
Model Name	Indoor Unit			AC071HBLDKH/EU	AC071HBMDKH/EU		
	Outdoor Unit			AC071HCADKH/EU	AC071HCADKH/EU		
System	Mode				Heat Pump	Heat Pump	
	Capacity	Cooling(Min/Std/Max)		kW	2.00 / 7.10 / 8.00	2.00 / 7.10 / 8.00	
				Btu/h	6,800 / 24,200 / 27,300	6,800 / 24,200 / 27,300	
		Heating(Min/Std/Max)		kW	1.50 / 8.00 / 9.00	1.50 / 8.00 / 9.00	
				Btu/h	5,100 / 27,300 / 30,700	5,100 / 27,300 / 30,700	
	Power	Power Input (Nominal)	Cooling(Min/Std/Max)	kW	0.47 / 2.21 / 3.00	0.47 / 2.21 / 3.00	
			Heating(Min/Std/Max)		0.36 / 2.30 / 3.50	0.36 / 2.30 / 3.50	
		Current Input (Nominal)	Cooling(Min/Std/Max)	A	2.80 / 9.80 / 13.30	2.80 / 9.80 / 13.30	
			Heating(Min/Std/Max)		2.20 / 10.20 / 15.50	2.20 / 10.20 / 15.50	
		MCA		A	22.00 (MCA)	22.70 (MCA)	
		MFA		A	25.00	25.00	
	Energy Efficiency	EER (Nominal Cooling)		-	3.21	3.21	
		COP (Nominal Heating)		-	3.48	3.48	
		Energy Grade		-	SEER 5.9 (A+)	SEER 5.9 (A+)	
				-	SCOP 4.0 (A+)	SCOP 4.0 (A+)	
	Piping Connections	Liquid Pipe		Ø, mm	6.35	6.35	
				Ø, inch	1/4"	1/4"	
		Gas Pipe		Ø, mm	15.88	15.88	
				Ø, inch	5/8"	5/8"	
		Installation Limitation	Max. Length	m	50 (55)	50 (55)	
Max. Height			m	30 (30)	30 (30)		
Field Wiring	Power Source Wire		Ø, mm	2.50	2.50		
	Transmission Cable		Ø, mm	0.75 ~ 1.25	0.75 ~ 1.25		
Refrigerant	Type		-	R410A	R410A		
	Control Method		-	-	-		
	Factory Charging		kg	1.50	1.50		
Indoor Unit	Power Supply			Ø, #, V, Hz	1,2,220-240,50	1,2,220-240,50	
	Fan	Type		-	Sirocco Fan(BLDC)	Sirocco Fan(BLDC)	
		Motor	Output		W	153 x 11	153 x 11
			Air Flow Rate		High/Mid/Low	CMM	20.00 / 15.00 / 10.00
		External Static Pressure		Min/Std/Max	mmAq	0.00 / 3.00 / 4.00	0.00 / 3.00 / 15.00
					Pa	0.00 / 29.40 / 39.20	0.00 / 29.40 / 147.00
	Drain	Drain Pipe		Ø,mm	VP20 (OD 26,ID 20)	VP20 (OD 26,ID 20)	
		Sound	Pressure	High/Mid/Low		37.0 / 34.0 / 31.0	37.0 / 33.0 / 29.0
	Power		Cooling		59.0	57.0	
	External Dimension	Net Weight		kg	22.50	24.50	
		Shipping Weight		kg	26.00	28.50	
		Net Dimensions (WxHxD)		mm	1,100 x 200 x 450	850 x 250 x 700	
		Shipping Dimensions (WxHxD)		mm	1,350 x 270 x 530	1,100 x 320 x 780	
	Panel Size	Panel model		-	-	-	
		Panel Net Weight		kg	-	-	
		Shipping Weight		kg	-	-	
		Net Dimensions (WxHxD)		mm	-	-	
	Additional Accessories	Shipping Dimensions (WxHxD)		mm	-	-	
		Drain pump	Drain pump		-	MDP-G075SP	MDP-G075SP
			Max. Lifting		mm/liter/h	-	-
Air Filter		-	-	-			
Outdoor Unit	Power Supply			Ø, #, V, Hz	1,2,220-240,50	1,2,220-240,50	
	Compressor	Type		-	Twin BLDC Rotary	Twin BLDC Rotary	
		Model		-	UG4T200LNFE4	UG4T200LNFE4	
		Output		kW	1.85	1.85	
		Oil	Type		-	POE	POE
	Fan		Air Flow Rate		Cooling	CMM	54.00
					l/s	900.00	900.00
	Sound	Pressure	Cooling/Heating		49.0 / 51.0	49.0 / 51.0	
		Power		Cooling		65.0	65.0
	External Dimension	Net Weight		kg	55.00	55.00	
		Shipping Weight		kg	59.00	59.00	
		Net Dimensions (WxHxD)		mm	880 x 798 x 310	880 x 798 x 310	
		Shipping Dimensions (WxHxD)		mm	1,023 x 891 x 413	1,023 x 891 x 413	
	Operating Temp. Range	Cooling		°C	-15.0 ~ 50.0	-15.0 ~ 50.0	
		Heating		°C	-20.0 ~ 24.0	-20.0 ~ 24.0	

- All figures comply with EN14511

- Nominal cooling capacities are based on;

Indoor temperature : 27°C DB, 19°C WB / Outdoor temperature : 35°C DB, Refrigerant piping : 5m , Level differences : 0m

- Nominal heating capacities are based on;

Indoor temperature : 20°C DB, 15°C WB / Outdoor temperature : 7°C DB, 6°C WB, Refrigerant piping : 5m, Level differences : 0m

- Sound level was acquired in an anechoic room. Thus actual noise level may be different depending on the installation conditions.

- Specifications may be subject to change without prior notice.

- These products contain R410A which is fluorinated greenhouse gas.

2 Specifications

Duct S

Type				Duct S	Duct S			
Model Name	Indoor Unit			AC090HBMDKH/EU	AC090HBMDKH/EU			
	Outdoor Unit			AC090HCADKH/EU	AC090HCADNH/EU			
System	Mode			Heat Pump	Heat Pump			
	Capacity	Cooling(Min/Std/Max)		kW	2.60 / 9.00 / 11.50	2.60 / 9.00 / 11.50		
				Btu/h	8,900 / 30,700 / 39,200	8,900 / 30,700 / 39,200		
		Heating(Min/Std/Max)		kW	2.80 / 10.00 / 15.50	2.80 / 10.00 / 15.50		
				Btu/h	9,600 / 34,100 / 52,900	9,600 / 34,100 / 52,900		
	Power	Power Input (Nominal)	Cooling(Min/Std/Max)		kW	0.70 / 2.80 / 4.50	0.70 / 2.80 / 4.50	
			Heating(Min/Std/Max)			0.65 / 2.77 / 5.50	0.65 / 2.70 / 5.50	
		Current Input (Nominal)	Cooling(Min/Std/Max)		A	4.00 / 13.00 / 19.50	1.50 / 4.50 / 7.30	
			Heating(Min/Std/Max)			3.40 / 12.50 / 24.00	1.40 / 4.50 / 9.00	
		MCA				A	26.70 (MCA)	14.70 (MCA)
		MFA				A	30.00	16.20
	Energy Efficiency	EER (Nominal Cooling)		-	3.21	3.21		
		COP (Nominal Heating)		-	3.61	3.70		
		Energy Grade		-	SEER 5.7 (A+)	SEER 5.7 (A+)		
				-	SCOP 4.0 (A+)	SCOP 4.0 (A+)		
	Piping Connections	Liquid Pipe		Ø, mm	9.52	9.52		
				Ø, inch	3/8"	3/8"		
		Gas Pipe		Ø, mm	15.88	15.88		
				Ø, inch	5/8"	5/8"		
		Installation Limitation	Max. Length	m	50 (55)	50 (55)		
Max. Height			m	30 (30)	30 (30)			
Field Wiring	Power Source Wire		Ø, mm	4.00	2.50			
	Transmission Cable		Ø, mm	0.75 ~ 1.25	0.75 ~ 1.25			
Refrigerant	Type		-	R410A	R410A			
	Control Method		-	-	-			
	Factory Charging		kg	2.60	2.60			
Indoor Unit	Power Supply			Ø, #, V, Hz	1,2,220-240,50	1,2,220-240,50		
	Fan	Type		-	Sirocco Fan(BLDC)	Sirocco Fan(BLDC)		
		Motor	Output		W	153 x 11	153 x 11	
			Air Flow Rate		High/Mid/Low	CMM	29.00 / 25.00 / 22.00	29.00 / 25.00 / 22.00
					l/s	483.33 / 416.67 / 366.67	483.33 / 416.67 / 366.67	
		External Static Pressure	Min/Std/Max		mmAq	0.00 / 4.00 / 15.00	0.00 / 4.00 / 15.00	
	Pa				0.00 / 39.20 / 147.00	0.00 / 39.20 / 147.00		
	Drain	Drain Pipe		Ø,mm	VP20 (OD 26,ID 20)	VP20 (OD 26,ID 20)		
		Sound	Pressure	High/Mid/Low		38.0 / 35.0 / 32.0	38.0 / 35.0 / 32.0	
			Power	Cooling		61.0	61.0	
	External Dimension	Net Weight		kg	32.00	32.00		
		Shipping Weight		kg	37.00	37.00		
		Net Dimensions (WxHxD)		mm	1,200 x 250 x 700	1,200 x 250 x 700		
		Shipping Dimensions (WxHxD)		mm	1,450 x 320 x 780	1,450 x 320 x 780		
	Panel Size	Panel model		-	-	-		
		Panel Net Weight		kg	-	-		
		Shipping Weight		kg	-	-		
		Net Dimensions (WxHxD)		mm	-	-		
	Shipping Dimensions (WxHxD)		mm	-	-			
	Additional Accessories	Drain pump	Drain pump		-	MDP-G075SP	MDP-G075SP	
Max. Lifting			mm/liter/h	-	-			
Air Filter		-	-	-				
Outdoor Unit	Power Supply			Ø, #, V, Hz	1,2,220-240,50	3,4,380-415,50		
	Compressor	Type		-	Twin BLDC Rotary	Twin BLDC Rotary		
		Model		-	UG8T300LNBJU	UG8T300FUCJU		
		Output		kW	2.82	2.82		
		Oil	Type		-	POE	POE	
	Fan		Air Flow Rate		Cooling	CMM	63.00	63.00
					l/s	1,050.00	1,050.00	
	Sound	Pressure	Cooling/Heating			52.0 / 54.0	52.0 / 54.0	
			Power		Cooling		68.0	68.0
	External Dimension	Net Weight		kg	70.00	72.00		
		Shipping Weight		kg	74.00	76.00		
		Net Dimensions (WxHxD)		mm	940 x 998 x 330	940 x 998 x 330		
		Shipping Dimensions (WxHxD)		mm	995 x 1,096 x 426	995 x 1,096 x 426		
	Operating Temp. Range	Cooling		°C	-15.0 ~ 50.0	-15.0 ~ 50.0		
		Heating		°C	-20.0 ~ 24.0	-20.0 ~ 24.0		

- All figures comply with EN14511

- Nominal cooling capacities are based on;

Indoor temperature : 27°C DB, 19°C WB / Outdoor temperature : 35°C DB, Refrigerant piping : 5m , Level differences : 0m

- Nominal heating capacities are based on;

Indoor temperature : 20°C DB, 15°C WB / Outdoor temperature : 7°C DB, 6°C WB, Refrigerant piping : 5m, Level differences : 0m

- Sound level was acquired in an anechoic room. Thus actual noise level may be different depending on the installation conditions.

- Specifications may be subject to change without prior notice.

- These products contain R410A which is fluorinated greenhouse gas.

2 Specifications

Duct S

Type				Duct S	Duct S			
Model Name	Indoor Unit			AC100HBMDKH/EU	AC100HBMDKH/EU			
	Outdoor Unit			AC100HCADNH/EU	AC100HCADKH/EU			
System	Mode				Heat Pump	Heat Pump		
	Capacity	Cooling(Min/Std/Max)		kW	2.80 / 10.00 / 12.00	2.80 / 10.00 / 12.00		
				Btu/h	9,600 / 34,100 / 40,900	9,600 / 34,100 / 40,900		
		Heating(Min/Std/Max)		kW	2.90 / 11.20 / 15.50	2.90 / 11.20 / 15.50		
				Btu/h	9,900 / 38,200 / 52,900	9,900 / 38,200 / 52,900		
	Power	Power Input (Nominal)	Cooling(Min/Std/Max)		kW	0.75 / 3.22 / 5.00	0.75 / 3.22 / 5.00	
			Heating(Min/Std/Max)			0.65 / 3.10 / 5.50	0.65 / 3.10 / 5.50	
		Current Input (Nominal)	Cooling(Min/Std/Max)		A	1.60 / 5.40 / 7.50	4.30 / 15.00 / 21.50	
			Heating(Min/Std/Max)			1.40 / 5.20 / 9.00	3.40 / 14.00 / 24.00	
		MCA				A	14.70 (MCA)	26.70 (MCA)
		MFA				A	16.20	30.00
	Energy Efficiency	EER (Nominal Cooling)		-	3.11	3.11		
		COP (Nominal Heating)		-	3.61	3.61		
		Energy Grade		-	SEER 5.6 (A+)	SEER 5.6 (A+)		
				-	SCOP 4.0 (A+)	SCOP 4.0 (A+)		
	Piping Connections	Liquid Pipe		Ø, mm	9.52	9.52		
				Ø, inch	3/8"	3/8"		
		Gas Pipe		Ø, mm	15.88	15.88		
				Ø, inch	5/8"	5/8"		
		Installation Limitation	Max. Length	m	50 (55)	50 (55)		
Max. Height			m	30 (30)	30 (30)			
Field Wiring	Power Source Wire		Ø, mm	2.50	4.00			
	Transmission Cable		Ø, mm	0.75 ~ 1.25	0.75 ~ 1.25			
Refrigerant	Type		-	R410A	R410A			
	Control Method		-	-	-			
	Factory Charging		kg	2.60	2.60			
Indoor Unit	Power Supply			Ø, #, V, Hz	1,2,220-240,50	1,2,220-240,50		
	Fan	Type		-	Sirocco Fan(BLDC)	Sirocco Fan(BLDC)		
		Motor	Output		W	153 x 11	153 x 11	
			Air Flow Rate		High/Mid/Low	CMM	32.00 / 27.00 / 22.00	32.00 / 27.00 / 22.00
					l/s	533.33 / 450.00 / 366.67	533.33 / 450.00 / 366.67	
		External Static Pressure	Min/Std/Max		mmAq	0.00 / 4.00 / 15.00	0.00 / 4.00 / 15.00	
	Pa				0.00 / 39.20 / 147.00	0.00 / 39.20 / 147.00		
	Drain	Drain Pipe		Ø,mm	VP20 (OD 26,ID 20)	VP20 (OD 26,ID 20)		
		Sound	Pressure	High/Mid/Low		38.0 / 35.0 / 32.0	38.0 / 35.0 / 32.0	
	Power		Cooling		61.0	61.0		
	External Dimension	Net Weight		kg	32.00	32.00		
		Shipping Weight		kg	37.00	37.00		
		Net Dimensions (WxHxD)		mm	1,200 x 250 x 700	1,200 x 250 x 700		
		Shipping Dimensions (WxHxD)		mm	1,450 x 320 x 780	1,450 x 320 x 780		
	Panel Size	Panel model		-	-	-		
		Panel Net Weight		kg	-	-		
		Shipping Weight		kg	-	-		
		Net Dimensions (WxHxD)		mm	-	-		
	Shipping Dimensions (WxHxD)		mm	-	-			
	Additional Accessories	Drain pump	Drain pump		-	MDP-G075SP	MDP-G075SP	
Max. Lifting			mm/liter/h	-	-			
Air Filter				-	-			
Outdoor Unit	Power Supply			Ø, #, V, Hz	3,4,380-415,50	1,2,220-240,50		
	Compressor	Type		-	Twin BLDC Rotary	Twin BLDC Rotary		
		Model		-	UG8T300FUCJU	UG8T300LNBJU		
		Output		kW	2.82	2.82		
		Oil	Type		-	POE	POE	
	Fan		Air Flow Rate	Cooling	CMM	68.00	68.00	
				l/s	1,133.33	1,133.33		
	Sound	Pressure	Cooling/Heating			52.0 / 54.0	52.0 / 54.0	
			Power		Cooling		69.0	69.0
	External Dimension	Net Weight		kg	72.00	70.00		
		Shipping Weight		kg	76.00	74.00		
		Net Dimensions (WxHxD)		mm	940 x 998 x 330	940 x 998 x 330		
		Shipping Dimensions (WxHxD)		mm	995 x 1,096 x 426	995 x 1,096 x 426		
	Operating Temp. Range	Cooling		°C	-15.0 ~ 50.0	-15.0 ~ 50.0		
		Heating		°C	-20.0 ~ 24.0	-20.0 ~ 24.0		

- All figures comply with EN14511

- Nominal cooling capacities are based on;

Indoor temperature : 27°C DB, 19°C WB / Outdoor temperature : 35°C DB, Refrigerant piping : 5m , Level differences : 0m

- Nominal heating capacities are based on;

Indoor temperature : 20°C DB, 15°C WB / Outdoor temperature : 7°C DB, 6°C WB, Refrigerant piping : 5m, Level differences : 0m

- Sound level was acquired in an anechoic room. Thus actual noise level may be different depending on the installation conditions.

- Specifications may be subject to change without prior notice.

- These products contain R410A which is fluorinated greenhouse gas.

2 Specifications

Duct S

Type				Duct S	Duct S		
Model Name	Indoor Unit			AC120HBMDKH/EU	AC120HBMDKH/EU		
	Outdoor Unit			AC120HCADNH/EU	AC120HCADKH/EU		
System	Mode				Heat Pump	Heat Pump	
	Capacity	Cooling(Min/Std/Max)		kW	3.00 / 12.00 / 13.50	3.00 / 12.00 / 13.50	
				Btu/h	10,200 / 40,900 / 46,100	10,200 / 40,900 / 46,100	
		Heating(Min/Std/Max)		kW	2.50 / 13.00 / 17.00	2.50 / 13.00 / 17.00	
				Btu/h	8,500 / 44,400 / 58,000	8,500 / 44,400 / 58,000	
	Power	Power Input (Nominal)	Cooling(Min/Std/Max)	kW	0.90 / 4.40 / 5.40	0.90 / 4.40 / 5.50	
			Heating(Min/Std/Max)		0.70 / 3.50 / 5.90	0.70 / 3.50 / 5.90	
		Current Input (Nominal)	Cooling(Min/Std/Max)	A	1.90 / 7.00 / 8.60	5.00 / 19.50 / 24.00	
			Heating(Min/Std/Max)		1.50 / 5.80 / 9.00	4.00 / 15.50 / 26.50	
		MCA		A	14.70 (MCA)	26.70 (MCA)	
		MFA		A	16.20	30.00	
	Energy Efficiency	EER (Nominal Cooling)		-	2.73	2.73	
		COP (Nominal Heating)		-	3.71	3.71	
		Energy Grade		-	SEER 5.3 (A)	SEER 5.3 (A)	
				-	SCOP 4.0 (A)	SCOP 4.0 (A+)	
	Piping Connections	Liquid Pipe		Ø, mm	9.52	9.52	
				Ø, inch	3/8"	3/8"	
		Gas Pipe		Ø, mm	15.88	15.88	
				Ø, inch	5/8"	5/8"	
		Installation Limitation	Max. Length	m	50 (55)	50 (55)	
Max. Height			m	30 (30)	30 (30)		
Field Wiring	Power Source Wire		Ø, mm	2.50	4.00		
	Transmission Cable		Ø, mm	0.75 ~ 1.25	0.75 ~ 1.25		
Refrigerant	Type		-	R410A	R410A		
	Control Method		-	-	-		
	Factory Charging		kg	2.70	2.70		
Indoor Unit	Power Supply			Ø, #, V, Hz	1,2,220-240,50	1,2,220-240,50	
	Fan	Type		-	Sirocco Fan(BLDC)	Sirocco Fan(BLDC)	
		Motor	Output		W	244 x 11	244 x 11
			Air Flow Rate		High/Mid/Low	CMM	38.00 / 32.00 / 25.00
					l/s	633.33 / 533.33 / 416.67	633.33 / 533.33 / 416.67
		External Static Pressure	Min/Std/Max		mmAq	0.00 / 5.20 / 15.00	0.00 / 5.20 / 15.00
	Pa				0.00 / 50.96 / 147.00	0.00 / 50.96 / 147.00	
	Drain	Drain Pipe		Ø,mm	VP20 (OD 26,ID 20)	VP20 (OD 26,ID 20)	
		Sound	Pressure	High/Mid/Low	dB(A)	39.0 / 36.0 / 33.0	39.0 / 36.0 / 33.0
			Power	Cooling	65.0	65.0	
	External Dimension	Net Weight		kg	36.00	36.00	
		Shipping Weight		kg	42.00	42.00	
		Net Dimensions (WxHxD)		mm	1,300 x 300 x 700	1,300 x 300 x 700	
		Shipping Dimensions (WxHxD)		mm	1,550 x 370 x 780	1,550 x 370 x 780	
	Panel Size	Panel model		-	-	-	
		Panel Net Weight		kg	-	-	
		Shipping Weight		kg	-	-	
		Net Dimensions (WxHxD)		mm	-	-	
	Shipping Dimensions (WxHxD)		mm	-	-		
	Additional Accessories	Drain pump	Drain pump	-	MDP-G075SP	MDP-G075SP	
Max. Lifting			mm/liter/h	-	-		
Air Filter		-	-	-			
Outdoor Unit	Power Supply			Ø, #, V, Hz	3,4,380-415,50	1,2,220-240,50	
	Compressor	Type		-	Twin BLDC Rotary	Twin BLDC Rotary	
		Model		-	UG5T450FUFJXSG	UG5T450FUEJXSG	
		Output		kW	4.12	4.12	
	Oil	Type		-	POE	POE	
		Fan	Air Flow Rate	Cooling	CMM	70.00	70.00
				l/s	1,166.67	1,166.67	
	Sound	Pressure	Cooling/Heating	dB(A)	54.0 / 56.0	54.0 / 58.0	
		Power	Cooling		70.0	70.0	
	External Dimension	Net Weight		kg	79.00	77.00	
		Shipping Weight		kg	84.00	82.00	
		Net Dimensions (WxHxD)		mm	940 x 998 x 330	940 x 998 x 330	
		Shipping Dimensions (WxHxD)		mm	995 x 1,096 x 426	995 x 1,096 x 426	
	Operating Temp. Range	Cooling		°C	-15.0 ~ 50.0	-15.0 ~ 50.0	
		Heating		°C	-20.0 ~ 24.0	-20.0 ~ 24.0	

- All figures comply with EN14511

- Nominal cooling capacities are based on;

Indoor temperature : 27°C DB, 19°C WB / Outdoor temperature : 35°C DB, Refrigerant piping : 5m , Level differences : 0m

- Nominal heating capacities are based on;

Indoor temperature : 20°C DB, 15°C WB / Outdoor temperature : 7°C DB, 6°C WB, Refrigerant piping : 5m, Level differences : 0m

- Sound level was acquired in an anechoic room. Thus actual noise level may be different depending on the installation conditions.

- Specifications may be subject to change without prior notice.

- These products contain R410A which is fluorinated greenhouse gas.

2 Specifications

Duct S

Type				Duct S	Duct S		
Model Name	Indoor Unit			AC140HBMDKH/EU	AC140HBMDKH/EU		
	Outdoor Unit			AC140HCADNH/EU	AC140HCADKH/EU		
System	Mode				Heat Pump	Heat Pump	
	Capacity	Cooling(Min/Std/Max)		kW	4.60 / 14.00 / 15.40	4.60 / 14.00 / 15.40	
				Btu/h	15,700 / 47,800 / 52,500	15,700 / 47,800 / 52,500	
		Heating(Min/Std/Max)		kW	3.70 / 16.00 / 18.00	3.70 / 16.00 / 18.00	
				Btu/h	12,600 / 54,600 / 61,400	12,600 / 54,600 / 61,400	
	Power	Power Input (Nominal)	Cooling(Min/Std/Max)	kW	1.00 / 4.63 / 5.50	1.00 / 4.63 / 5.50	
			Heating(Min/Std/Max)		0.80 / 4.43 / 5.70	0.80 / 4.43 / 5.70	
		Current Input (Nominal)	Cooling(Min/Std/Max)	A	2.10 / 7.50 / 9.50	5.60 / 21.60 / 24.00	
			Heating(Min/Std/Max)		1.70 / 7.10 / 8.80	4.50 / 19.70 / 25.00	
		MCA		A	14.70 (MCA)	26.70 (MCA)	
		MFA		A	16.20	30.00	
	Energy Efficiency	EER (Nominal Cooling)		-	3.02	3.02	
		COP (Nominal Heating)		-	3.61	3.61	
		Energy Grade		-	-	-	
	Piping Connections	Liquid Pipe		Ø, mm	9.52	9.52	
				Ø, inch	3/8"	3/8"	
		Gas Pipe		Ø, mm	15.88	15.88	
				Ø, inch	5/8"	5/8"	
		Installation Limitation	Max. Length	m	75 (75)	75 (75)	
			Max. Height	m	30 (30)	30 (30)	
Field Wiring	Power Source Wire		Ø, mm	2.50	4.00		
	Transmission Cable		Ø, mm	0.75 ~ 1.25	0.75 ~ 1.25		
Refrigerant	Type		-	R410A	R410A		
	Control Method		-	-	-		
	Factory Charging		kg	2.80	2.80		
Indoor Unit	Power Supply			Ø, #, V, Hz	1,2,220-240,50	1,2,220-240,50	
	Fan	Type		-	Sirocco Fan(BLDC)	Sirocco Fan(BLDC)	
		Motor	Output		W	244 x 11	244 x 11
			Air Flow Rate		High/Mid/Low	CMM	42.00 / 34.00 / 25.00
		External Static Pressure		Min/Std/Max	l/s	700.00 / 566.67 / 416.67	700.00 / 566.67 / 416.67
		Drain	Drain Pipe		Ø,mm	VP20 (OD 26,ID 20)	VP20 (OD 26,ID 20)
	Sound		Pressure	High/Mid/Low	dB(A)	40.0 / 37.0 / 33.0	40.0 / 37.0 / 33.0
		Power	Cooling		66.0	66.0	
	External Dimension	Net Weight		kg	36.00	36.00	
		Shipping Weight		kg	42.00	42.00	
		Net Dimensions (WxHxD)		mm	1,300 x 300 x 700	1,300 x 300 x 700	
		Shipping Dimensions (WxHxD)		mm	1,550 x 370 x 780	1,550 x 370 x 780	
	Panel Size	Panel model		-	-	-	
		Panel Net Weight		kg	-	-	
		Shipping Weight		kg	-	-	
		Net Dimensions (WxHxD)		mm	-	-	
	Additional Accessories	Shipping Dimensions (WxHxD)		mm	-	-	
		Drain pump	Drain pump	-	MDP-G075SP	MDP-G075SP	
			Max. Lifting	mm/liter/h	-	-	
	Air Filter		-	-	-		
Outdoor Unit	Power Supply			Ø, #, V, Hz	3,4,380-415,50	1,2,220-240,50	
	Compressor	Type		-	Twin BLDC Rotary	Twin BLDC Rotary	
		Model		-	UG5T450FUFJXSG	UG5T450FUEJXSG	
		Output		kW	4.12	4.12	
	Fan	Oil	Type	-	POE	POE	
			Air Flow Rate	Cooling	CMM	100.00	100.00
	Sound	Pressure	Cooling/Heating	dB(A)	53.0 / 54.0	53.0 / 54.0	
			Power	Cooling		70.0	70.0
	External Dimension	Net Weight		kg	90.00	88.00	
		Shipping Weight		kg	100.00	98.00	
		Net Dimensions (WxHxD)		mm	940 x 1,210 x 330	940 x 1,210 x 330	
		Shipping Dimensions (WxHxD)		mm	995 x 1,388 x 426	995 x 1,388 x 426	
	Operating Temp. Range	Cooling		°C	-15.0 ~ 50.0	-15.0 ~ 50.0	
		Heating		°C	-20.0 ~ 24.0	-20.0 ~ 24.0	

- All figures comply with EN14511

- Nominal cooling capacities are based on;

Indoor temperature : 27°C DB, 19°C WB / Outdoor temperature : 35°C DB, Refrigerant piping : 5m , Level differences : 0m

- Nominal heating capacities are based on;

Indoor temperature : 20°C DB, 15°C WB / Outdoor temperature : 7°C DB, 6°C WB, Refrigerant piping : 5m, Level differences : 0m

- Sound level was acquired in an anechoic room. Thus actual noise level may be different depending on the installation conditions.

- Specifications may be subject to change without prior notice.

- These products contain R410A which is fluorinated greenhouse gas.

3 Capacity table

Duct S

AC026HBLDKH/EU + AC026HCADKH/EU

Cooling

TC(Total Capacity), SHC(Sensible Heat Capacity), PI(Power Input)

Outdoor temperature (°C, DB)	Indoor temperature (°C, WB)																	
	14.0			16.0			18.0			19.0			22.0			24.0		
	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI
-15.0	2.92	2.34	0.44	2.99	2.39	0.45	3.06	2.45	0.46	3.14	2.51	0.47	3.22	2.57	0.48	3.29	2.63	0.49
21.0	2.89	2.31	0.50	2.96	2.37	0.51	3.04	2.43	0.53	3.11	2.49	0.54	3.18	2.55	0.55	3.26	2.61	0.57
35.0	2.42	1.93	0.65	2.48	1.98	0.67	2.54	2.03	0.68	2.60	2.08	0.70	2.66	2.13	0.72	2.73	2.18	0.73
46.0	2.07	1.66	0.82	2.12	1.70	0.84	2.18	1.74	0.86	2.23	1.78	0.88	2.28	1.83	0.90	2.34	1.87	0.92
50.0	1.51	2.09	1.33	1.54	2.14	1.36	1.58	2.20	1.40	1.62	1.30	0.67	1.66	1.33	0.83	1.70	1.36	0.85

Heating

TC : Total Capacity, PI: Power Input

Outdoor temperature (°C, DB)	Indoor temperature (°C, DB)											
	16.0		18.0		20.0		21.0		22.0		24.0	
	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI
-20.0	1.53	0.69	1.52	0.69	1.50	0.68	1.49	0.67	1.47	0.67	1.46	0.66
-10.0	2.47	0.90	2.44	0.89	2.42	0.88	2.40	0.87	2.37	0.86	2.35	0.85
7.0	3.37	0.89	3.33	0.88	3.30	0.87	3.27	0.86	3.23	0.85	3.20	0.84
24.0	4.17	0.91	4.13	0.90	4.09	0.89	4.05	0.88	4.01	0.87	3.97	0.86

AC035HBLDKH/EU + AC035HCADKH/EU

Cooling

TC(Total Capacity), SHC(Sensible Heat Capacity), PI(Power Input)

Outdoor temperature (°C, DB)	Indoor temperature (°C, WB)																	
	14.0			16.0			18.0			19.0			22.0			24.0		
	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI
-15.0	3.93	3.14	0.72	4.02	3.22	0.73	4.12	3.30	0.75	4.22	3.38	0.77	4.32	3.46	0.79	4.43	3.54	0.81
21.0	3.89	3.11	0.82	3.98	3.19	0.84	4.08	3.26	0.86	4.18	3.34	0.88	4.28	3.42	0.90	4.38	3.51	0.92
35.0	3.25	2.60	1.07	3.33	2.67	1.10	3.42	2.73	1.12	3.50	2.80	1.15	3.58	2.87	1.18	3.67	2.94	1.21
46.0	2.79	2.23	1.35	2.86	2.29	1.38	2.93	2.34	1.42	3.00	2.40	1.45	3.07	2.46	1.48	3.15	2.52	1.52
50.0	2.03	2.09	1.33	2.08	2.14	1.36	2.13	2.20	1.40	2.18	1.74	1.10	2.23	1.79	1.36	2.29	1.83	1.40

Heating

TC : Total Capacity PI: Power Input

Outdoor temperature (°C, DB)	Indoor temperature (°C, DB)											
	16.0		18.0		20.0		21.0		22.0		24.0	
	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI
-20.0	1.86	0.94	1.84	0.93	1.82	0.92	1.80	0.91	1.78	0.90	1.77	0.89
-10.0	2.99	1.22	2.96	1.21	2.93	1.20	2.90	1.19	2.87	1.18	2.84	1.16
7.0	4.08	1.20	4.04	1.19	4.00	1.18	3.96	1.17	3.92	1.16	3.88	1.14
24.0	5.06	1.23	5.01	1.22	4.96	1.21	4.91	1.20	4.86	1.19	4.81	1.17

- Capacities are based on following conditions;

- . Cooling mode indoor air temperature (°C, DB/WB) : 20/14, 22/16, 25/18, 27/19, 30/22, 32/24
- . Heating mode outdoor air : 85%RH. However, the condition rated capacity is 7°C DB / 6°C WB.
- . Refrigerant piping length : 5m
- . Level difference : 0m.

3 Capacity table

Duct S

AC035HBMDKH/EU + AC035HCADKH/EU

Cooling

TC(Total Capacity), SHC(Sensible Heat Capacity), PI(Power Input)

Outdoor temperature (°C, DB)	Indoor temperature (°C, WB)																	
	14.0			16.0			18.0			19.0			22.0			24.0		
	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI
-15.0	3.95	3.16	0.66	4.05	3.24	0.68	4.15	3.32	0.69	4.25	3.40	0.71	4.35	3.48	0.73	4.46	3.57	0.74
21.0	3.86	3.09	1.08	3.95	3.16	1.10	4.05	3.24	1.13	4.15	3.32	1.16	4.25	3.40	1.19	4.35	3.48	1.22
35.0	3.25	2.60	1.02	3.33	2.67	1.05	3.42	2.73	1.07	3.50	2.80	1.10	3.58	2.87	1.13	3.67	2.94	1.15
46.0	2.98	2.38	1.28	3.05	2.44	1.31	3.12	2.50	1.35	3.20	2.56	1.38	3.28	2.62	1.41	3.36	2.68	1.45
50.0	2.79	2.09	1.33	2.86	2.14	1.36	2.93	2.20	1.40	3.00	2.40	1.46	3.07	2.46	1.81	3.15	2.52	1.85

Heating

TC : Total Capacity, PI: Power Input

Outdoor temperature (°C, DB)	Indoor temperature (°C, DB)											
	16.0		18.0		20.0		21.0		22.0		24.0	
	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI
-20.0	2.25	1.31	2.23	1.29	2.21	1.28	2.19	1.27	2.17	1.25	2.14	1.24
-10.0	3.38	1.26	3.34	1.25	3.31	1.24	3.28	1.23	3.24	1.22	3.21	1.20
7.0	4.08	1.04	4.04	1.03	4.00	1.02	3.96	1.01	3.92	1.00	3.88	0.99
24.0	4.36	1.35	4.31	1.33	4.27	1.32	4.23	1.31	4.19	1.29	4.14	1.28

AC052HBLDKH/EU + AC052HCADKH/EU

Cooling

TC(Total Capacity), SHC(Sensible Heat Capacity), PI(Power Input)

Outdoor temperature (°C, DB)	Indoor temperature (°C, WB)																	
	14.0			16.0			18.0			19.0			22.0			24.0		
	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI
-15.0	5.16	4.13	1.32	5.29	4.23	1.35	5.42	4.34	1.39	5.56	4.44	1.42	5.69	4.55	1.45	5.82	4.66	1.49
21.0	5.11	4.09	1.47	5.24	4.19	1.51	5.37	4.29	1.54	5.50	4.40	1.58	5.63	4.51	1.62	5.77	4.61	1.66
35.0	4.65	3.72	1.45	4.76	3.81	1.49	4.88	3.90	1.52	5.00	4.00	1.56	5.12	4.10	1.60	5.24	4.19	1.64
46.0	3.74	2.99	1.60	3.83	3.06	1.63	3.92	3.14	1.67	4.02	3.22	1.72	4.12	3.29	1.76	4.22	3.37	1.80
50.0	3.36	2.09	1.33	3.45	2.14	1.36	3.53	2.20	1.40	3.62	2.89	1.96	3.70	2.96	2.43	3.79	3.03	2.49

Heating

TC : Total Capacity PI: Power Input

Outdoor temperature (°C, DB)	Indoor temperature (°C, DB)											
	16.0		18.0		20.0		21.0		22.0		24.0	
	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI
-20.0	3.47	1.62	3.43	1.61	3.40	1.59	3.37	1.57	3.33	1.56	3.30	1.54
-10.0	4.28	2.17	4.24	2.15	4.20	2.13	4.16	2.11	4.12	2.09	4.08	2.07
7.0	6.12	1.69	6.06	1.68	6.00	1.66	5.94	1.64	5.88	1.63	5.82	1.61
24.0	6.32	1.79	6.26	1.77	6.20	1.75	6.14	1.73	6.08	1.72	6.02	1.70

- Capacities are based on following conditions;

- . Cooling mode indoor air temperature (°C, DB/WB) : 20/14, 22/16, 25/18, 27/19, 30/22, 32/24
- . Heating mode outdoor air : 85%RH. However, the condition rated capacity is 7°C DB / 6°C WB.
- . Refrigerant piping length : 5m
- . Level difference : 0m.

3 Capacity table

Duct S

AC052HBMDKH/EU + AC052HCADKH/EU

Cooling

TC(Total Capacity), SHC(Sensible Heat Capacity), PI(Power Input)

Outdoor temperature (°C, DB)	Indoor temperature (°C, WB)																	
	14.0			16.0			18.0			19.0			22.0			24.0		
	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI
-15.0	5.22	4.17	1.32	5.34	4.28	1.35	5.48	4.38	1.39	5.61	4.49	1.42	5.74	4.60	1.45	5.88	4.71	1.49
21.0	5.11	4.09	1.47	5.24	4.19	1.51	5.37	4.29	1.54	5.50	4.40	1.58	5.63	4.51	1.62	5.77	4.61	1.66
35.0	4.65	3.72	1.45	4.76	3.81	1.49	4.88	3.90	1.52	5.00	4.00	1.56	5.12	4.10	1.60	5.24	4.19	1.64
46.0	3.74	2.99	1.93	3.83	3.06	1.98	3.92	3.14	2.03	4.02	3.22	2.08	4.12	3.29	2.13	4.22	3.37	2.18
50.0	3.37	2.09	1.33	3.45	2.14	1.36	3.53	2.20	1.40	3.62	2.90	1.96	3.71	2.97	2.43	3.80	3.04	2.49

Heating

TC : Total Capacity, PI: Power Input

Outdoor temperature (°C, DB)	Indoor temperature (°C, DB)											
	16.0		18.0		20.0		21.0		22.0		24.0	
	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI
-20.0	3.47	1.62	3.43	1.61	3.40	1.59	3.37	1.57	3.33	1.56	3.30	1.54
-10.0	4.28	2.17	4.24	2.15	4.20	2.13	4.16	2.11	4.12	2.09	4.08	2.07
7.0	6.12	1.69	6.06	1.68	6.00	1.66	5.94	1.64	5.88	1.63	5.82	1.61
24.0	6.32	1.79	6.26	1.77	6.20	1.75	6.14	1.73	6.08	1.72	6.02	1.70

AC060HBMDKH/EU + AC060HCADKH/EU

Cooling

TC(Total Capacity), SHC(Sensible Heat Capacity), PI(Power Input)

Outdoor temperature (°C, DB)	Indoor temperature (°C, WB)																	
	14.0			16.0			18.0			19.0			22.0			24.0		
	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI
-15.0	6.29	5.04	1.45	6.45	5.16	1.49	6.61	5.29	1.52	6.77	5.42	1.56	6.93	5.55	1.60	7.10	5.68	1.64
21.0	6.08	4.86	1.50	6.23	4.98	1.53	6.38	5.11	1.57	6.54	5.23	1.61	6.70	5.36	1.65	6.86	5.49	1.69
35.0	5.58	4.46	1.64	5.72	4.57	1.68	5.86	4.68	1.72	6.00	4.80	1.76	6.14	4.92	1.80	6.29	5.03	1.85
46.0	5.39	4.31	2.70	5.52	4.42	2.76	5.66	4.53	2.83	5.20	4.64	2.71	5.94	4.75	2.97	6.08	4.87	3.04
50.0	5.30	4.24	2.60	5.43	4.35	2.67	5.57	4.45	2.73	4.76	4.56	2.42	5.84	4.67	3.47	5.98	4.79	3.56

Heating

TC : Total Capacity PI: Power Input

Outdoor temperature (°C, DB)	Indoor temperature (°C, DB)											
	16.0		18.0		20.0		21.0		22.0		24.0	
	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI
-20.0	3.77	1.82	3.74	1.80	3.70	1.78	3.66	1.76	3.63	1.74	3.59	1.73
-10.0	5.81	2.40	5.76	2.37	5.70	2.35	5.64	2.33	5.59	2.30	5.53	2.28
7.0	7.14	1.93	7.07	1.91	7.00	1.89	6.93	1.87	6.86	1.85	6.79	1.83
24.0	9.08	2.30	8.99	2.27	8.90	2.25	8.81	2.23	8.72	2.21	8.64	2.18

- Capacities are based on following conditions;

- . Cooling mode indoor air temperature (°C, DB/WB) : 20/14, 22/16, 25/18, 27/19, 30/22, 32/24
- . Heating mode outdoor air : 85%RH. However, the condition rated capacity is 7°C DB / 6°C WB.
- . Refrigerant piping length : 5m
- . Level difference : 0m.

3 Capacity table

Duct S

AC071HBLDKH/EU + AC071HCADKH/EU

Cooling

TC(Total Capacity), SHC(Sensible Heat Capacity), PI(Power Input)

Outdoor temperature (°C, DB)	Indoor temperature (°C, WB)																	
	14.0			16.0			18.0			19.0			22.0			24.0		
	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI
-15.0	6.83	5.47	1.67	7.00	5.60	1.71	7.17	5.74	1.75	7.35	5.88	1.79	7.53	6.02	1.84	7.71	6.17	1.88
21.0	7.29	5.83	1.59	7.47	5.97	1.63	7.65	6.12	1.67	7.84	6.27	1.71	8.03	6.42	1.75	8.22	6.58	1.80
35.0	6.60	5.28	2.05	6.76	5.41	2.10	6.93	5.54	2.15	7.10	5.68	2.20	7.27	5.82	2.25	7.44	5.96	2.31
46.0	6.24	4.99	2.93	6.39	5.11	3.00	6.55	5.24	3.07	6.12	5.37	3.15	6.87	5.50	3.23	7.04	5.63	3.30
50.0	5.28	4.22	2.90	5.41	4.33	2.97	5.54	4.43	3.05	5.68	4.54	3.12	5.82	4.65	3.87	5.96	4.76	3.96

Heating

TC : Total Capacity, PI: Power Input

Outdoor temperature (°C, DB)	Indoor temperature (°C, DB)											
	16.0		18.0		20.0		21.0		22.0		24.0	
	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI
-20.0	4.08	3.16	4.04	3.13	4.00	3.10	3.96	3.07	3.92	3.04	3.88	3.01
-10.0	5.30	3.57	5.25	3.54	5.20	3.50	5.15	3.47	5.10	3.43	5.05	3.40
7.0	8.16	2.35	8.08	2.32	8.00	2.30	7.92	2.28	7.84	2.25	7.76	2.23
24.0	9.69	2.75	9.60	2.73	9.50	2.70	9.41	2.67	9.31	2.65	9.22	2.62

AC071HBMDKH/EU + AC071HCADKH/EU

Cooling

TC(Total Capacity), SHC(Sensible Heat Capacity), PI(Power Input)

Outdoor temperature (°C, DB)	Indoor temperature (°C, WB)																	
	14.0			16.0			18.0			19.0			22.0			24.0		
	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI
-15.0	6.83	5.47	1.67	7.00	5.60	1.71	7.17	5.74	1.75	7.35	5.88	1.79	7.53	6.02	1.84	7.71	6.17	1.88
21.0	7.29	5.83	1.59	7.47	5.97	1.63	7.65	6.12	1.67	7.84	6.27	1.71	8.03	6.42	1.75	8.22	6.58	1.80
35.0	6.60	5.28	2.05	6.76	5.41	2.10	6.93	5.54	2.15	7.10	5.68	2.20	7.27	5.82	2.25	7.44	5.96	2.31
46.0	6.24	4.99	2.93	6.39	5.11	3.00	6.55	5.24	3.07	6.12	5.37	3.15	6.87	5.50	3.23	7.04	5.63	3.30
50.0	5.28	4.22	2.90	5.41	4.33	2.97	5.54	4.43	3.05	5.68	4.54	3.12	5.82	4.65	3.87	5.96	4.76	3.96

Heating

TC : Total Capacity PI: Power Input

Outdoor temperature (°C, DB)	Indoor temperature (°C, DB)											
	16.0		18.0		20.0		21.0		22.0		24.0	
	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI
-20.0	4.08	3.16	4.04	3.13	4.00	3.10	3.96	3.07	3.92	3.04	3.88	3.01
-10.0	5.30	3.57	5.25	3.54	5.20	3.50	5.15	3.47	5.10	3.43	5.05	3.40
7.0	8.16	2.35	8.08	2.32	8.00	2.30	7.92	2.28	7.84	2.25	7.76	2.23
24.0	9.69	2.75	9.60	2.73	9.50	2.70	9.41	2.67	9.31	2.65	9.22	2.62

- Capacities are based on following conditions;

- . Cooling mode indoor air temperature (°C, DB/WB) : 20/14, 22/16, 25/18, 27/19, 30/22, 32/24
- . Heating mode outdoor air : 85%RH. However, the condition rated capacity is 7°C DB / 6°C WB.
- . Refrigerant piping length : 5m
- . Level difference : 0m.

3 Capacity table

Duct S

AC090HBMDKH/EU + AC090HCADKH/EU

Cooling

TC(Total Capacity), SHC(Sensible Heat Capacity), PI(Power Input)

Outdoor temperature (°C, DB)	Indoor temperature (°C, WB)																	
	14.0			16.0			18.0			19.0			22.0			24.0		
	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI
-15.0	9.44	7.55	2.45	9.67	7.73	2.51	9.91	7.93	2.57	10.15	8.12	2.63	10.39	8.31	2.69	10.64	8.51	2.76
21.0	9.48	7.59	2.46	9.72	7.77	2.52	9.96	7.96	2.59	10.20	8.16	2.65	10.44	8.36	2.71	10.70	8.56	2.78
35.0	8.37	6.69	2.60	8.57	6.86	2.67	8.78	7.03	2.73	9.00	7.20	2.80	9.22	7.37	2.87	9.44	7.55	2.94
46.0	7.34	5.88	3.44	7.53	6.02	3.52	7.71	6.17	3.61	6.90	6.32	3.20	8.09	6.47	3.79	8.28	6.63	3.88
50.0	6.04	4.83	3.35	6.19	4.95	3.43	6.34	5.08	3.51	5.50	5.20	2.80	6.66	5.32	4.46	6.82	5.45	4.57

Heating

TC : Total Capacity, PI: Power Input

Outdoor temperature (°C, DB)	Indoor temperature (°C, DB)											
	16.0		18.0		20.0		21.0		22.0		24.0	
	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI
-20.0	6.37	2.90	6.30	2.87	6.24	2.84	6.18	2.81	6.12	2.78	6.05	2.76
-10.0	10.76	4.78	10.66	4.74	10.55	4.69	10.44	4.64	10.34	4.60	10.24	4.55
7.0	10.20	2.83	10.10	2.80	10.00	2.77	9.90	2.74	9.80	2.71	9.70	2.69
24.0	13.47	3.57	13.33	3.54	13.20	3.50	13.07	3.47	12.94	3.43	12.81	3.40

AC090HBMDKH/EU + AC090HCADNH/EU

Cooling

TC(Total Capacity), SHC(Sensible Heat Capacity), PI(Power Input)

Outdoor temperature (°C, DB)	Indoor temperature (°C, WB)																	
	14.0			16.0			18.0			19.0			22.0			24.0		
	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI
-15.0	9.44	7.55	2.45	9.67	7.73	2.51	9.91	7.93	2.57	10.15	8.12	2.63	10.39	8.31	2.69	10.64	8.51	2.76
21.0	9.48	7.59	2.46	9.72	7.77	2.52	9.96	7.96	2.59	10.20	8.16	2.65	10.44	8.36	2.71	10.70	8.56	2.78
35.0	8.37	6.69	2.60	8.57	6.86	2.67	8.78	7.03	2.73	9.00	7.20	2.80	9.22	7.37	2.87	9.44	7.55	2.94
46.0	7.34	5.88	3.44	7.53	6.02	3.52	7.71	6.17	3.61	6.90	6.32	3.20	8.09	6.47	3.79	8.28	6.63	3.88
50.0	6.04	4.83	3.35	6.19	4.95	3.43	6.34	5.08	3.51	5.50	5.20	2.80	6.66	5.32	4.46	6.82	5.45	4.57

Heating

TC : Total Capacity PI: Power Input

Outdoor temperature (°C, DB)	Indoor temperature (°C, DB)											
	16.0		18.0		20.0		21.0		22.0		24.0	
	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI
-20.0	6.37	2.90	6.30	2.87	6.24	2.84	6.18	2.81	6.12	2.78	6.05	2.76
-10.0	10.76	4.78	10.66	4.74	10.55	4.69	10.44	4.64	10.34	4.60	10.24	4.55
7.0	10.20	2.83	10.10	2.80	10.00	2.77	9.90	2.74	9.80	2.71	9.70	2.69
24.0	13.47	3.57	13.33	3.54	13.20	3.50	13.07	3.47	12.94	3.43	12.81	3.40

- Capacities are based on following conditions;

- . Cooling mode indoor air temperature (°C, DB/WB) : 20/14, 22/16, 25/18, 27/19, 30/22, 32/24
- . Heating mode outdoor air : 85%RH. However, the condition rated capacity is 7°C DB / 6°C WB.
- . Refrigerant piping length : 5m
- . Level difference : 0m.

3 Capacity table

Duct S

AC100HBMDKH/EU + AC100HCADNH/EU

Cooling

TC(Total Capacity), SHC(Sensible Heat Capacity), PI(Power Input)

Outdoor temperature (°C, DB)	Indoor temperature (°C, WB)																	
	14.0			16.0			18.0			19.0			22.0			24.0		
	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI
-15.0	9.76	7.81	2.70	10.00	8.00	2.76	10.25	8.20	2.83	10.50	8.40	2.90	10.75	8.60	2.97	11.01	8.81	3.04
21.0	10.23	8.18	2.79	10.48	8.38	2.86	10.74	8.59	2.93	11.00	8.80	3.00	11.26	9.01	3.07	11.53	9.23	3.15
35.0	9.30	7.44	2.99	9.53	7.62	3.06	9.76	7.81	3.14	10.00	8.00	3.22	10.24	8.19	3.29	10.49	8.39	3.37
46.0	6.90	5.52	3.37	7.07	5.65	3.46	7.24	5.79	3.54	7.42	5.93	3.63	7.60	6.08	3.72	7.78	6.22	3.81
50.0	5.34	2.09	1.33	5.47	2.14	1.36	5.60	2.20	1.40	5.74	4.59	3.00	5.88	4.70	3.72	6.02	4.82	3.81

Heating

TC : Total Capacity, PI: Power Input

Outdoor temperature (°C, DB)	Indoor temperature (°C, DB)											
	16.0		18.0		20.0		21.0		22.0		24.0	
	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI
-20.0	7.34	3.06	7.27	3.03	7.20	3.00	7.13	2.97	7.06	2.94	6.99	2.91
-10.0	11.02	5.00	10.91	4.95	10.80	4.90	10.69	4.85	10.59	4.80	10.48	4.75
7.0	11.43	3.16	11.31	3.13	11.20	3.10	11.09	3.07	10.98	3.04	10.87	3.01
24.0	14.08	3.92	13.94	3.88	13.80	3.84	13.66	3.80	13.53	3.76	13.39	3.73

AC100HBMDKH/EU + AC100HCADKH/EU

Cooling

TC(Total Capacity), SHC(Sensible Heat Capacity), PI(Power Input)

Outdoor temperature (°C, DB)	Indoor temperature (°C, WB)																	
	14.0			16.0			18.0			19.0			22.0			24.0		
	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI
-15.0	9.76	7.81	2.70	10.00	8.00	2.76	10.25	8.20	2.83	10.50	8.40	2.90	10.75	8.60	2.97	11.01	8.81	3.04
21.0	10.23	8.18	2.79	10.48	8.38	2.86	10.74	8.59	2.93	11.00	8.80	3.00	11.26	9.01	3.07	11.53	9.23	3.15
35.0	9.30	7.44	2.99	9.53	7.62	3.06	9.76	7.81	3.14	10.00	8.00	3.22	10.24	8.19	3.29	10.49	8.39	3.37
46.0	6.90	5.52	3.37	7.07	5.65	3.46	7.24	5.79	3.54	7.42	5.93	3.63	7.60	6.08	3.72	7.78	6.22	3.81
50.0	5.34	2.09	1.33	5.47	2.14	1.36	5.60	2.20	1.40	5.74	4.59	3.00	5.88	4.70	3.72	6.02	4.82	3.81

Heating

TC : Total Capacity PI: Power Input

Outdoor temperature (°C, DB)	Indoor temperature (°C, DB)											
	16.0		18.0		20.0		21.0		22.0		24.0	
	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI
-20.0	7.34	3.06	7.27	3.03	7.20	3.00	7.13	2.97	7.06	2.94	6.99	2.91
-10.0	11.02	5.00	10.91	4.95	10.80	4.90	10.69	4.85	10.59	4.80	10.48	4.75
7.0	11.43	3.16	11.31	3.13	11.20	3.10	11.09	3.07	10.98	3.04	10.87	3.01
24.0	14.08	3.92	13.94	3.88	13.80	3.84	13.66	3.80	13.53	3.76	13.39	3.73

- Capacities are based on following conditions;

- . Cooling mode indoor air temperature (°C, DB/WB) : 20/14, 22/16, 25/18, 27/19, 30/22, 32/24
- . Heating mode outdoor air : 85%RH. However, the condition rated capacity is 7°C DB / 6°C WB.
- . Refrigerant piping length : 5m
- . Level difference : 0m.

3 Capacity table

Duct S

AC120HBMDKH/EU + AC120HCADNH/EU

Cooling

TC(Total Capacity), SHC(Sensible Heat Capacity), PI(Power Input)

Outdoor temperature (°C, DB)	Indoor temperature (°C, WB)																	
	14.0			16.0			18.0			19.0			22.0			24.0		
	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI
-15.0	10.07	8.06	2.92	10.32	8.25	2.99	10.57	8.46	3.06	10.83	8.66	3.14	11.09	8.87	3.22	11.36	9.08	3.29
21.0	12.82	10.26	3.52	13.14	10.51	3.61	13.46	10.77	3.70	13.79	11.03	3.79	14.12	11.30	3.88	14.46	11.57	3.97
35.0	11.16	8.93	4.09	11.43	9.14	4.19	11.71	9.37	4.29	12.00	9.60	4.40	12.29	9.83	4.51	12.58	10.07	4.61
46.0	8.20	6.56	3.64	8.40	6.72	3.73	8.61	6.89	3.83	8.82	7.06	3.92	9.03	7.23	4.01	9.25	7.40	4.11
50.0	5.66	2.09	1.33	5.80	2.14	1.36	5.94	2.20	1.40	6.09	4.87	3.07	6.24	4.99	3.81	6.39	5.11	3.90

Heating

TC : Total Capacity, PI: Power Input

Outdoor temperature (°C, DB)	Indoor temperature (°C, DB)											
	16.0		18.0		20.0		21.0		22.0		24.0	
	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI
-20.0	8.71	4.03	8.63	3.99	8.54	3.95	8.45	3.91	8.37	3.87	8.29	3.83
-10.0	12.82	5.22	12.70	5.17	12.57	5.12	12.44	5.07	12.32	5.02	12.20	4.97
7.0	13.26	3.57	13.13	3.54	13.00	3.50	12.87	3.47	12.74	3.43	12.61	3.40
24.0	14.93	4.24	14.79	4.20	14.64	4.16	14.49	4.12	14.35	4.08	14.21	4.04

AC120HBMDKH/EU + AC120HCADKH/EU

Cooling

TC(Total Capacity), SHC(Sensible Heat Capacity), PI(Power Input)

Outdoor temperature (°C, DB)	Indoor temperature (°C, WB)																	
	14.0			16.0			18.0			19.0			22.0			24.0		
	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI
-15.0	10.07	8.06	2.92	10.32	8.25	2.99	10.57	8.46	3.06	10.83	8.66	3.14	11.09	8.87	3.22	11.36	9.08	3.29
21.0	12.82	10.26	3.52	13.14	10.51	3.61	13.46	10.77	3.70	13.79	11.03	3.79	14.12	11.30	3.88	14.46	11.57	3.97
35.0	11.16	8.93	4.09	11.43	9.14	4.19	11.71	9.37	4.29	12.00	9.60	4.40	12.29	9.83	4.51	12.58	10.07	4.61
46.0	8.20	6.56	3.64	8.40	6.72	3.73	8.61	6.89	3.83	8.82	7.06	3.92	9.03	7.23	4.01	9.25	7.40	4.11
50.0	5.66	2.09	1.33	5.80	2.14	1.36	5.94	2.20	1.40	6.09	4.87	3.07	6.24	4.99	3.81	6.39	5.11	3.90

Heating

TC : Total Capacity PI: Power Input

Outdoor temperature (°C, DB)	Indoor temperature (°C, DB)											
	16.0		18.0		20.0		21.0		22.0		24.0	
	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI
-20.0	8.71	4.03	8.63	3.99	8.54	3.95	8.45	3.91	8.37	3.87	8.29	3.83
-10.0	12.82	5.22	12.70	5.17	12.57	5.12	12.44	5.07	12.32	5.02	12.20	4.97
7.0	13.26	3.57	13.13	3.54	13.00	3.50	12.87	3.47	12.74	3.43	12.61	3.40
24.0	14.93	4.24	14.79	4.20	14.64	4.16	14.49	4.12	14.35	4.08	14.21	4.04

- Capacities are based on following conditions;

- . Cooling mode indoor air temperature (°C, DB/WB) : 20/14, 22/16, 25/18, 27/19, 30/22, 32/24
- . Heating mode outdoor air : 85%RH. However, the condition rated capacity is 7°C DB / 6°C WB.
- . Refrigerant piping length : 5m
- . Level difference : 0m.

3 Capacity table

Duct S

AC140HBMDKH/EU + AC140HCADNH/EU

Cooling

TC(Total Capacity), SHC(Sensible Heat Capacity), PI(Power Input)

Outdoor temperature (°C, DB)	Indoor temperature (°C, WB)																	
	14.0			16.0			18.0			19.0			22.0			24.0		
	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI
-15.0	10.30	8.24	3.30	10.55	8.44	3.38	10.81	8.65	3.46	11.08	8.86	3.55	11.35	9.08	3.64	11.62	9.29	3.72
21.0	14.84	11.87	4.68	15.20	12.16	4.80	15.58	12.46	4.92	15.96	12.77	5.04	16.34	13.07	5.16	16.74	13.39	5.28
35.0	13.02	10.41	4.30	13.34	10.67	4.41	13.66	10.93	4.52	14.00	11.20	4.63	14.34	11.47	4.74	14.68	11.74	4.85
46.0	8.96	7.17	3.93	9.18	7.35	4.03	9.41	7.53	4.13	9.64	7.71	4.23	9.87	7.90	4.33	10.11	8.09	4.44
50.0	6.02	2.09	1.33	6.17	2.14	1.36	6.32	2.20	1.40	6.48	5.18	3.17	6.64	5.31	3.93	6.79	5.44	4.03

Heating

TC : Total Capacity, PI: Power Input

Outdoor temperature (°C, DB)	Indoor temperature (°C, DB)											
	16.0		18.0		20.0		21.0		22.0		24.0	
	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI
-20.0	9.67	4.26	9.57	4.22	9.48	4.18	9.38	4.14	9.29	4.10	9.20	4.06
-10.0	13.87	5.71	13.74	5.66	13.60	5.60	13.46	5.54	13.33	5.49	13.20	5.43
7.0	16.32	4.52	16.16	4.47	16.00	4.43	15.84	4.39	15.68	4.34	15.52	4.30
24.0	19.98	4.60	19.79	4.56	19.59	4.51	19.39	4.46	19.20	4.42	19.01	4.38

AC140HBMDKH/EU + AC140HCADKH/EU

Cooling

TC(Total Capacity), SHC(Sensible Heat Capacity), PI(Power Input)

Outdoor temperature (°C, DB)	Indoor temperature (°C, WB)																	
	14.0			16.0			18.0			19.0			22.0			24.0		
	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI
-15.0	10.30	8.24	3.30	10.55	8.44	3.38	10.81	8.65	3.46	11.08	8.86	3.55	11.35	9.08	3.64	11.62	9.29	3.72
21.0	14.84	11.87	4.68	15.20	12.16	4.80	15.58	12.46	4.92	15.96	12.77	5.04	16.34	13.07	5.16	16.74	13.39	5.28
35.0	13.02	10.41	4.30	13.34	10.67	4.41	13.66	10.93	4.52	14.00	11.20	4.63	14.34	11.47	4.74	14.68	11.74	4.85
46.0	8.96	7.17	3.93	9.18	7.35	4.03	9.41	7.53	4.13	9.64	7.71	4.23	9.87	7.90	4.33	10.11	8.09	4.44
50.0	6.02	2.09	1.33	6.17	2.14	1.36	6.32	2.20	1.40	6.48	5.18	3.17	6.64	5.31	3.93	6.79	5.44	4.03

Heating

TC : Total Capacity PI: Power Input

Outdoor temperature (°C, DB)	Indoor temperature (°C, DB)											
	16.0		18.0		20.0		21.0		22.0		24.0	
	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI
-20.0	9.67	4.26	9.57	4.22	9.48	4.18	9.38	4.14	9.29	4.10	9.20	4.06
-10.0	13.87	5.71	13.74	5.66	13.60	5.60	13.46	5.54	13.33	5.49	13.20	5.43
7.0	16.32	4.52	16.16	4.47	16.00	4.43	15.84	4.39	15.68	4.34	15.52	4.30
24.0	19.98	4.60	19.79	4.56	19.59	4.51	19.39	4.46	19.20	4.42	19.01	4.38

- Capacities are based on following conditions;

- . Cooling mode indoor air temperature (°C, DB/WB) : 20/14, 22/16, 25/18, 27/19, 30/22, 32/24
- . Heating mode outdoor air : 85%RH. However, the condition rated capacity is 7°C DB / 6°C WB.
- . Refrigerant piping length : 5m
- . Level difference : 0m.

4 Dimensional drawing

Global Duct

AC026HBLDKH/EU, AC035HBLDKH/EU

Units : mm / inches

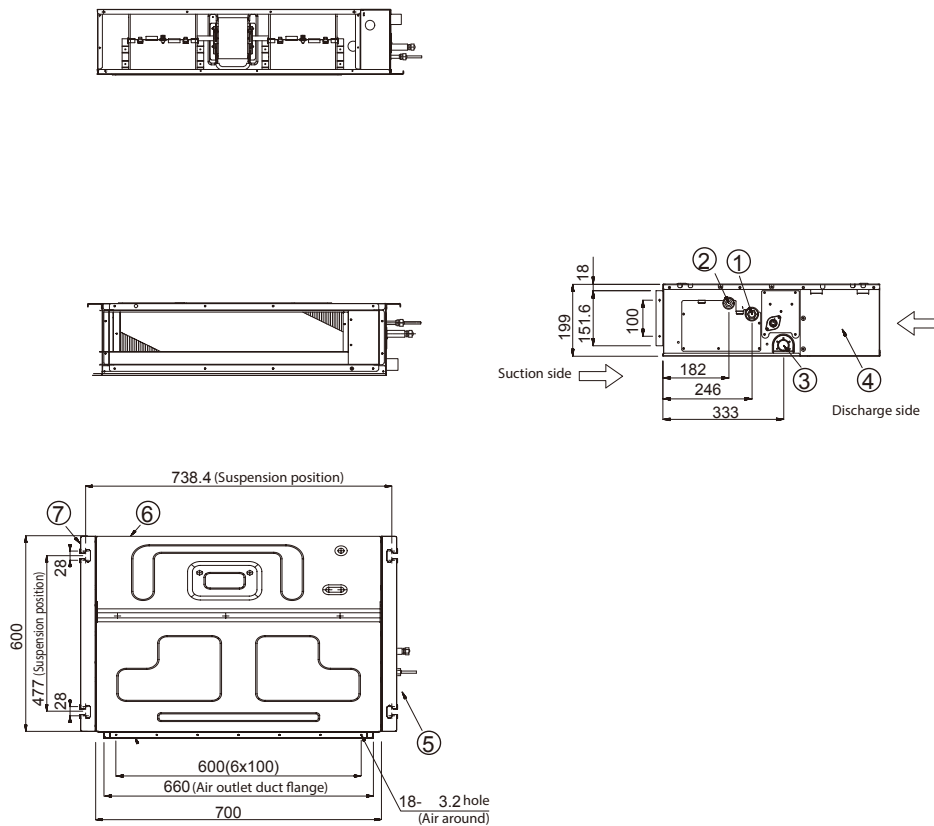


Table of descriptions

1	Refrigerant gas pipe	7	Hook
2	Refrigerant liquid pipe	8	
3	Condensate drain	9	
4	Power & Comm. wiring conduits	10	
5	Refrigerant pipe conduits	11	
6	Return air flange	12	

4 Dimensional drawing

Duct S

AC035HBMDKH/EU, AC052HBMDKH/EU, AC060HBMDKH/EU, AC071HBMDKH/EU

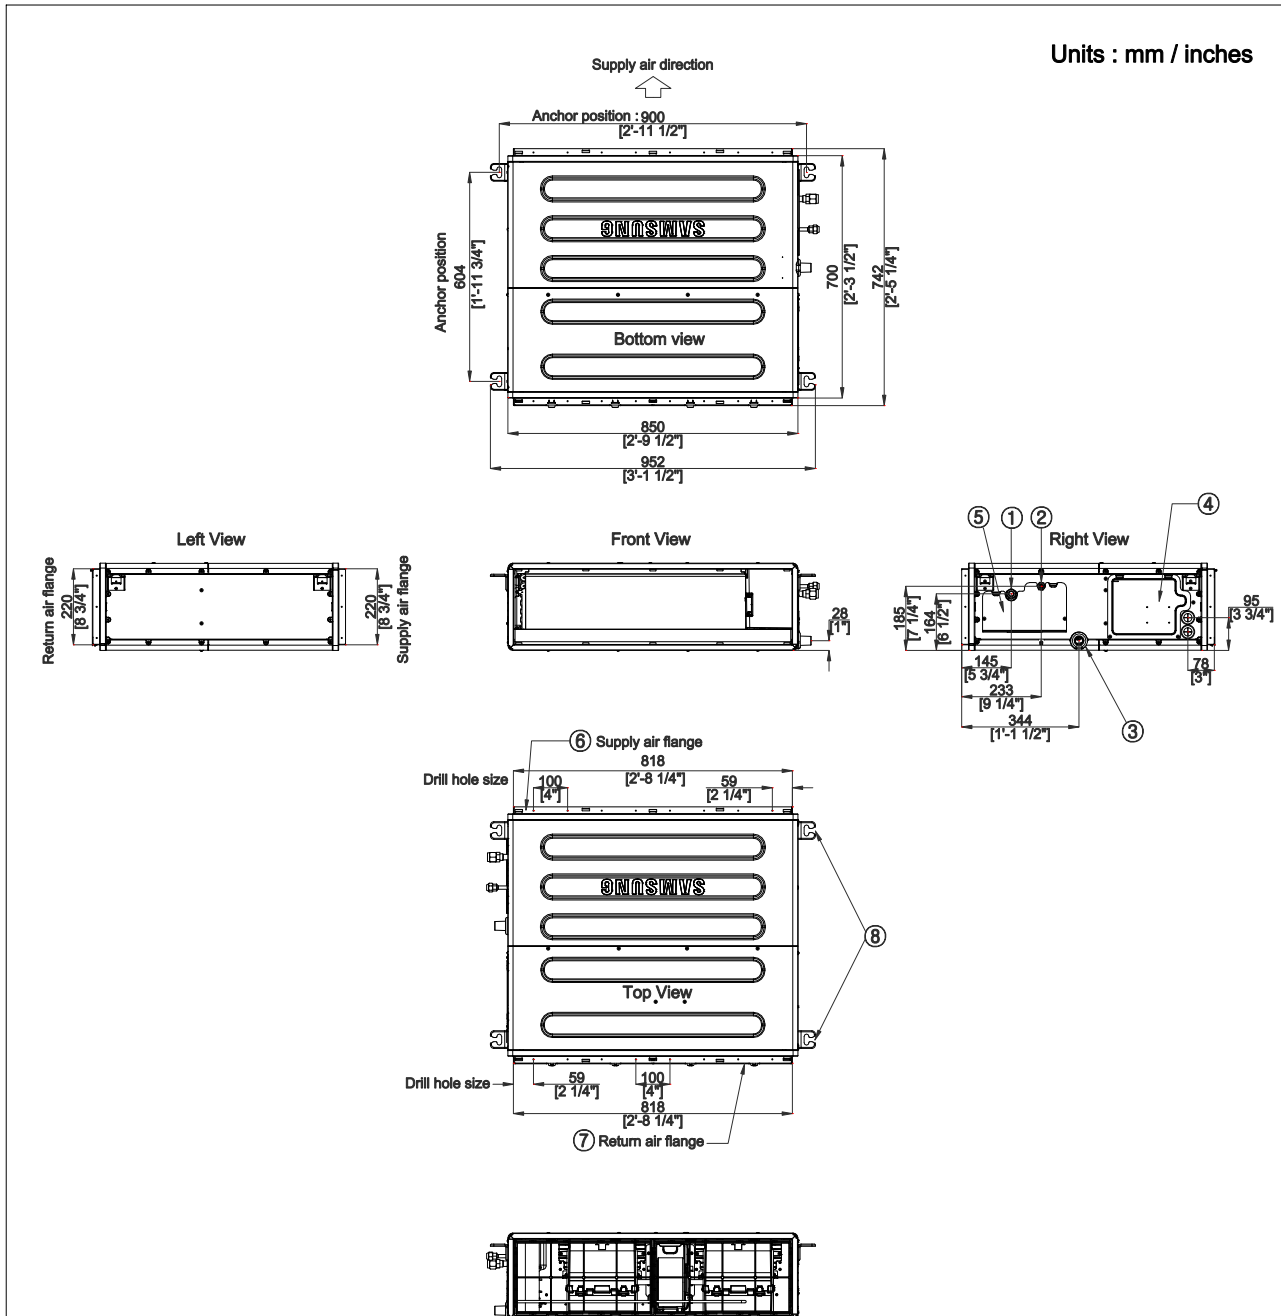


Table of descriptions

1	Refrigerant gas pipe	7	Return air flange
2	Refrigerant liquid pipe	8	Hook
3	Condensate drain	9	
4	Power & Comm. wiring conduits	10	
5	Refrigerant pipe conduits	11	
6	Supply air flange	12	

4 Dimensional drawing

Duct S

AC052HBLDKH/EU, AC071HBLDKH/EU

Units : mm / inches

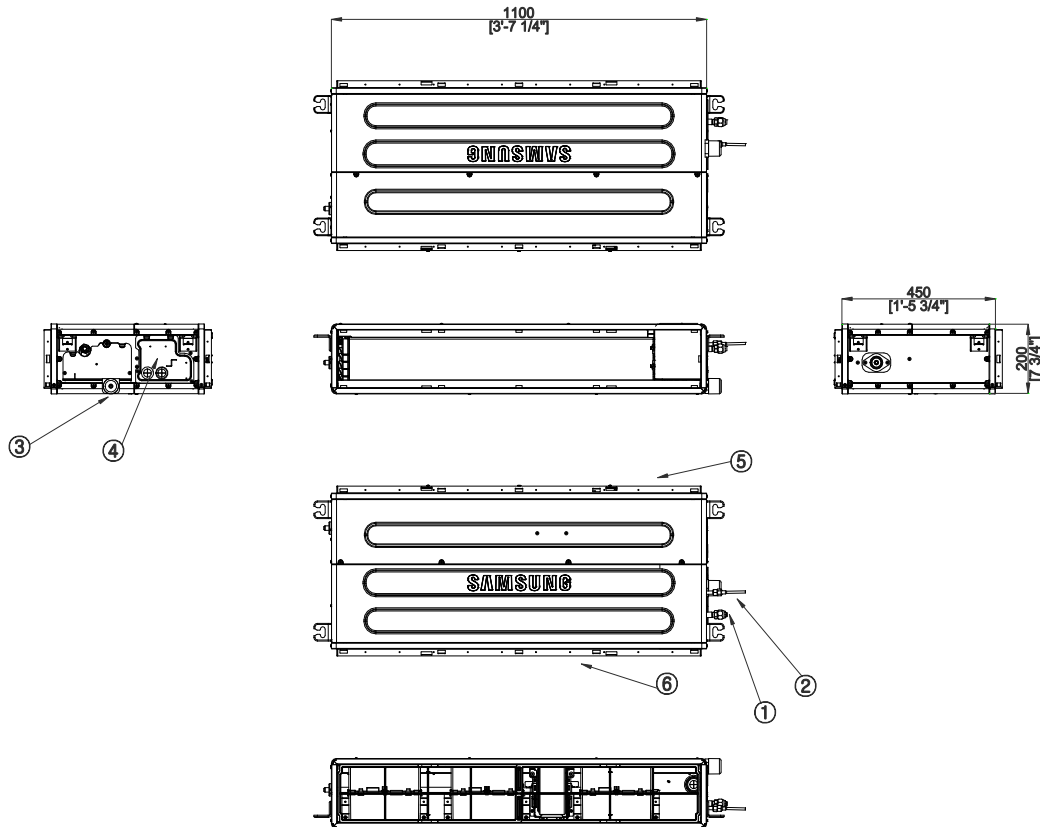


Table of descriptions

1	Refrigerant gas pipe	7	
2	Refrigerant liquid pipe	8	
3	Condensate drain	9	
4	Power & Comm. wiring conduits	10	
5	Air Inlet grille	11	
6	Air Outlet grille	12	

4 Dimensional drawing

Duct S

AC090HBMDKH/EU, AC100HBMDKH/EU

Units : mm / inches

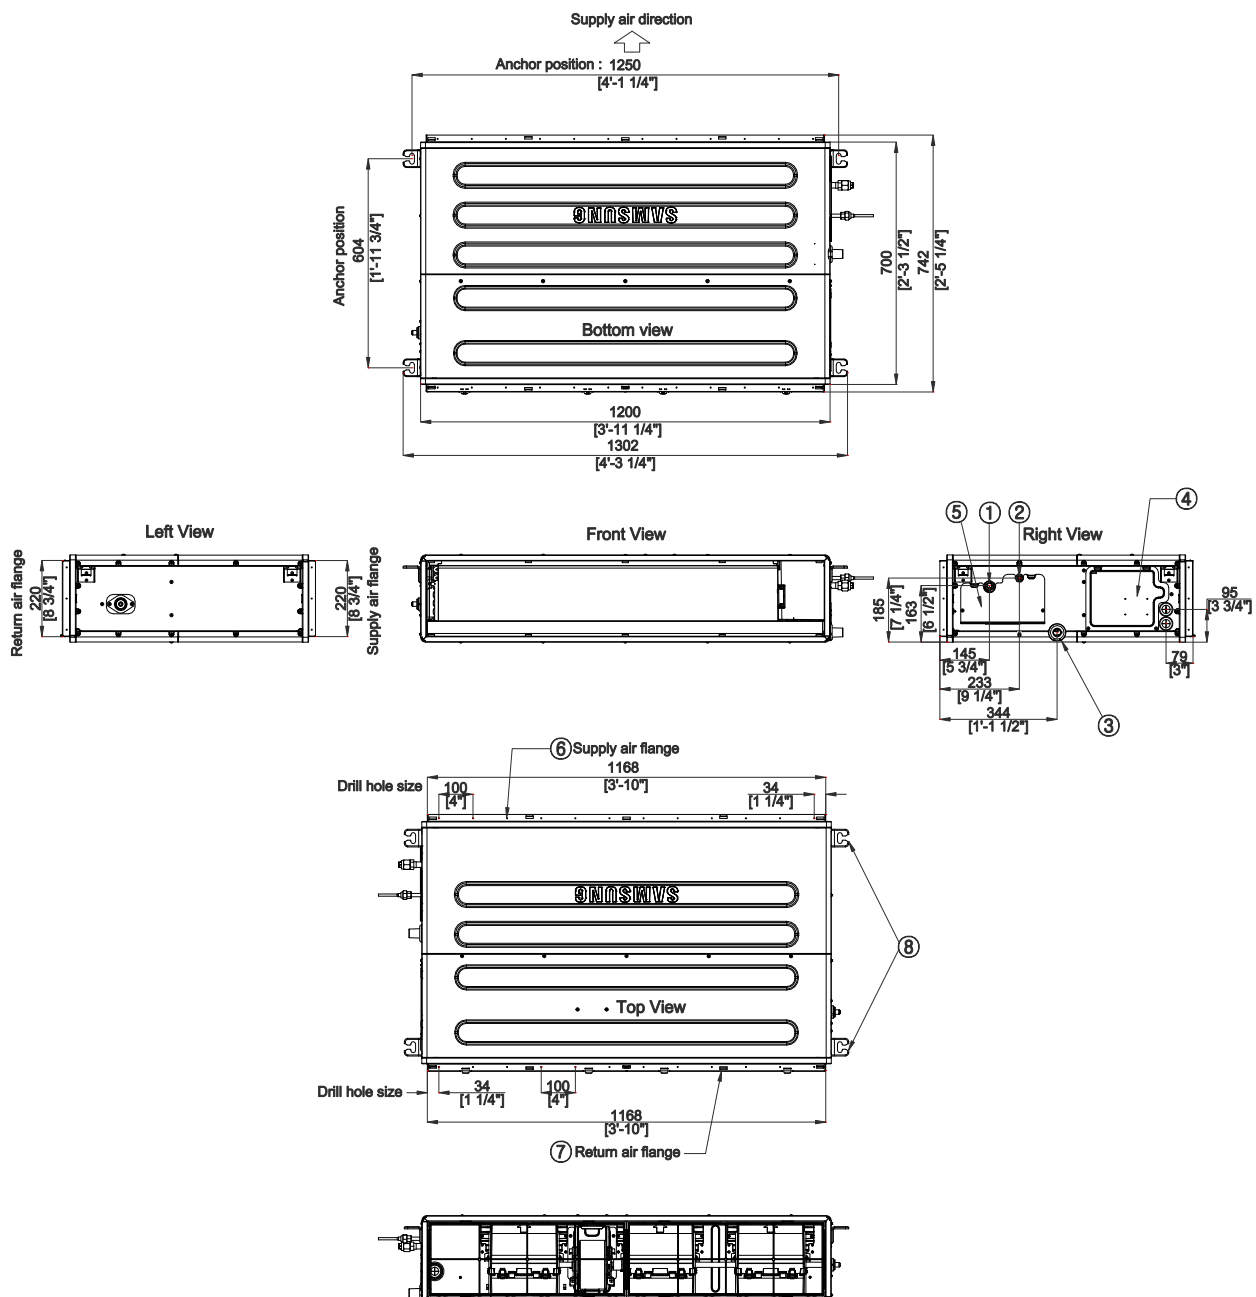


Table of descriptions

1	Refrigerant gas pipe	7	Return air flange
2	Refrigerant liquid pipe	8	Hook
3	Condensate drain	9	
4	Power & Comm. wiring conduits	10	
5	Refrigerant pipe conduits	11	
6	Supply air flange	12	

4 Dimensional drawing

Duct S

AC120HBMDKH/EU, AC140HBMDKH/EU

Units : mm / inches

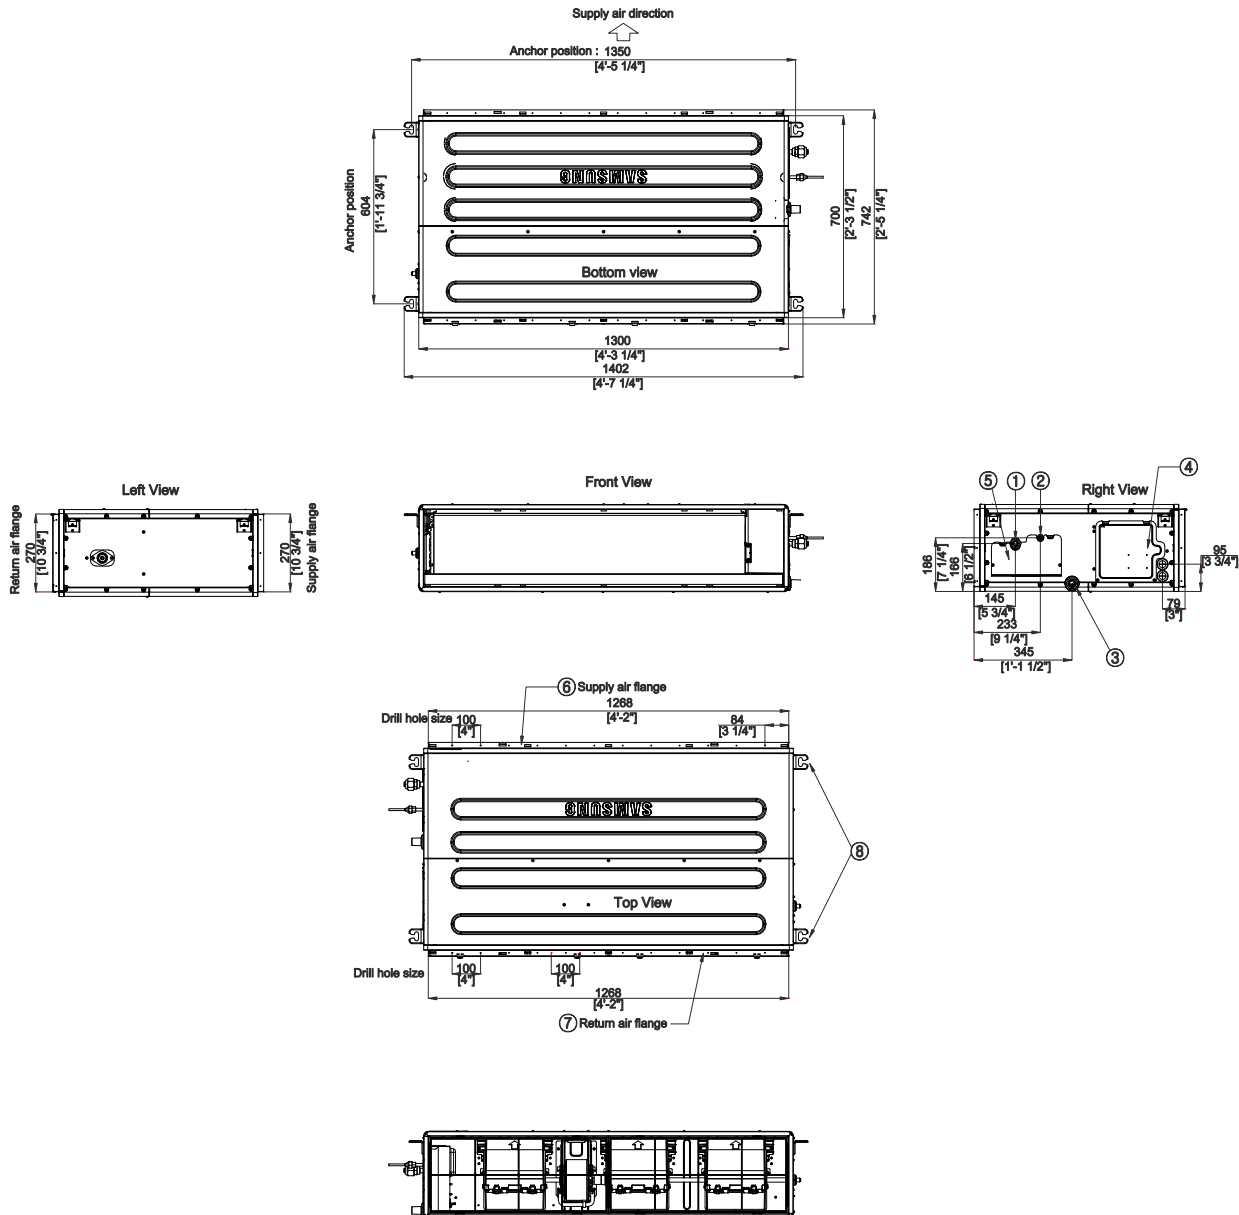



Table of descriptions

1	Refrigerant gas pipe	7	Return air flange
2	Refrigerant liquid pipe	8	Hook
3	Condensate drain	9	
4	Power & Comm. wiring conduits	10	
5	Refrigerant pipe conduits	11	
6	Supply air flange	12	

5 Electrical wiring diagram

Duct S


AC026HBLDKH/EU, AC035HBLDKH/EU, AC052HBLDKH/EU, AC071HBLDKH/EU

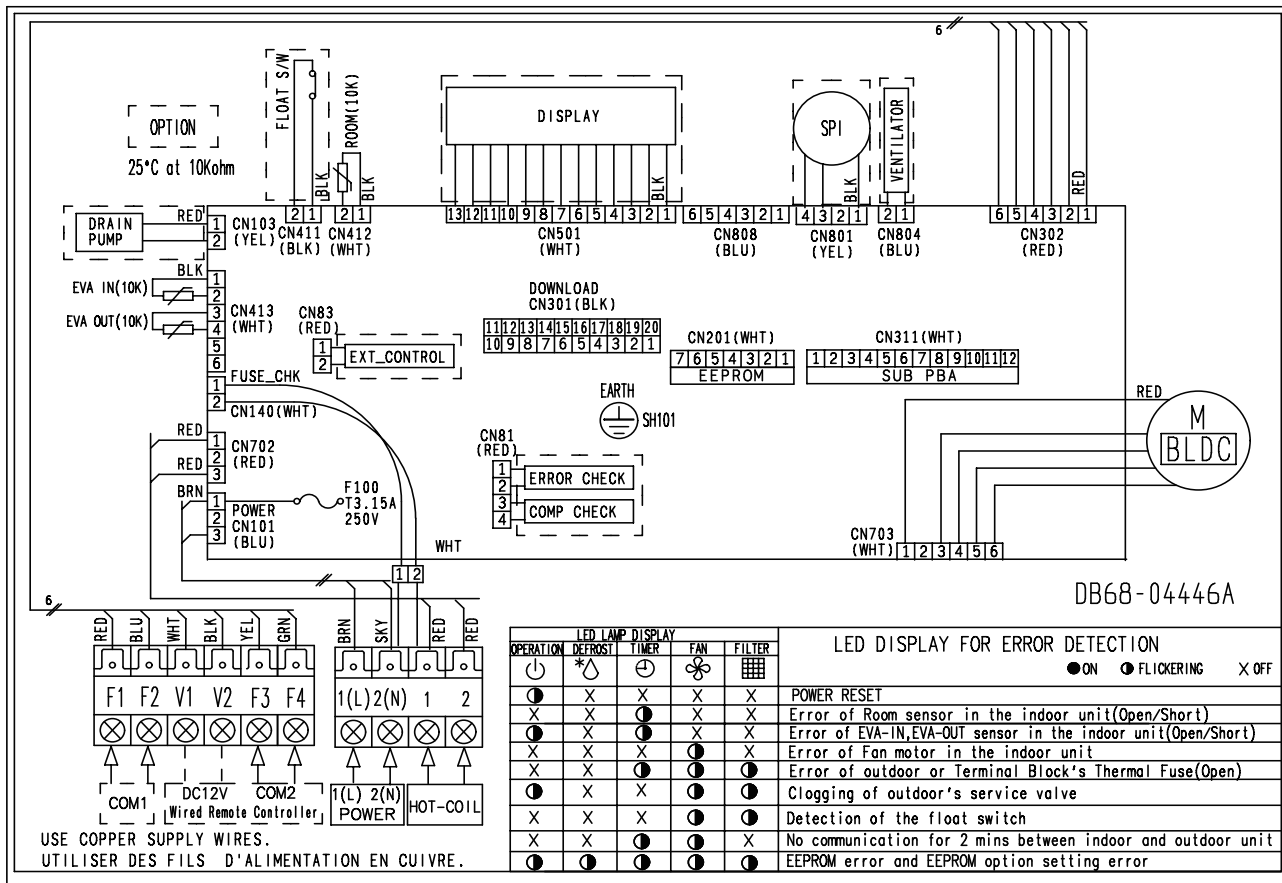

5 Electrical wiring diagram


Duct S

AC035HBMDKH/EU, AC052HBMDKH/EU, AC060HBMDKH/EU, AC071HBMDKH/EU, AC090HBMDKH/EU, AC100HBMDKH/EU, AC120HBMDKH/EU
AC140HBMDKH/EU

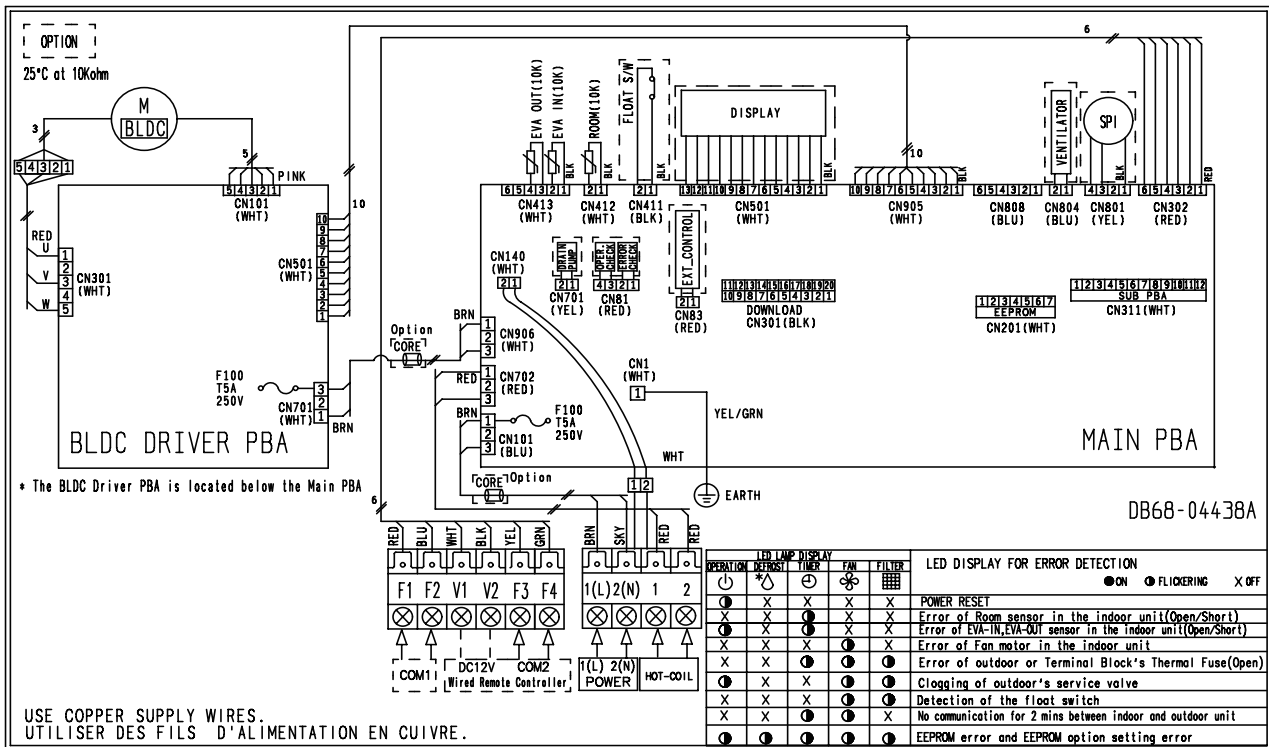

6 Sound pressure level

Duct S

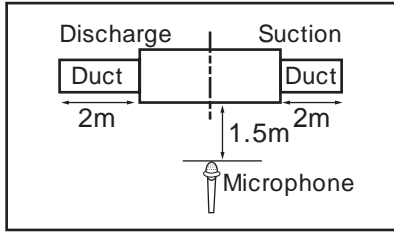

Unit: dB(A)


Model	High	Low
AC026HBLDKH/EU (ODU : AC026HCADKH/EU)	40.0	34.0
AC035HBLDKH/EU (ODU : AC035HCADKH/EU)	40.0	34.0
AC035HBMDKH/EU (ODU : AC035HCADKH/EU)	32.0	26.0
AC052HBLDKH/EU (ODU : AC052HCADKH/EU)	33.0	27.0

Note


- These operation values were obtained in an anechoic room. Sound pressure level will vary depending on a range of factors such as the construction of the particular room where the equipment is installed.
- Operation sound level may differ depending on operation and ambient conditions.

NC curve


1) AC026HBLDKH/EU (ODU : AC026HCADKH/EU)

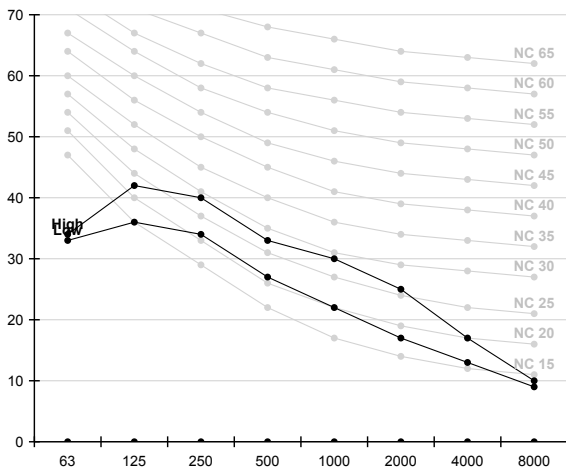


2) AC035HBLDKH/EU (ODU : AC035HCADKH/EU)

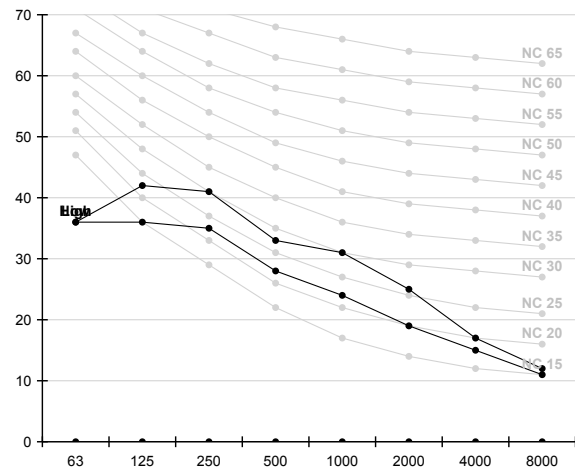

3) AC035HBMDKH/EU (ODU : AC035HCADKH/EU)

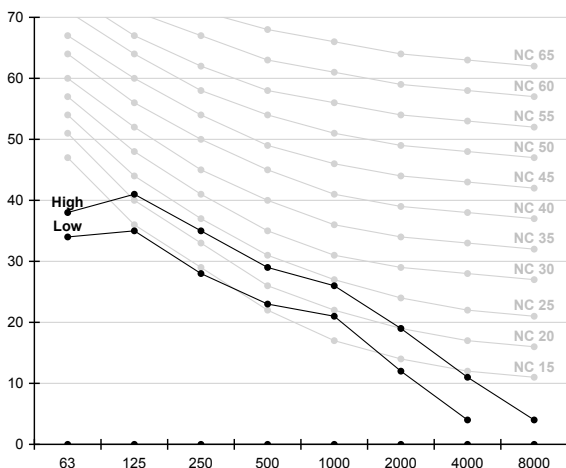


4) AC052HBLDKH/EU (ODU : AC052HCADKH/EU)

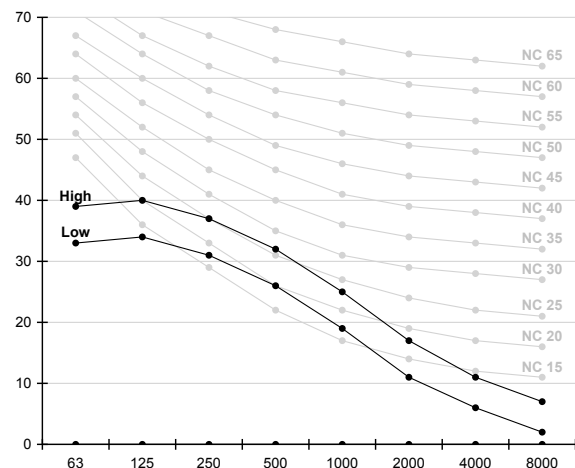

6 Sound pressure level

Duct S

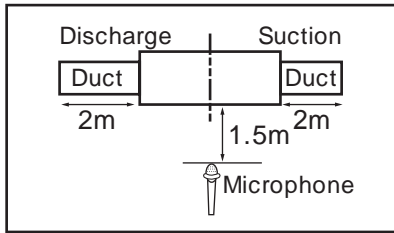

Unit: dB(A)


Model	High	Low
AC052HBMDKH/EU (ODU : AC052HCADKH/EU)	33.0	27.0
AC060HBMDKH/EU (ODU : AC060HCADKH/EU)	37.0	29.0
AC071HBLDKH/EU (ODU : AC071HCADKH/EU)	37.0	31.0
AC071HBMDKH/EU (ODU : AC071HCADKH/EU)	37.0	29.0

Note


- These operation values were obtained in an anechoic room. Sound pressure level will vary depending on a range of factors such as the construction of the particular room where the equipment is installed.
- Operation sound level may differ depending on operation and ambient conditions.

NC curve


1) AC052HBMDKH/EU (ODU : AC052HCADKH/EU)

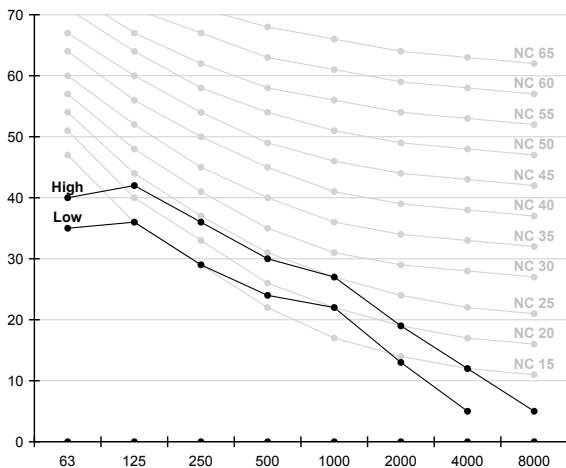


2) AC060HBMDKH/EU (ODU : AC060HCADKH/EU)

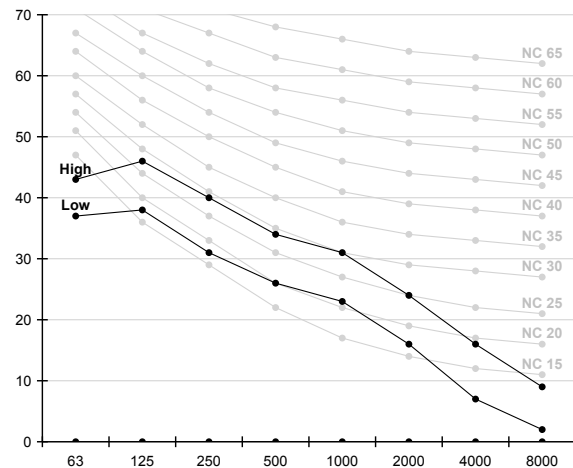

3) AC071HBLDKH/EU (ODU : AC071HCADKH/EU)

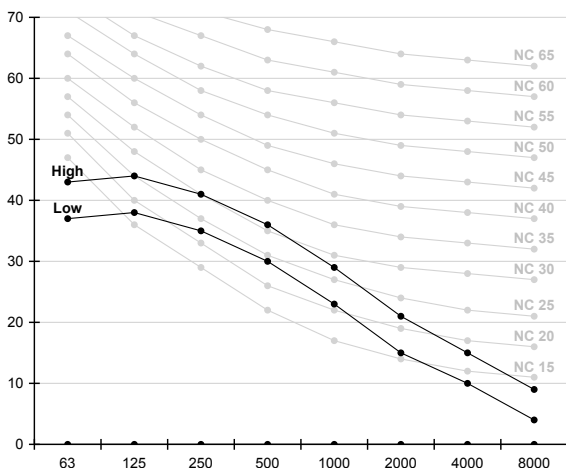


4) AC071HBMDKH/EU (ODU : AC071HCADKH/EU)

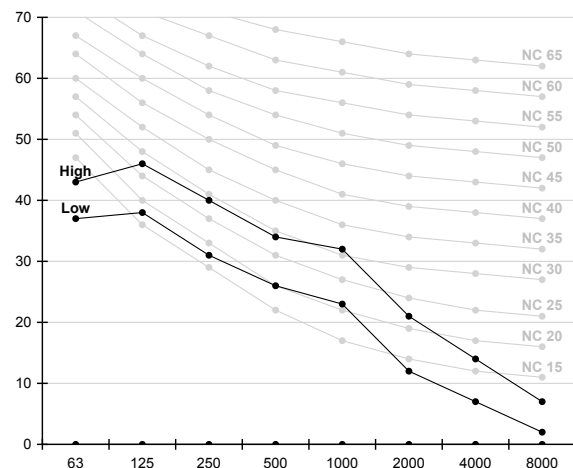

6 Sound pressure level

Duct S

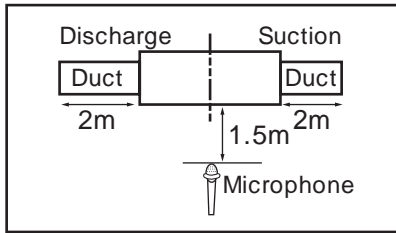

Unit: dB(A)


Model	High	Low
AC090HBMDKH/EU (ODU : AC090HCADKH/EU)	38.0	32.0
AC090HBMDKH/EU (ODU : AC090HCADNH/EU)	38.0	32.0
AC100HBMDKH/EU (ODU : AC100HCADNH/EU)	38.0	32.0
AC100HBMDKH/EU (ODU : AC100HCADKH/EU)	38.0	32.0

Note


- These operation values were obtained in an anechoic room. Sound pressure level will vary depending on a range of factors such as the construction of the particular room where the equipment is installed.
- Operation sound level may differ depending on operation and ambient conditions.

NC curve


1) AC090HBMDKH/EU (ODU : AC090HCADKH/EU)

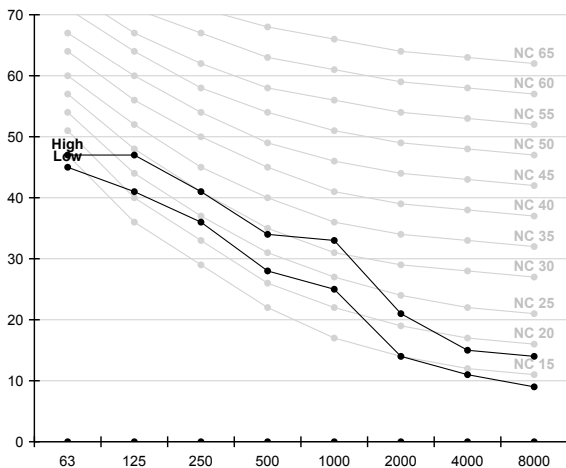


2) AC090HBMDKH/EU (ODU : AC090HCADNH/EU)

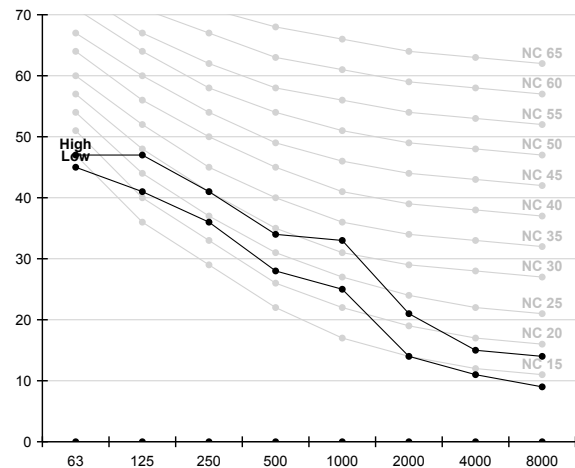

3) AC100HBMDKH/EU (ODU : AC100HCADNH/EU)

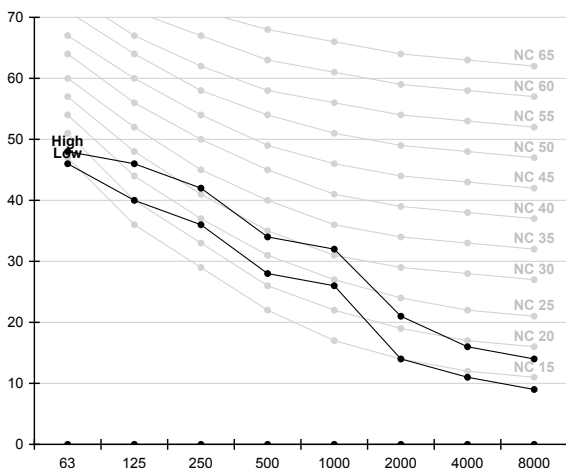


4) AC100HBMDKH/EU (ODU : AC100HCADKH/EU)

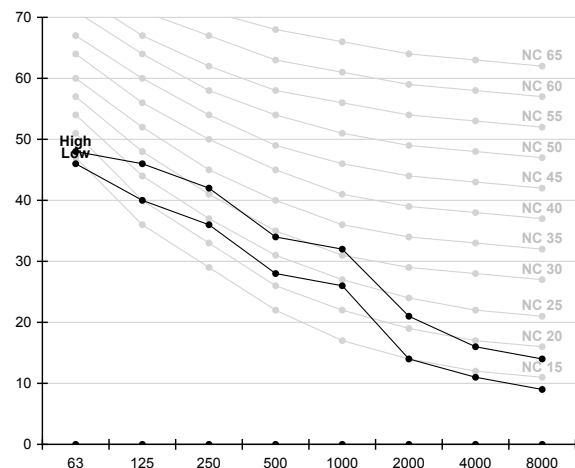

6 Sound pressure level

Duct S

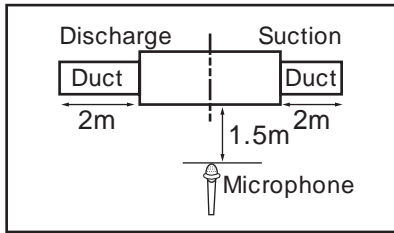

Unit: dB(A)


Model	High	Low
AC120HBMDKH/EU (ODU : AC120HCADNH/EU)	39.0	33.0
AC120HBMDKH/EU (ODU : AC120HCADKH/EU)	39.0	33.0
AC140HBMDKH/EU (ODU : AC140HCADNH/EU)	40.0	33.0
AC140HBMDKH/EU (ODU : AC140HCADKH/EU)	40.0	33.0

Note


- These operation values were obtained in an anechoic room. Sound pressure level will vary depending on a range of factors such as the construction of the particular room where the equipment is installed.
- Operation sound level may differ depending on operation and ambient conditions.

NC curve


1) AC120HBMDKH/EU (ODU : AC120HCADNH/EU)

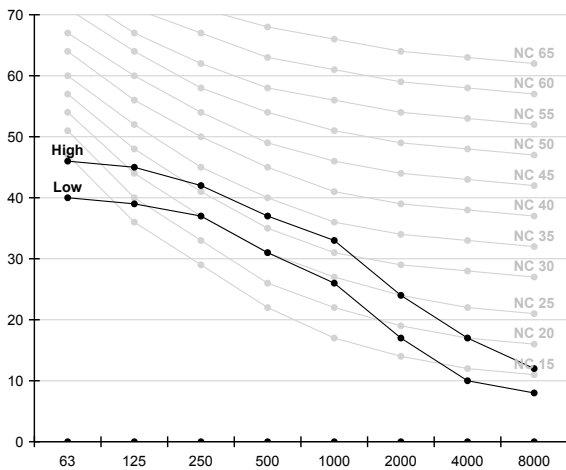


2) AC120HBMDKH/EU (ODU : AC120HCADKH/EU)

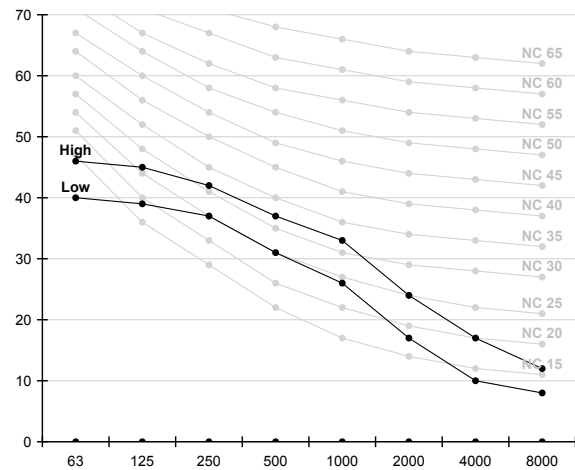

3) AC140HBMDKH/EU (ODU : AC140HCADNH/EU)

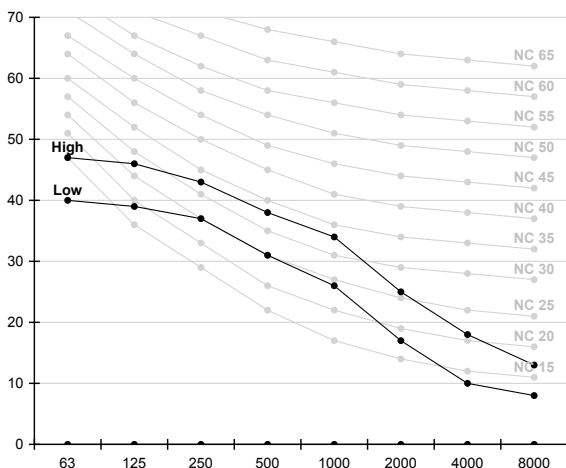

4) AC140HBMDKH/EU (ODU : AC140HCADKH/EU)

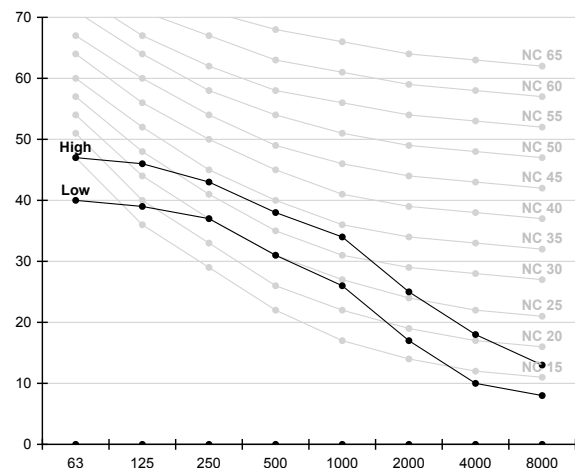

7 Sound power level

Duct S


Note

- dBA = A-Weighted sound power level.
- Reference power : 1pW
- Measured according to ISO 3741.


Unit: dB(A)

Model	Power
AC026HBLDKH/EU (ODU : AC026HCADKH/EU)	53.0
AC035HBLDKH/EU (ODU : AC035HCADKH/EU)	53.0
AC035HBMDKH/EU (ODU : AC035HCADKH/EU)	52.0
AC052HBLDKH/EU (ODU : AC052HCADKH/EU)	55.0


1) AC026HBLDKH/EU (ODU : AC026HCADKH/EU)

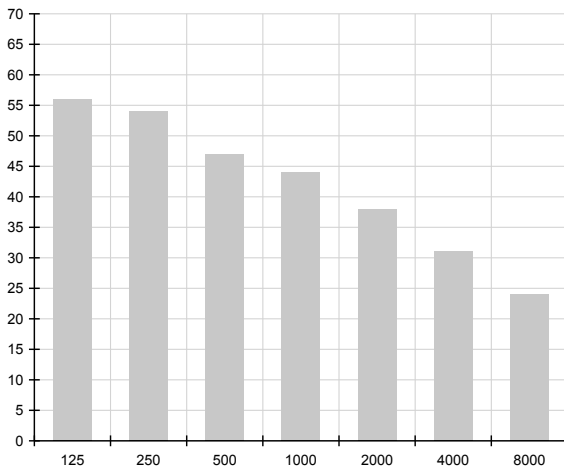


2) AC035HBLDKH/EU (ODU : AC035HCADKH/EU)

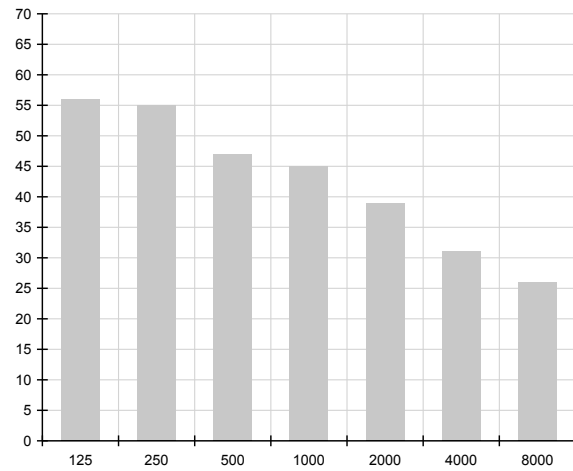

3) AC035HBMDKH/EU (ODU : AC035HCADKH/EU)

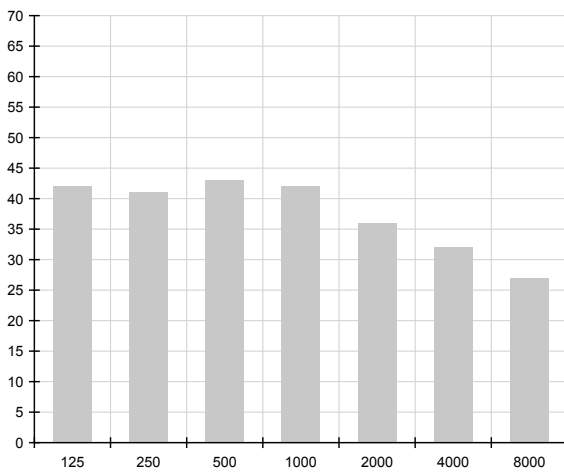

4) AC052HBLDKH/EU (ODU : AC052HCADKH/EU)

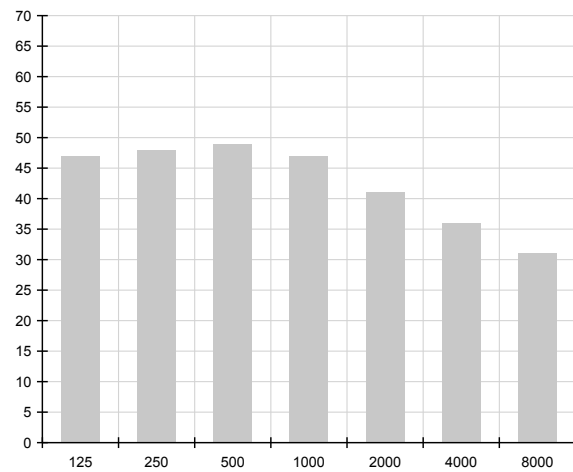

7 Sound power level

Duct S


Note

- dBA = A-Weighted sound power level.
- Reference power : 1pW
- Measured according to ISO 3741.


Unit: dB(A)

Model	Power
AC052HBMDKH/EU (ODU : AC052HCADKH/EU)	53.0
AC060HBMDKH/EU (ODU : AC060HCADKH/EU)	57.0
AC071HBLDKH/EU (ODU : AC071HCADKH/EU)	59.0
AC071HBMDKH/EU (ODU : AC071HCADKH/EU)	57.0


1) AC052HBMDKH/EU (ODU : AC052HCADKH/EU)

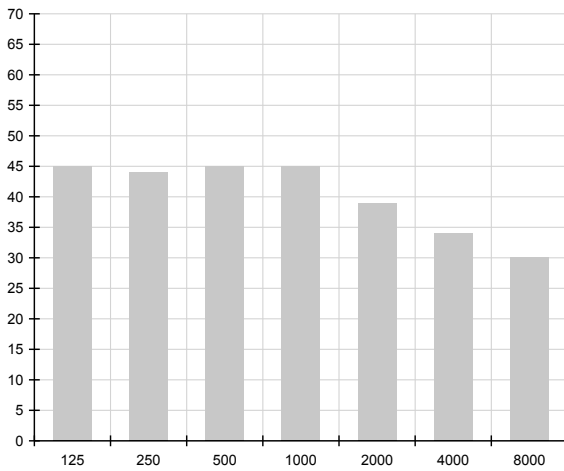


2) AC060HBMDKH/EU (ODU : AC060HCADKH/EU)

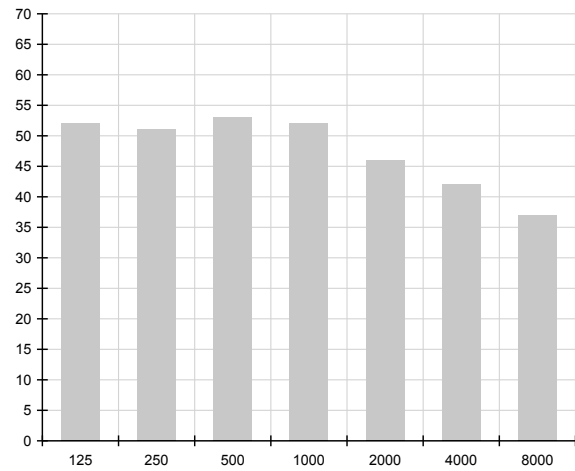

3) AC071HBLDKH/EU (ODU : AC071HCADKH/EU)

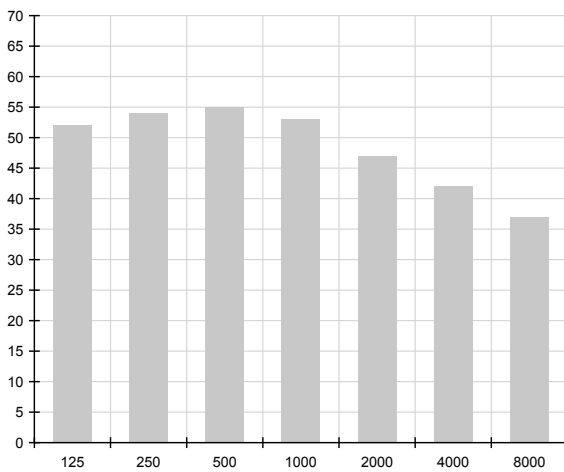

4) AC071HBMDKH/EU (ODU : AC071HCADKH/EU)

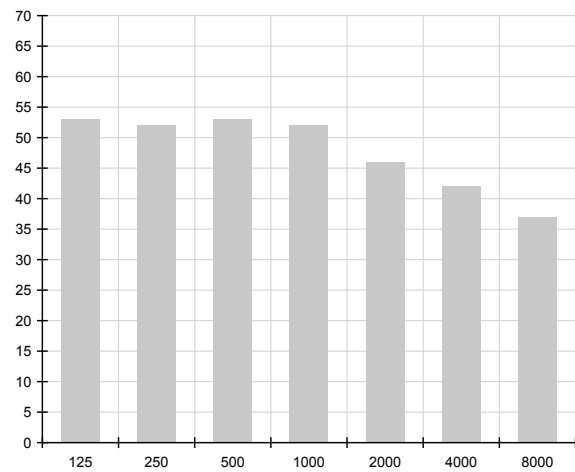

7 Sound power level

Duct S


Note

- dBA = A-Weighted sound power level.
- Reference power : 1pW
- Measured according to ISO 3741.


Unit: dB(A)

Model	Power
AC090HBMDKH/EU (ODU : AC090HCADKH/EU)	61.0
AC090HBMDKH/EU (ODU : AC090HCADNH/EU)	61.0
AC100HBMDKH/EU (ODU : AC100HCADNH/EU)	61.0
AC100HBMDKH/EU (ODU : AC100HCADKH/EU)	61.0


1) AC090HBMDKH/EU (ODU : AC090HCADKH/EU)

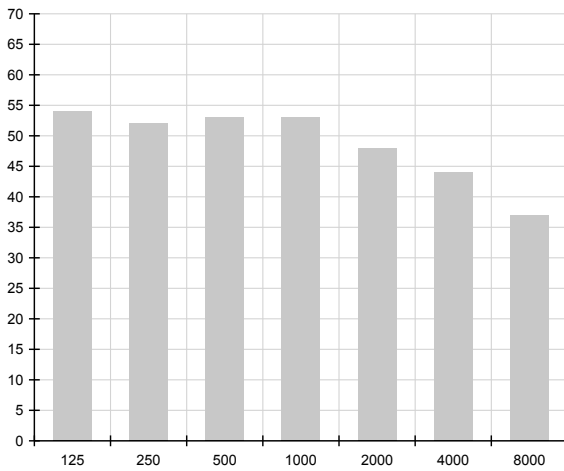


2) AC090HBMDKH/EU (ODU : AC090HCADNH/EU)

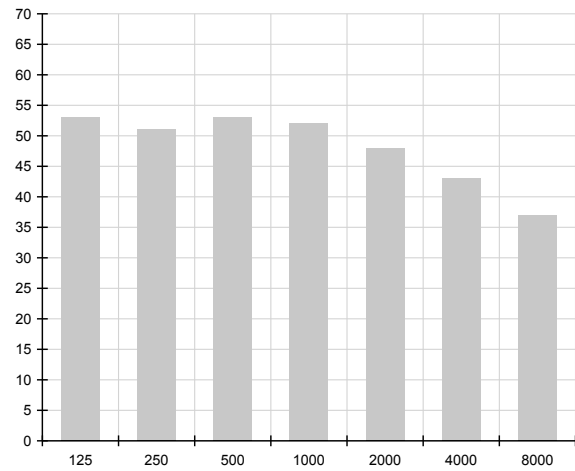

3) AC100HBMDKH/EU (ODU : AC100HCADNH/EU)

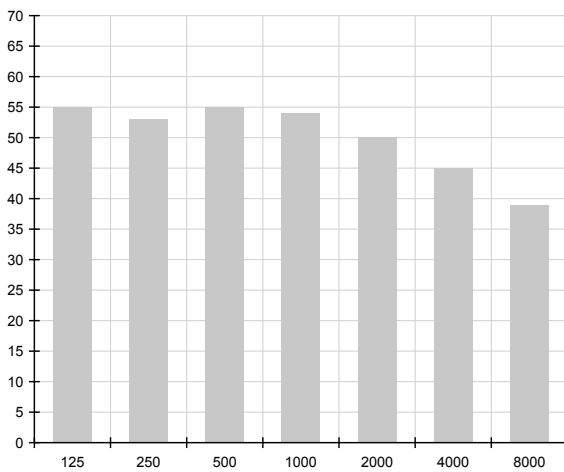

4) AC100HBMDKH/EU (ODU : AC100HCADKH/EU)

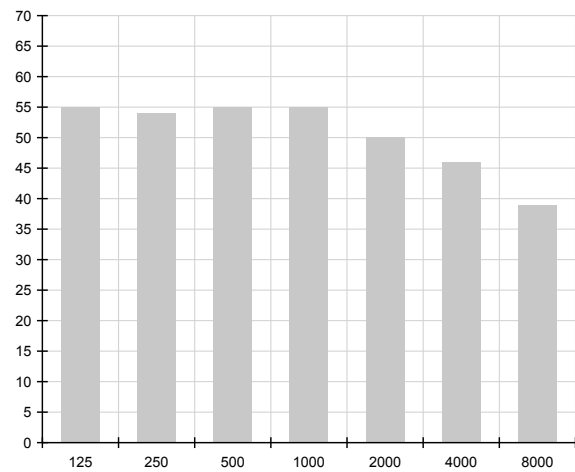

7 Sound power level

Duct S


Note

- dBA = A-Weighted sound power level.
- Reference power : 1pW
- Measured according to ISO 3741.


Unit: dB(A)

Model	Power
AC120HBMDKH/EU (ODU : AC120HCADNH/EU)	65.0
AC120HBMDKH/EU (ODU : AC120HCADKH/EU)	65.0
AC140HBMDKH/EU (ODU : AC140HCADNH/EU)	66.0
AC140HBMDKH/EU (ODU : AC140HCADKH/EU)	66.0


1) AC120HBMDKH/EU (ODU : AC120HCADNH/EU)

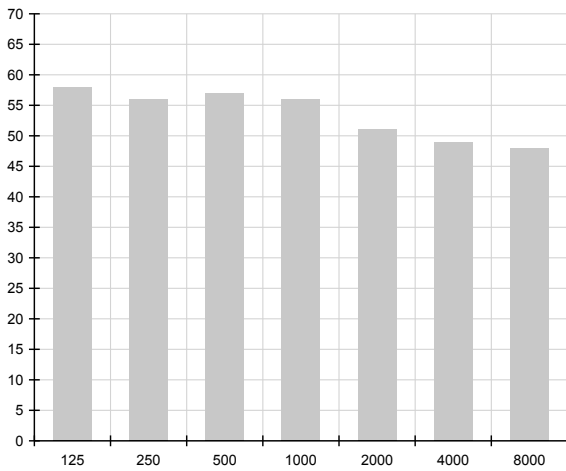


2) AC120HBMDKH/EU (ODU : AC120HCADKH/EU)

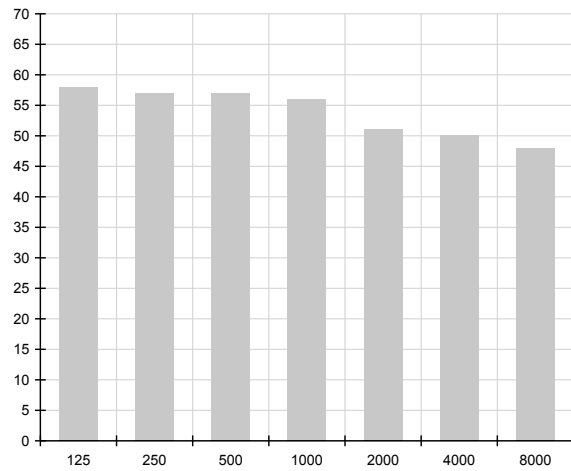

3) AC140HBMDKH/EU (ODU : AC140HCADNH/EU)

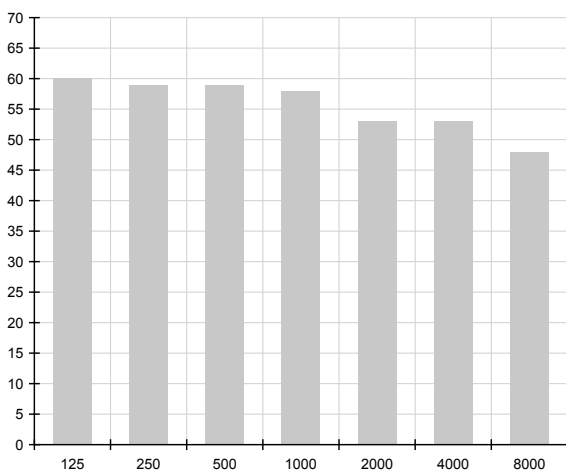


4) AC140HBMDKH/EU (ODU : AC140HCADKH/EU)

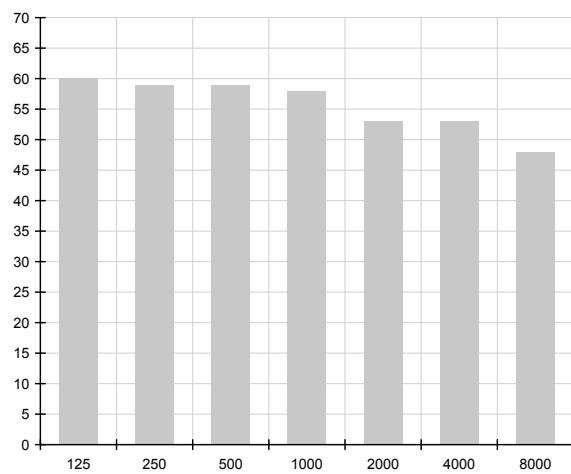

8 Recommended operation range


Duct S

1) AC026HBLDKH/EU (ODU : AC026HCADKH/EU)

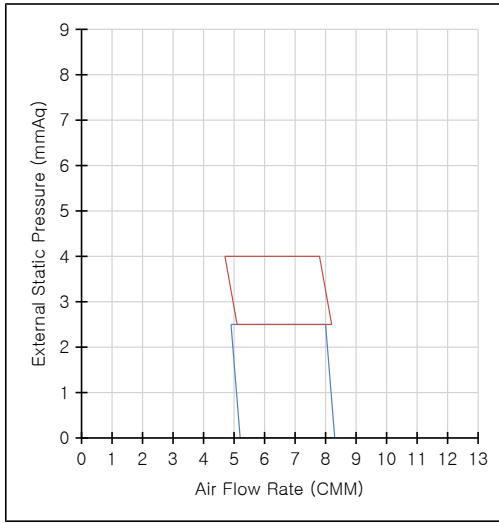


External Static Pressure (mmAq)	Option Code
0-2.5	01C06C-1C9914-271A21-370000
2.5-4	01C06C-1C9969-271A21-370000

2) AC035HBLDKH/EU (ODU : AC035HCADKH/EU)

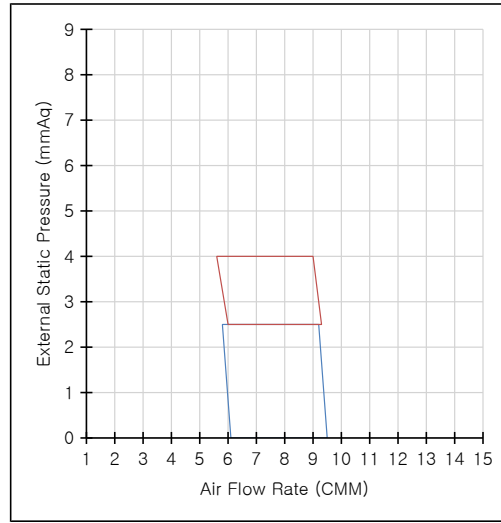


External Static Pressure (mmAq)	Option Code
0-2.5	01C06C-1C7936-272328-370000
2.5-4	01C06C-1C79AD-272328-370000

3) AC035HBMDKH/EU (ODU : AC035HCADKH/EU)

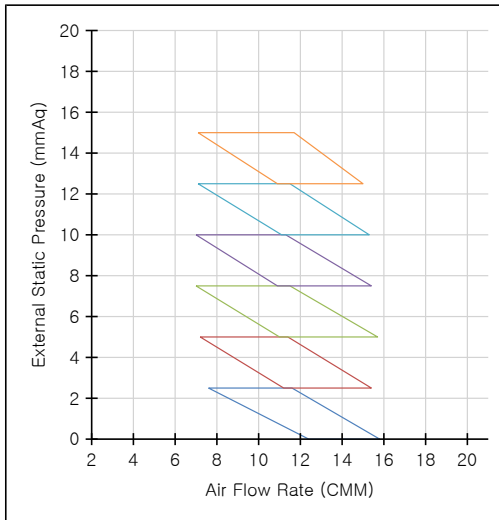

External Static Pressure (mmAq)	Option Code
0-2.5	01B06C-1C5084-272328-374000
2.5-5	01B06C-1C50EB-272328-374000
5-7.5	01B06C-1C5552-272328-374000
7.5-10	01B06C-1C55CA-272328-374000
10-12.5	01B06C-1C5A30-272328-374000
12.5-15	01B06C-1C5A85-272328-374000

4) AC052HBLDKH/EU (ODU : AC052HCADKH/EU)

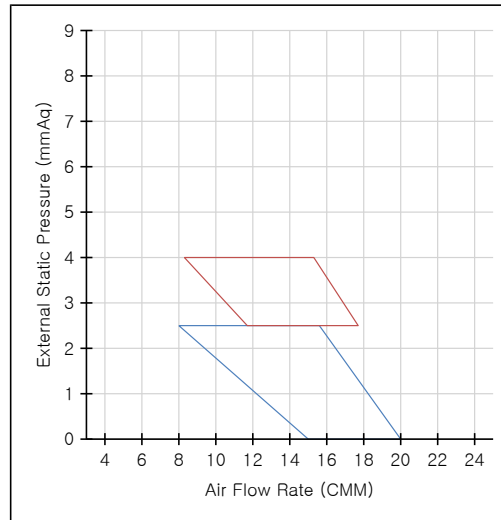

External Static Pressure (mmAq)	Option Code
0-3	01C06C-1C5925-27323C-370000
3-4	01C06C-1C596B-27323C-370000


Note

- Adjust option code according to the actual installation condition (external static pressure).
- The graphs display the available external static pressure range of installed indoor units. Therefore, they do not reflect the actual change of external static pressure and airflow rate according to adjusted airflow (High-Mid-Low) of installed indoor units.

8 Recommended operation range


Duct S

5) AC052HBMDKH/EU (ODU : AC052HCADKH/EU)

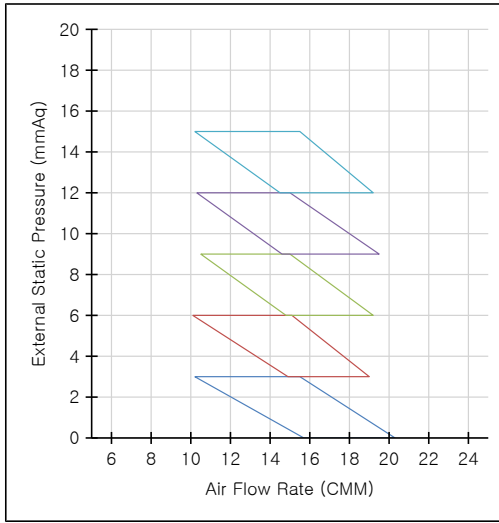


External Static Pressure (mmAq)	Option Code
0-3	01B06C-1C50E6-27343C-373000
3-6	01B06C-1C544D-27343C-373000
6-9	01B06C-1C55A4-27343C-373000
9-12	01B06C-1C591A-27343C-373000
12-15	01B06C-1C5A70-27343C-373000

6) AC060HBMDKH/EU (ODU : AC060HCADKH/EU)

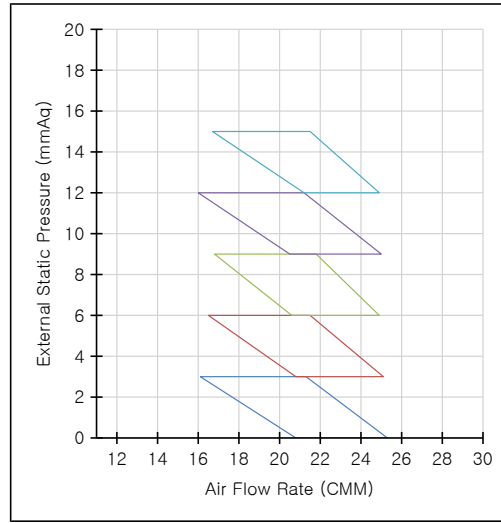


External Static Pressure (mmAq)	Option Code
0-3	01B06C-1C547F-273C46-372005
3-6	01B06C-1C55D5-273C46-372005
6-9	01B06C-1C592B-273C46-372005
9-12	01B06C-1C5A71-273C46-372005
12-15	01B06C-1C5AC8-273C46-372005

7) AC071HBLDKH/EU (ODU : AC071HCADKH/EU)

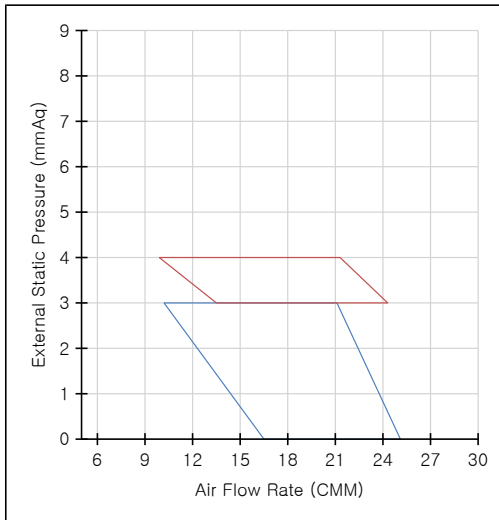

External Static Pressure (mmAq)	Option Code
0-3	01C06C-1C59E8-274750-370005
3-4	01C06C-1C5D2D-274750-370005

8) AC071HBMDKH/EU (ODU : AC071HCADKH/EU)

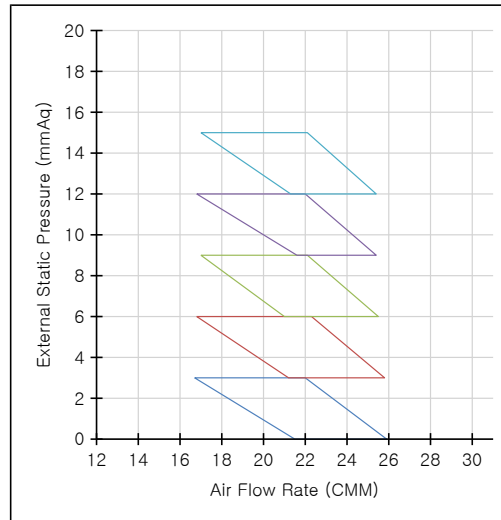

External Static Pressure (mmAq)	Option Code
0-3	01B06C-1C5580-274750-371005
3-6	01B06C-1C55E6-274750-371005
6-9	01B06C-1C593C-274750-371005
9-12	01B06C-1C5A82-274750-371005
12-15	01B06C-1C5AD9-274750-371005


Note

- Adjust option code according to the actual installation condition (external static pressure).
- The graphs display the available external static pressure range of installed indoor units. Therefore, they do not reflect the actual change of external static pressure and airflow rate according to adjusted airflow (High-Mid-Low) of installed indoor units.

8 Recommended operation range


Duct S

9) AC090HBMDKH/EU (ODU : AC090HCADKH/EU)

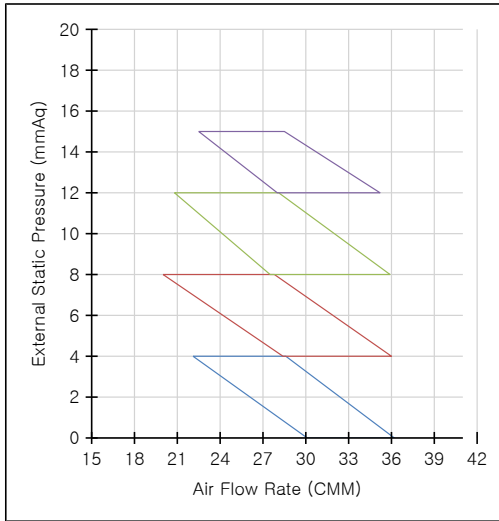


External Static Pressure (mmAq)	Option Code
0-4	01B06C-1C546F-275A64-372020
4-8	01B06C-1C55E8-275A64-372020
8-12	01B06C-1C5A61-275A64-372020
12-15	01B06C-1C5AC8-275A64-372020

10) AC090HBMDKH/EU (ODU : AC090HCADNH/EU)

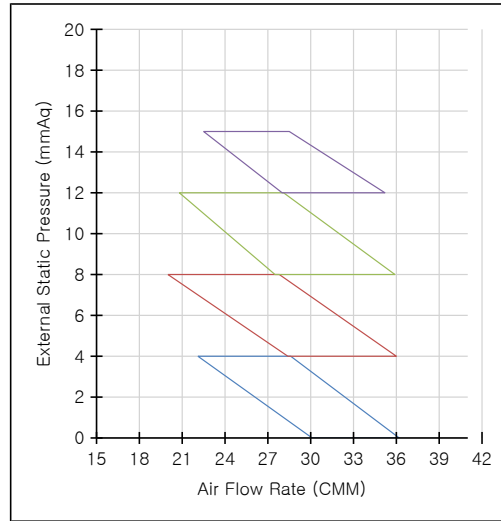


External Static Pressure (mmAq)	Option Code
0-4	01B06C-1C546F-275A64-372020
4-8	01B06C-1C55E8-275A64-372020
8-12	01B06C-1C5A61-275A64-372020
12-15	01B06C-1C5AC8-275A64-372020

11) AC100HBMDKH/EU (ODU : AC100HCADNH/EU)

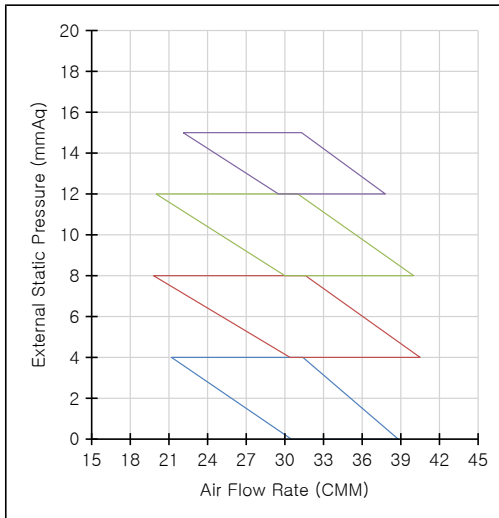

External Static Pressure (mmAq)	Option Code
0-4	01B06C-1C549F-276470-371020
4-8	01B06C-1C5928-276470-371020
8-12	01B06C-1C5AB1-276470-371020
12-15	01B06C-1C5AE8-276470-371020

12) AC100HBMDKH/EU (ODU : AC100HCADKH/EU)

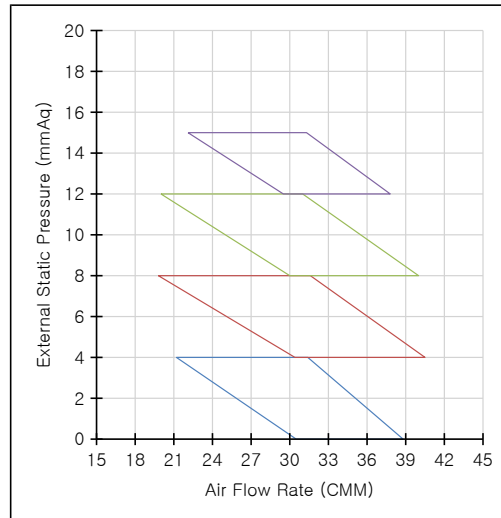

External Static Pressure (mmAq)	Option Code
0-4	01B06C-1C549F-276470-371020
4-8	01B06C-1C5928-276470-371020
8-12	01B06C-1C5AB1-276470-371020
12-15	01B06C-1C5AE8-276470-371020


Note

- Adjust option code according to the actual installation condition (external static pressure).
- The graphs display the available external static pressure range of installed indoor units. Therefore, they do not reflect the actual change of external static pressure and airflow rate according to adjusted airflow (High-Mid-Low) of installed indoor units.

8 Recommended operation range


Duct S

13) AC120HBMDKH/EU (ODU : AC120HCADNH/EU)

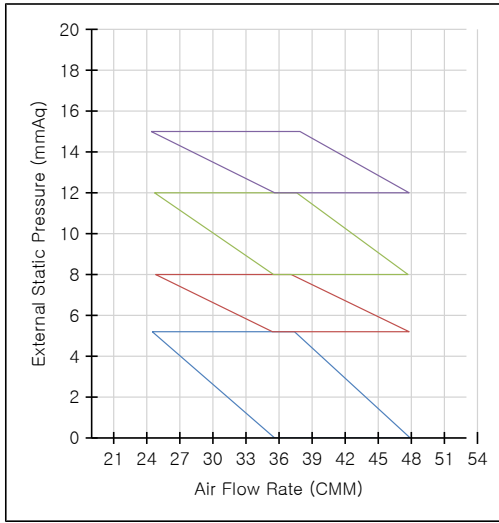


External Static Pressure (mmAq)	Option Code
0~5.2	01B06C-1C542C-277882-372045
5.2~8	01B06C-1C5572-277882-372045
8~12	01B06C-1C55EA-277882-372045
12~15	01B06C-1C592E-277882-372045

14) AC120HBMDKH/EU (ODU : AC120HCADKH/EU)

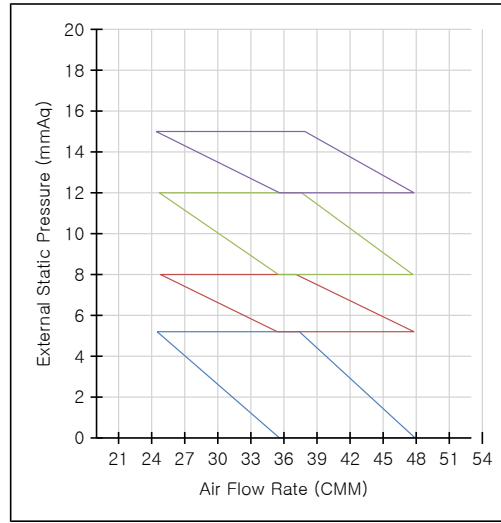


External Static Pressure (mmAq)	Option Code
0~5.2	01B06C-1C542C-277882-372045
5.2~8	01B06C-1C5572-277882-372045
8~12	01B06C-1C55EA-277882-372045
12~15	01B06C-1C592E-277882-372045

15) AC140HBMDKH/EU (ODU : AC140HCADNH/EU)

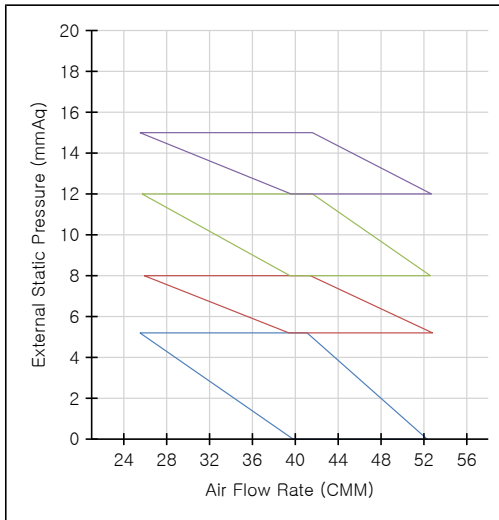

External Static Pressure (mmAq)	Option Code
0~5.2	01B06C-1C544F-278CA0-371045
5.2~8	01B06C-1C5592-278CA0-371045
8~12	01B06C-1C55FA-278CA0-371045
12~15	01B06C-1C593E-278CA0-371045

16) AC140HBMDKH/EU (ODU : AC140HCADKH/EU)

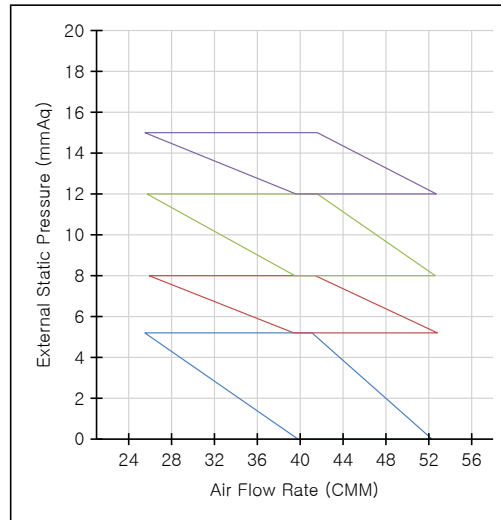

External Static Pressure (mmAq)	Option Code
0~5.2	01B06C-1C544F-278CA0-371045
5.2~8	01B06C-1C5592-278CA0-371045
8~12	01B06C-1C55FA-278CA0-371045
12~15	01B06C-1C593E-278CA0-371045


Note

- Adjust option code according to the actual installation condition (external static pressure).
- The graphs display the available external static pressure range of installed indoor units. Therefore, they do not reflect the actual change of external static pressure and airflow rate according to adjusted airflow (High-Mid-Low) of installed indoor units.

9 Electrical wiring diagram

Outdoor


AC026HCADKH/EU, AC035HCADKH/EU

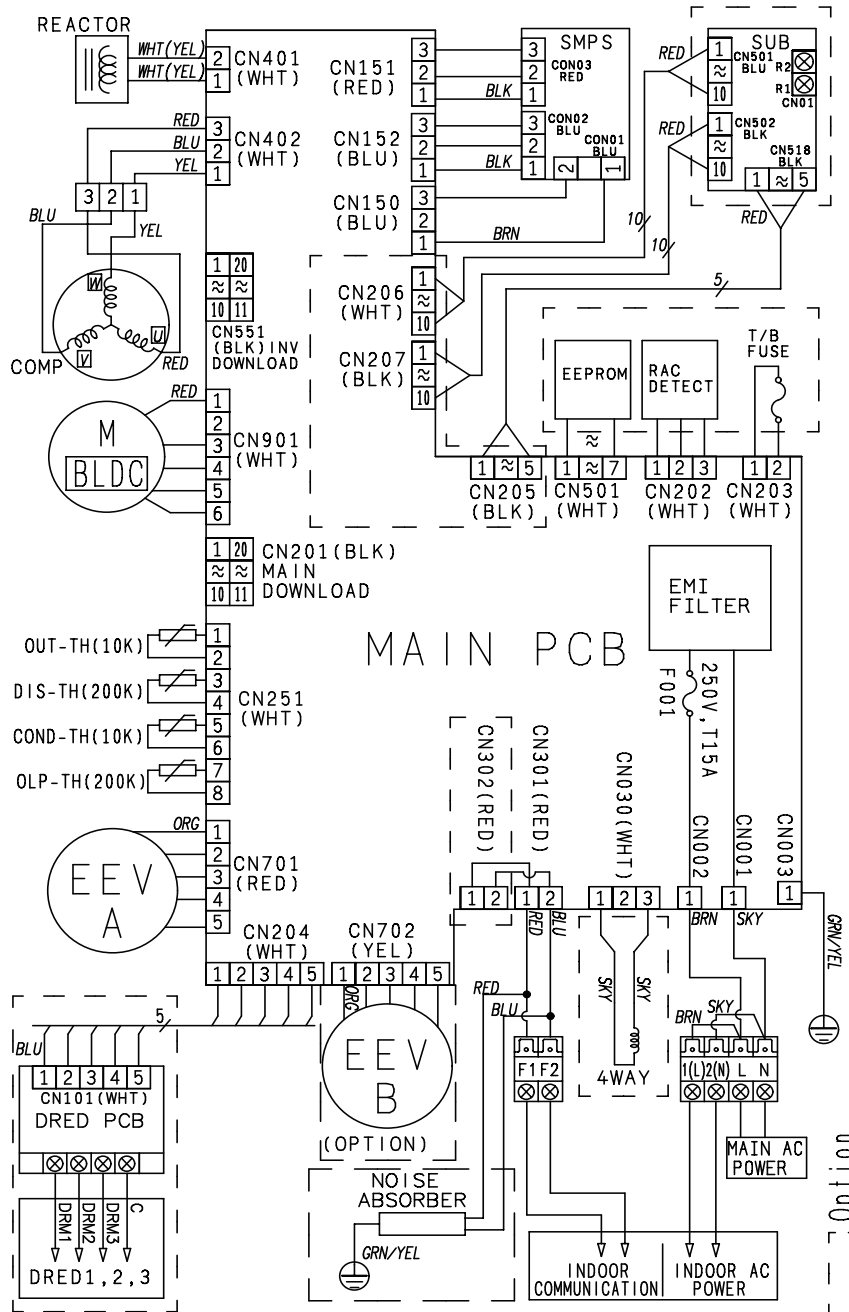

9 Electrical wiring diagram


Outdoor

AC052HCADKH/EU, AC060HCADKH/EU, AC071HCADKH/EU

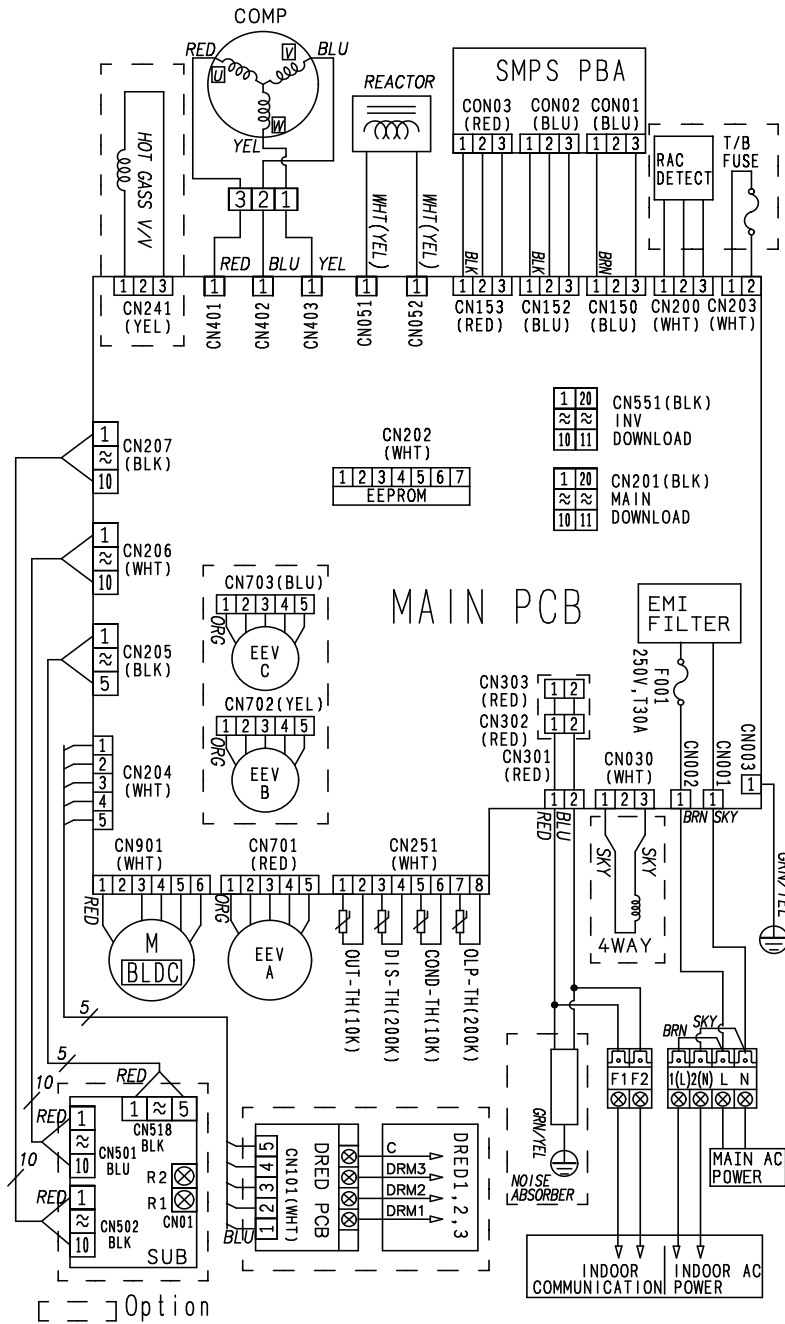

10 Sound pressure level

Outdoor

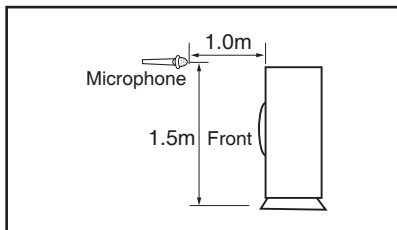

Unit: dB(A)


Model	Cooling	Heating
AC026HCADKH/EU (IDU : AC026HBLDKH/EU)	46.0	47.0
AC035HCADKH/EU (IDU : AC035HBLDKH/EU)	47.0	47.0
AC035HCADKH/EU (IDU : AC035HBMDKH/EU)	47.0	47.0
AC052HCADKH/EU (IDU : AC052HBLDKH/EU)	48.0	48.0

Note


- These operation values were obtained in an anechoic room. Sound pressure level will vary depending on a range of factors such as the construction of the particular room where the equipment is installed.
- Operation sound level may differ depending on operation and ambient conditions.

NC curve


1) AC026HCADKH/EU (IDU : AC026HBLDKH/EU)

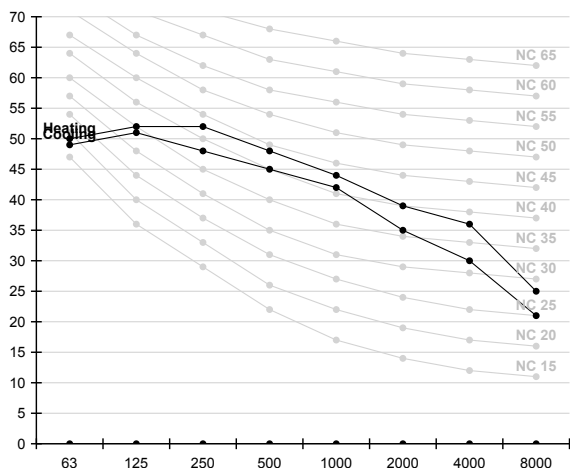


2) AC035HCADKH/EU (IDU : AC035HBLDKH/EU)

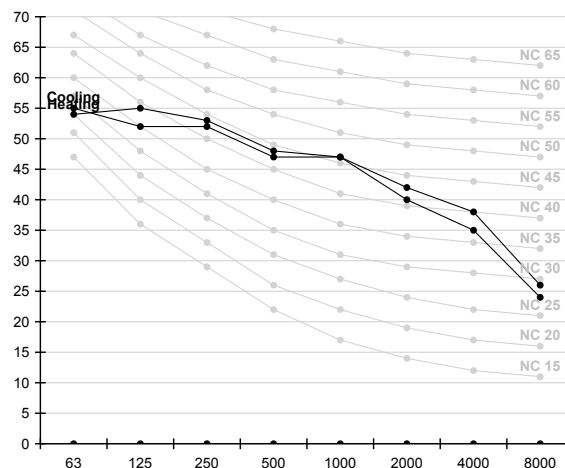

3) AC035HCADKH/EU (IDU : AC035HBMDKH/EU)

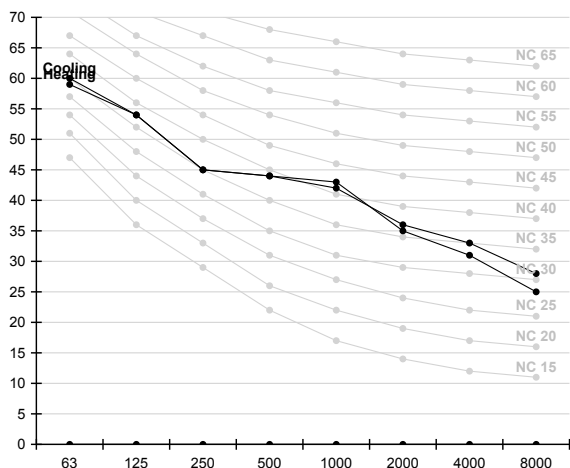


4) AC052HCADKH/EU (IDU : AC052HBLDKH/EU)

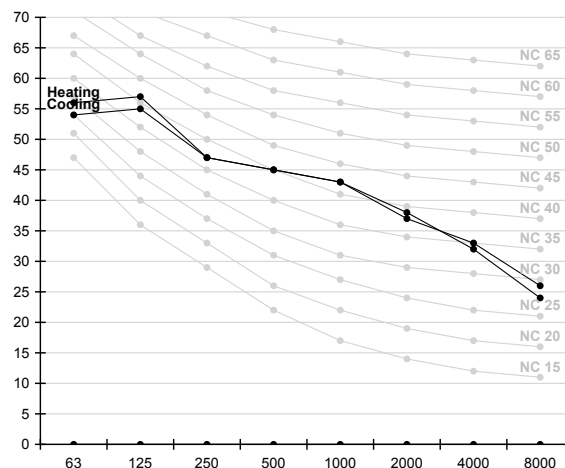

10 Sound pressure level

Outdoor

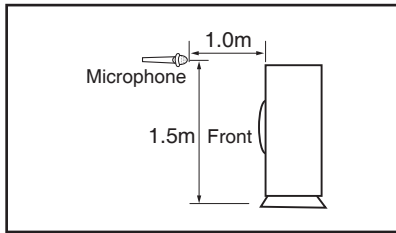

Unit: dB(A)


Model	Cooling	Heating
AC052HCADKH/EU (IDU : AC052HBMDKH/EU)	48.0	48.0
AC060HCADKH/EU (IDU : AC060HBMDKH/EU)	49.0	50.0
AC071HCADKH/EU (IDU : AC071HBLDKH/EU)	49.0	51.0
AC071HCADKH/EU (IDU : AC071HBMDKH/EU)	49.0	51.0

Note


- These operation values were obtained in an anechoic room. Sound pressure level will vary depending on a range of factors such as the construction of the particular room where the equipment is installed.
- Operation sound level may differ depending on operation and ambient conditions.

NC curve


1) AC052HCADKH/EU (IDU : AC052HBMDKH/EU)

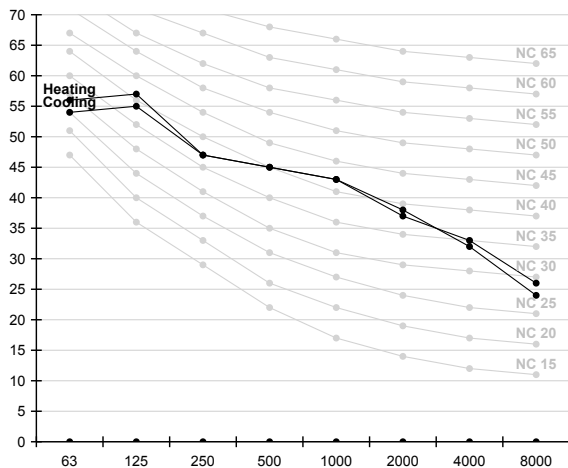


2) AC060HCADKH/EU (IDU : AC060HBMDKH/EU)

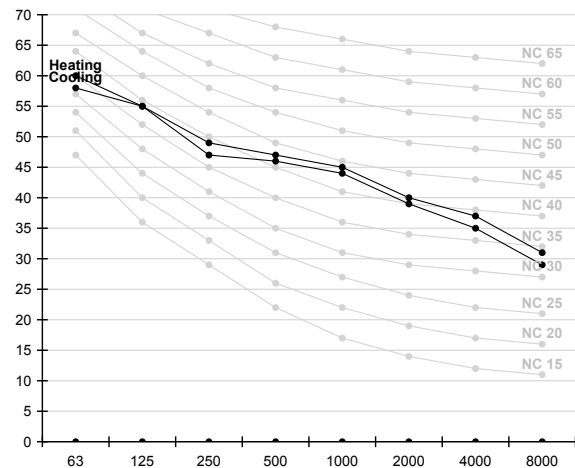

3) AC071HCADKH/EU (IDU : AC071HBLDKH/EU)

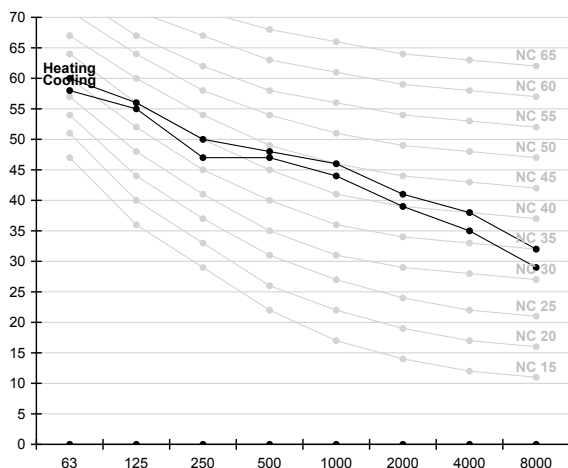


4) AC071HCADKH/EU (IDU : AC071HBMDKH/EU)

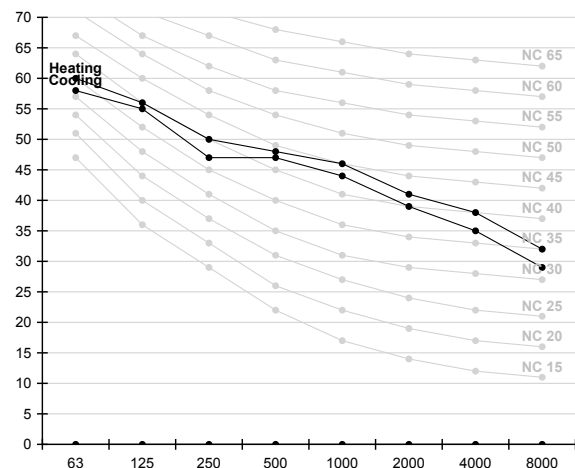

10 Sound pressure level

Outdoor

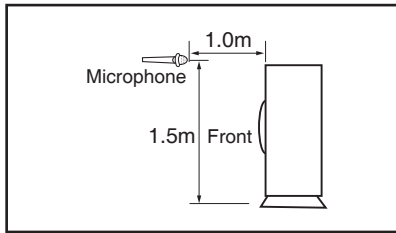

Unit: dB(A)


Model	Cooling	Heating
AC090HCADKH/EU (IDU : AC090HBMDKH/EU)	52.0	54.0
AC090HCADNH/EU (IDU : AC090HBMDKH/EU)	52.0	54.0
AC100HCADNH/EU (IDU : AC100HBMDKH/EU)	52.0	54.0
AC100HCADKH/EU (IDU : AC100HBMDKH/EU)	52.0	54.0

Note


- These operation values were obtained in an anechoic room. Sound pressure level will vary depending on a range of factors such as the construction of the particular room where the equipment is installed.
- Operation sound level may differ depending on operation and ambient conditions.

NC curve


1) AC090HCADKH/EU (IDU : AC090HBMDKH/EU)

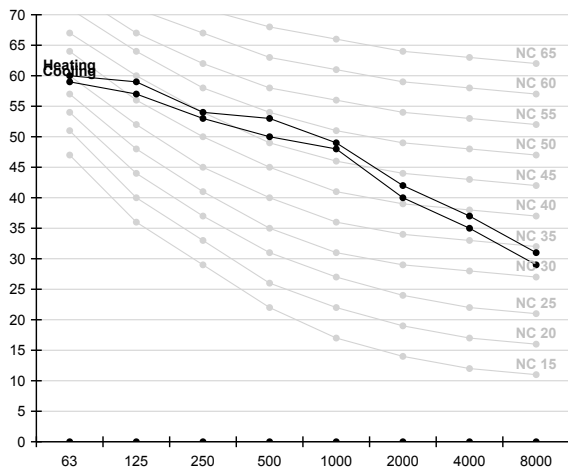


2) AC090HCADNH/EU (IDU : AC090HBMDKH/EU)

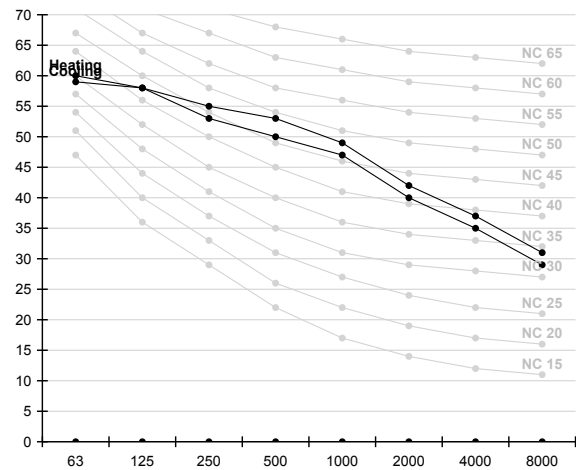

3) AC100HCADNH/EU (IDU : AC100HBMDKH/EU)

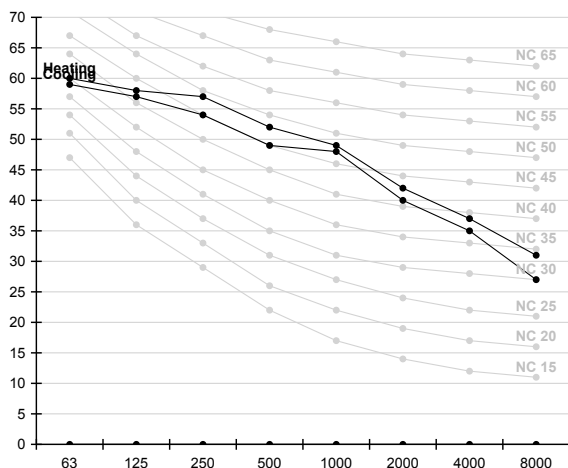


4) AC100HCADKH/EU (IDU : AC100HBMDKH/EU)

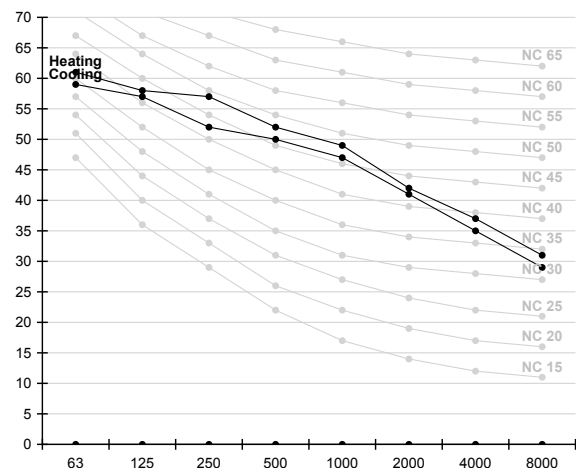

10 Sound pressure level

Outdoor

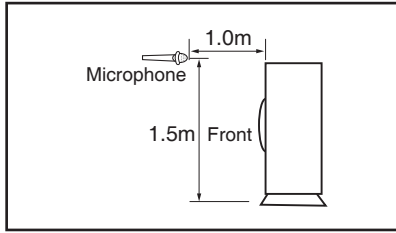

Unit: dB(A)


Model	Cooling	Heating
AC120HCADNH/EU (IDU : AC120HBMDKH/EU)	54.0	56.0
AC120HCADKH/EU (IDU : AC120HBMDKH/EU)	54.0	58.0
AC140HCADNH/EU (IDU : AC140HBMDKH/EU)	53.0	54.0
AC140HCADKH/EU (IDU : AC140HBMDKH/EU)	53.0	54.0

Note


- These operation values were obtained in an anechoic room. Sound pressure level will vary depending on a range of factors such as the construction of the particular room where the equipment is installed.
- Operation sound level may differ depending on operation and ambient conditions.

NC curve


1) AC120HCADNH/EU (IDU : AC120HBMDKH/EU)

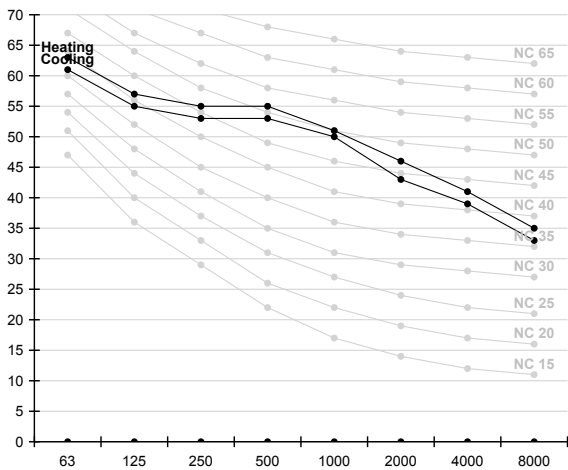


2) AC120HCADKH/EU (IDU : AC120HBMDKH/EU)

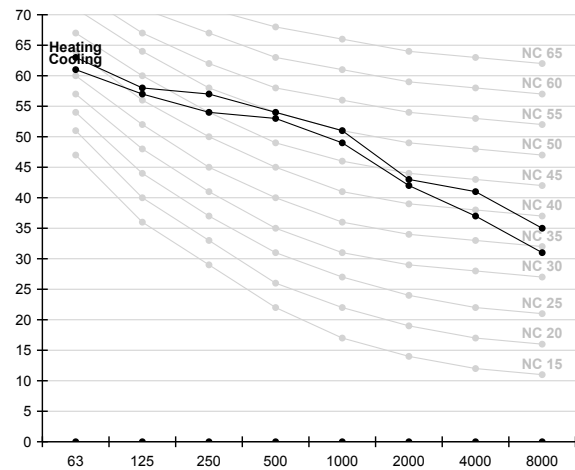

3) AC140HCADNH/EU (IDU : AC140HBMDKH/EU)

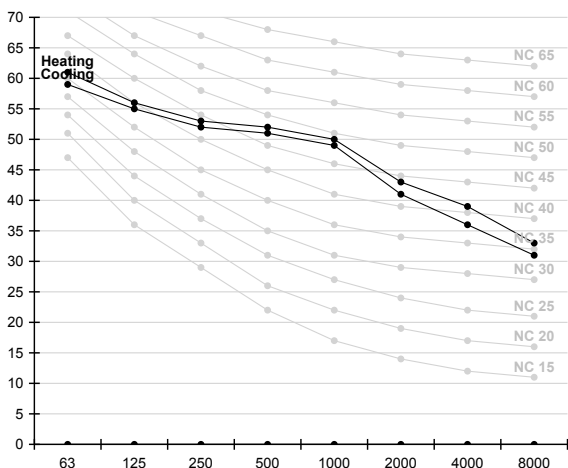

4) AC140HCADKH/EU (IDU : AC140HBMDKH/EU)

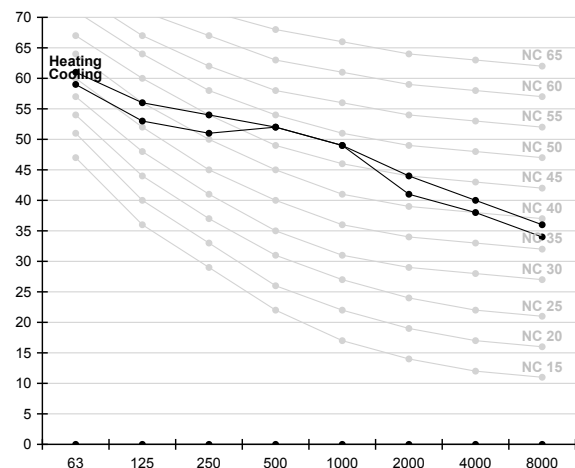

11 Sound power level

Outdoor


Note

- dBA = A-Weighted sound power level.
- Reference power : 1pW
- Measured according to ISO 3741.


Unit: dB(A)

Model	Power
AC026HCADKH/EU (IDU : AC026HBLDKH/EU)	63.0
AC035HCADKH/EU (IDU : AC035HBLDKH/EU)	63.0
AC035HCADKH/EU (IDU : AC035HBMDKH/EU)	63.0
AC052HCADKH/EU (IDU : AC052HBLDKH/EU)	63.0


1) AC026HCADKH/EU (IDU : AC026HBLDKH/EU)

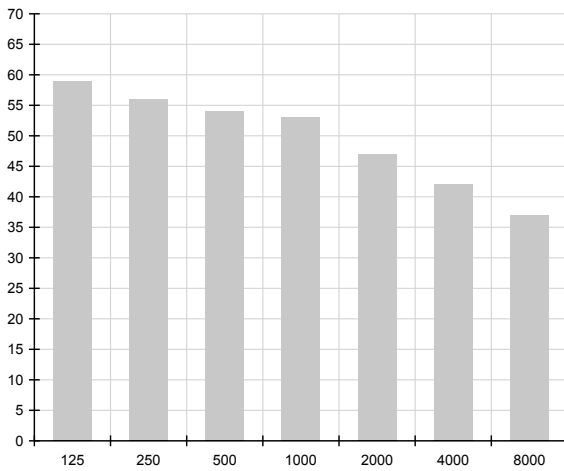


2) AC035HCADKH/EU (IDU : AC035HBLDKH/EU)

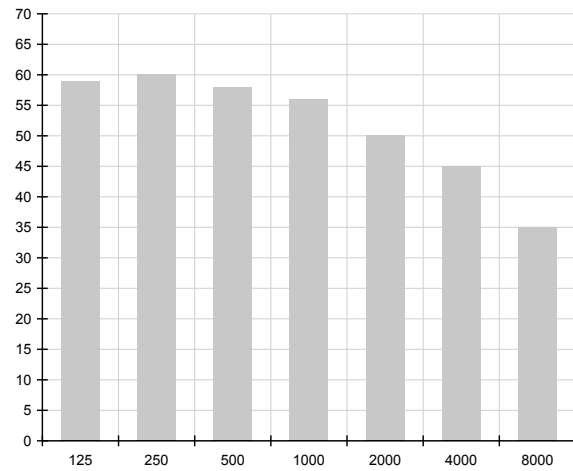

3) AC035HCADKH/EU (IDU : AC035HBMDKH/EU)

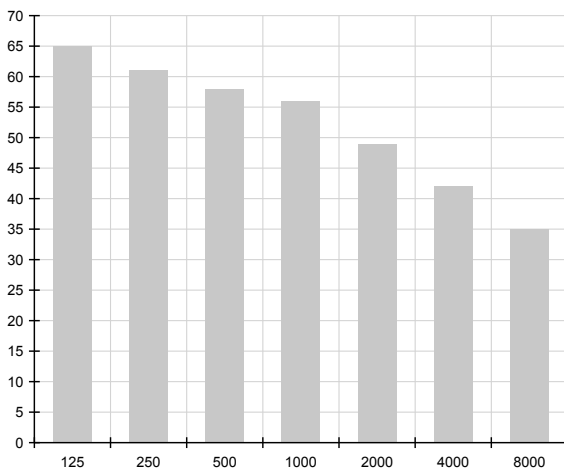

4) AC052HCADKH/EU (IDU : AC052HBLDKH/EU)

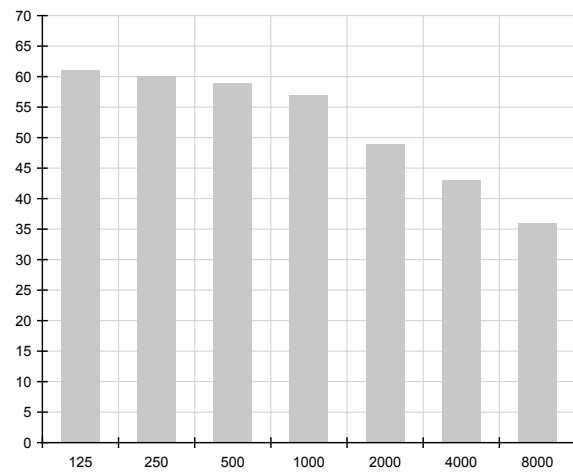

11 Sound power level

Outdoor


Note

- dBA = A-Weighted sound power level.
- Reference power : 1pW
- Measured according to ISO 3741.


Unit: dB(A)

Model	Power
AC052HCADKH/EU (IDU : AC052HBMDKH/EU)	63.0
AC060HCADKH/EU (IDU : AC060HBMDKH/EU)	64.0
AC071HCADKH/EU (IDU : AC071HBLDKH/EU)	65.0
AC071HCADKH/EU (IDU : AC071HBMDKH/EU)	65.0


1) AC052HCADKH/EU (IDU : AC052HBMDKH/EU)

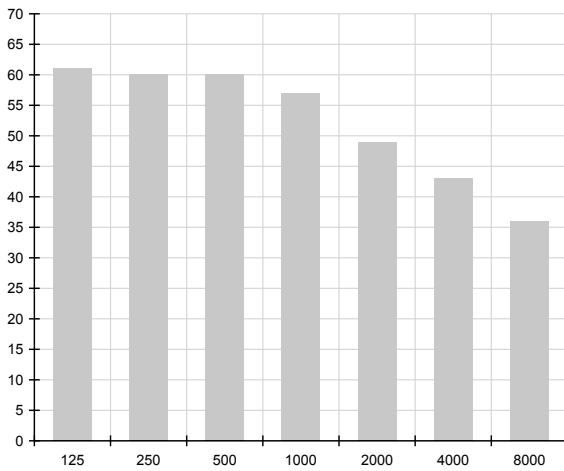


2) AC060HCADKH/EU (IDU : AC060HBMDKH/EU)

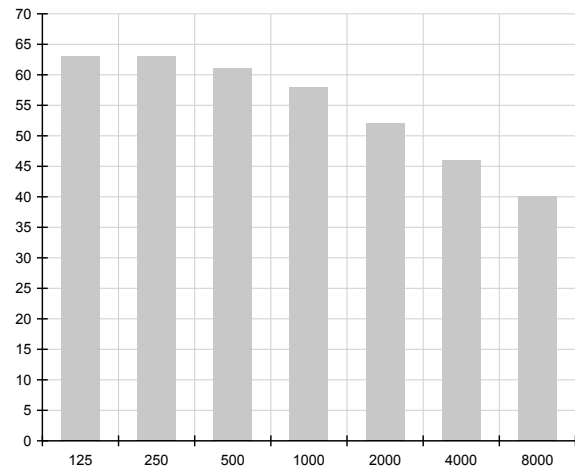

3) AC071HCADKH/EU (IDU : AC071HBLDKH/EU)

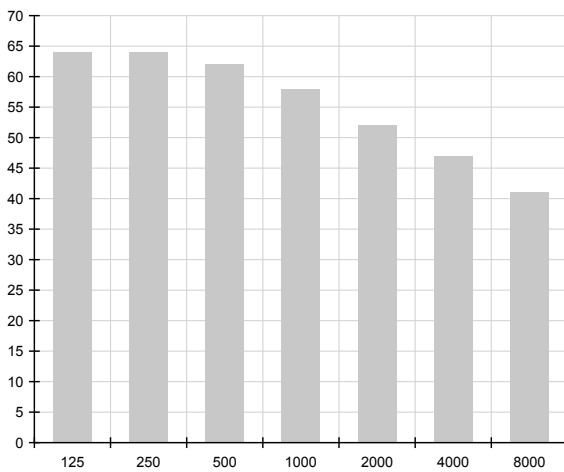

4) AC071HCADKH/EU (IDU : AC071HBMDKH/EU)

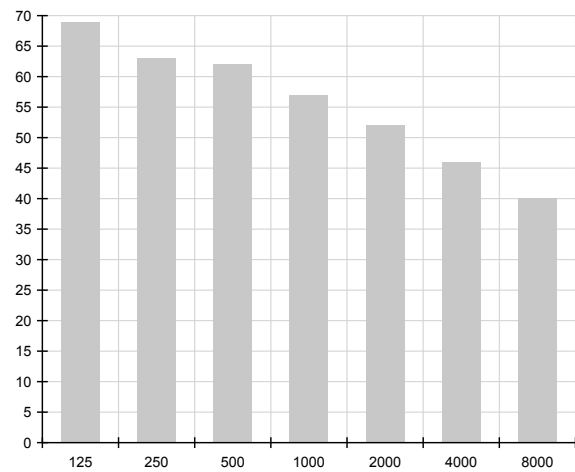

11 Sound power level

Outdoor


Note

- dBA = A-Weighted sound power level.
- Reference power : 1pW
- Measured according to ISO 3741.


Unit: dB(A)

Model	Power
AC090HCADKH/EU (IDU : AC090HBMDKH/EU)	68.0
AC090HCADNH/EU (IDU : AC090HBMDKH/EU)	68.0
AC100HCADNH/EU (IDU : AC100HBMDKH/EU)	69.0
AC100HCADKH/EU (IDU : AC100HBMDKH/EU)	69.0


1) AC090HCADKH/EU (IDU : AC090HBMDKH/EU)

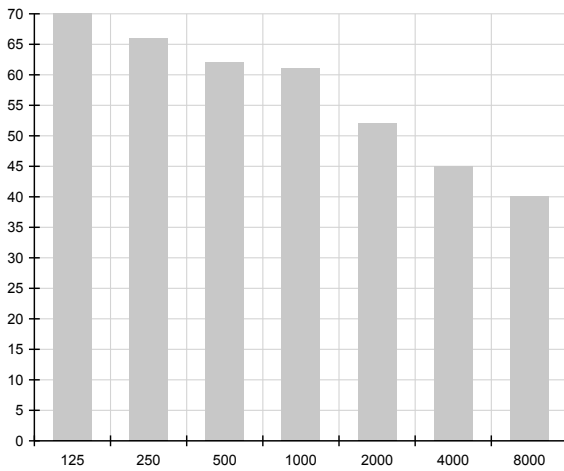


2) AC090HCADNH/EU (IDU : AC090HBMDKH/EU)

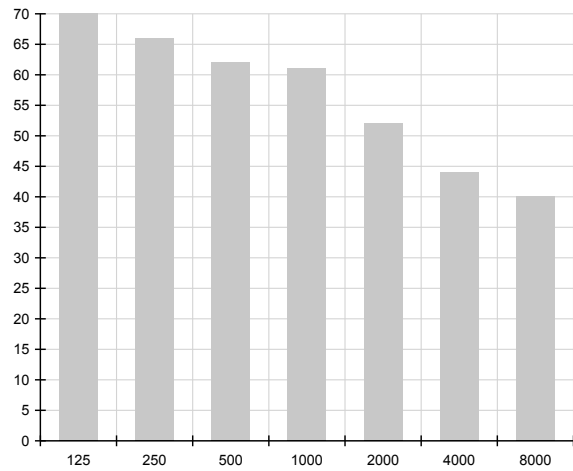

3) AC100HCADNH/EU (IDU : AC100HBMDKH/EU)

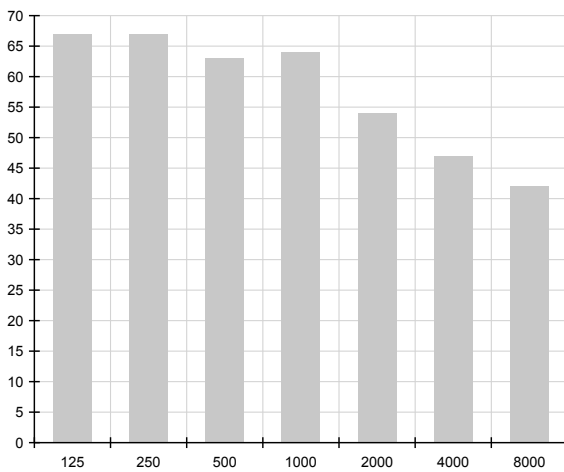

4) AC100HCADKH/EU (IDU : AC100HBMDKH/EU)

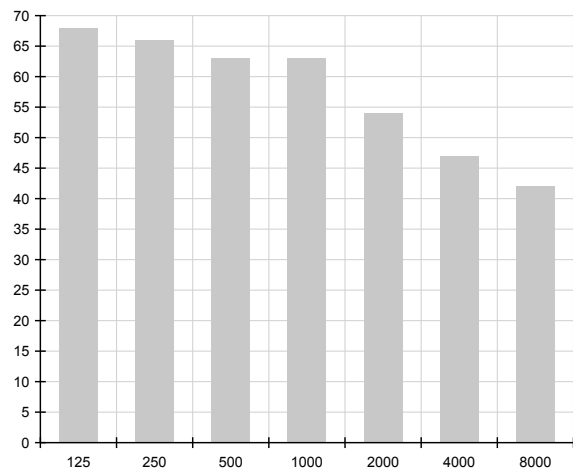

11 Sound power level

Outdoor


Note

- dBA = A-Weighted sound power level.
- Reference power : 1pW
- Measured according to ISO 3741.


Unit: dB(A)

Model	Power
AC120HCADNH/EU (IDU : AC120HBMDKH/EU)	70.0
AC120HCADKH/EU (IDU : AC120HBMDKH/EU)	70.0
AC140HCADNH/EU (IDU : AC140HBMDKH/EU)	70.0
AC140HCADKH/EU (IDU : AC140HBMDKH/EU)	70.0


1) AC120HCADNH/EU (IDU : AC120HBMDKH/EU)

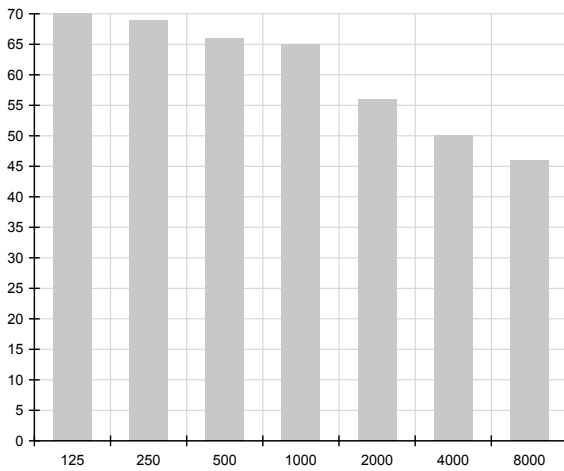


2) AC120HCADKH/EU (IDU : AC120HBMDKH/EU)

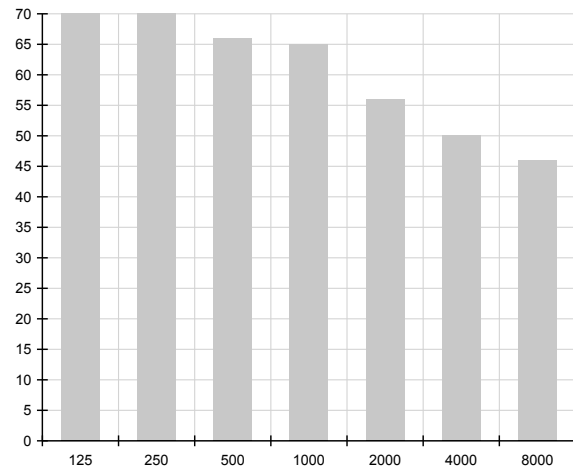

3) AC140HCADNH/EU (IDU : AC140HBMDKH/EU)

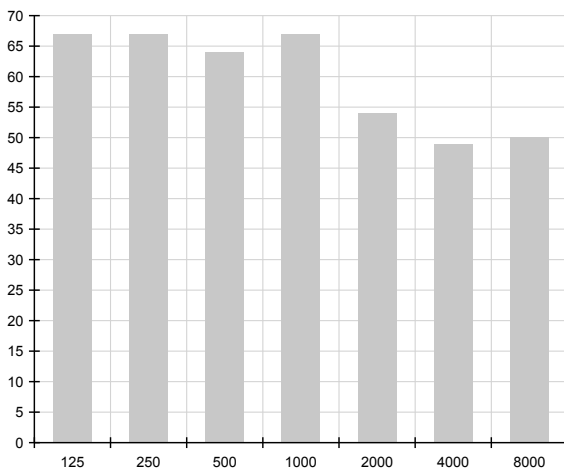


4) AC140HCADKH/EU (IDU : AC140HBMDKH/EU)

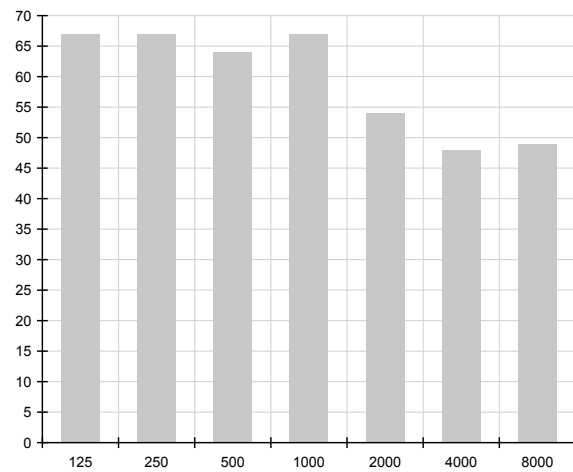

12 Cycle diagram

Outdoor

AC026HCADKH/EU, AC035HCADKH/EU

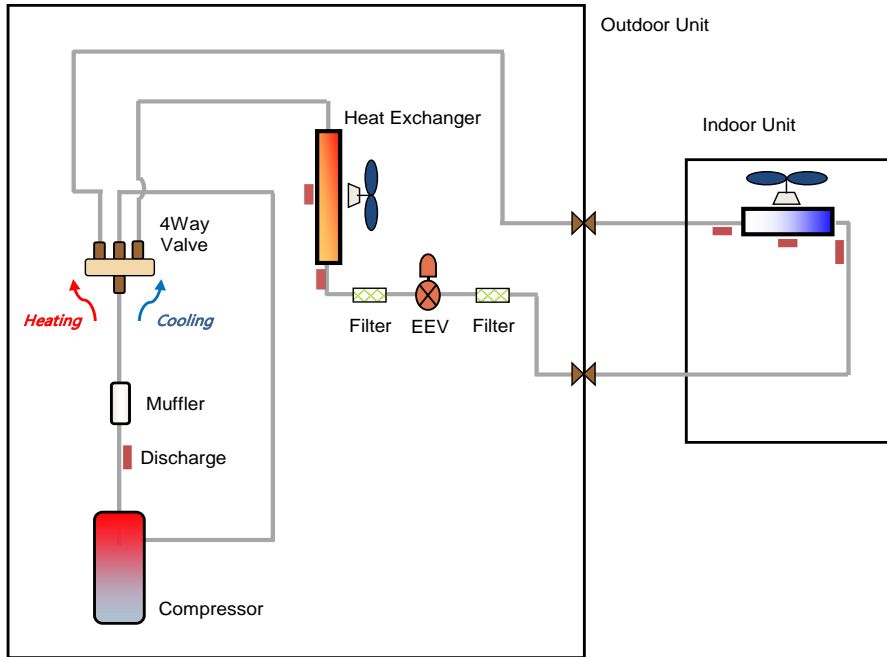










Category	Symbol	Description
Compressor		Rotary Inverter Compressor
Heat Exchanger		Condensing/Evaporating unit(FMC)
Filter		Filter
Valve	Expansion	Electronic Expansion Valve(EEV)
	Reversing	4 Way valve (Reversing valve)
	Service	Service valve
Senser	Temperature	Pip/Air Temperature sensor

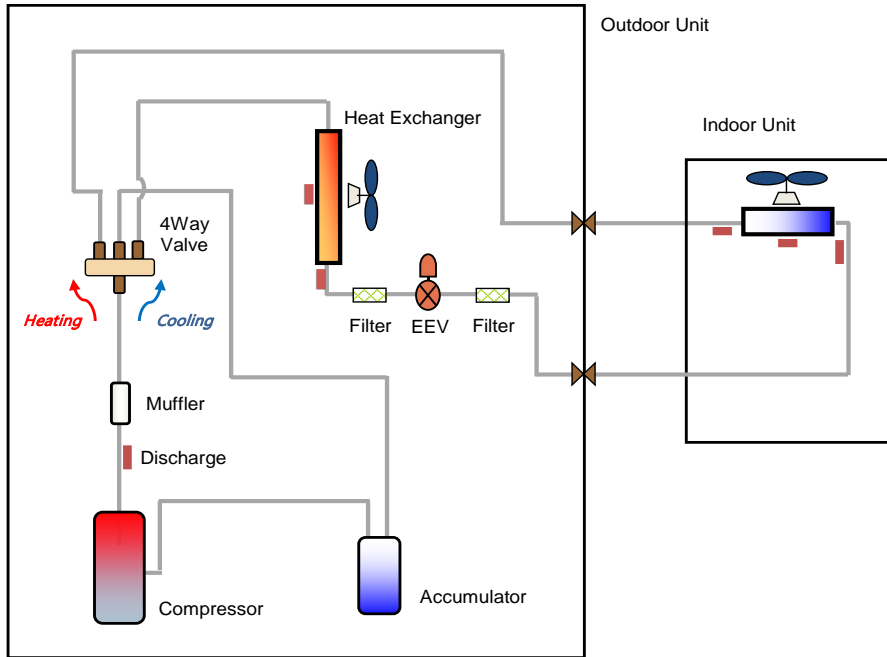12 Cycle diagram

Outdoor

AC052HCADKH/EU, AC060HCADKH/EU, AC071HCADKH/EU




Category	Symbol	Description	
Compressor		Rotary Inverter Compressor	
Heat Exchanger		Condensing/Evaporating unit(FMC)	
Accumulator		Accumulator	
Filter		Filter	
Valve	Expansion		Electronic Expansion Valve(EEV)
	Reversing		4 Way valve (Reversing valve)
	Service		Service valve
Sensor	Temperature		Pip/Air Temperature sensor

12 Cycle diagram

Outdoor

AC090HCADKH/EU, AC090HCADNH/EU, AC100HCADKH/EU, AC100HCADNH/EU, AC120HCADKH/EU, AC120HCADNH/EU, AC140HCADKH/EU
AC140HCADNH/EU

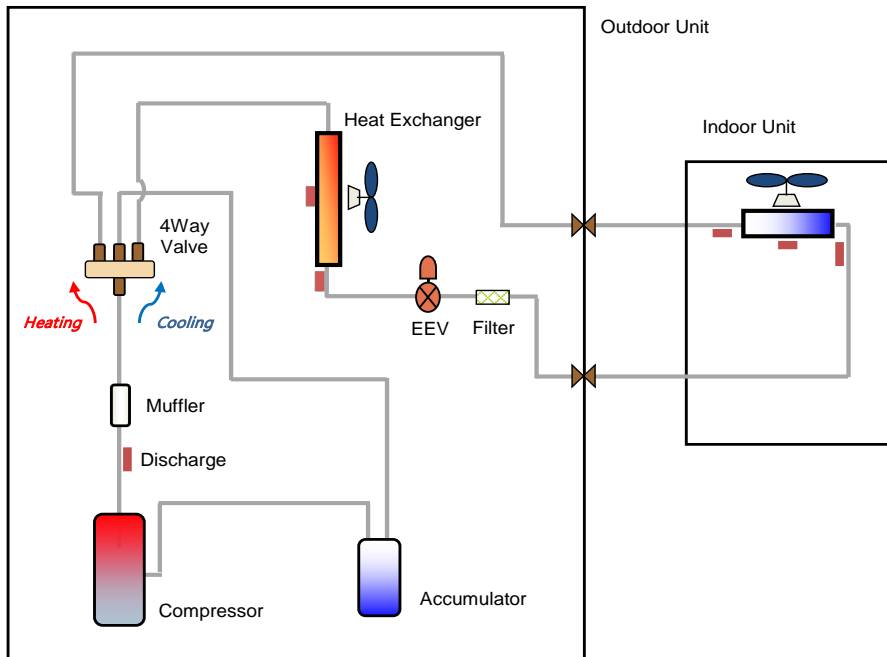

Category	Symbol	Description	
Compressor		Rotary Inverter Compressor	
Heat Exchanger		Condensing/Evaporating unit(FMC)	
Accumulator		Accumulator	
Filter		Filter	
Valve	Expansion		Electronic Expansion Valve(EEV)
	Reversing		4 Way valve (Reversing valve)
	Service		Service valve
Senser	Temperature		Pip/Air Temperature sensor

13 Dimensional drawing

Outdoor

AC026HCADKH/EU, AC035HCADKH/EU

Units : mm / inches

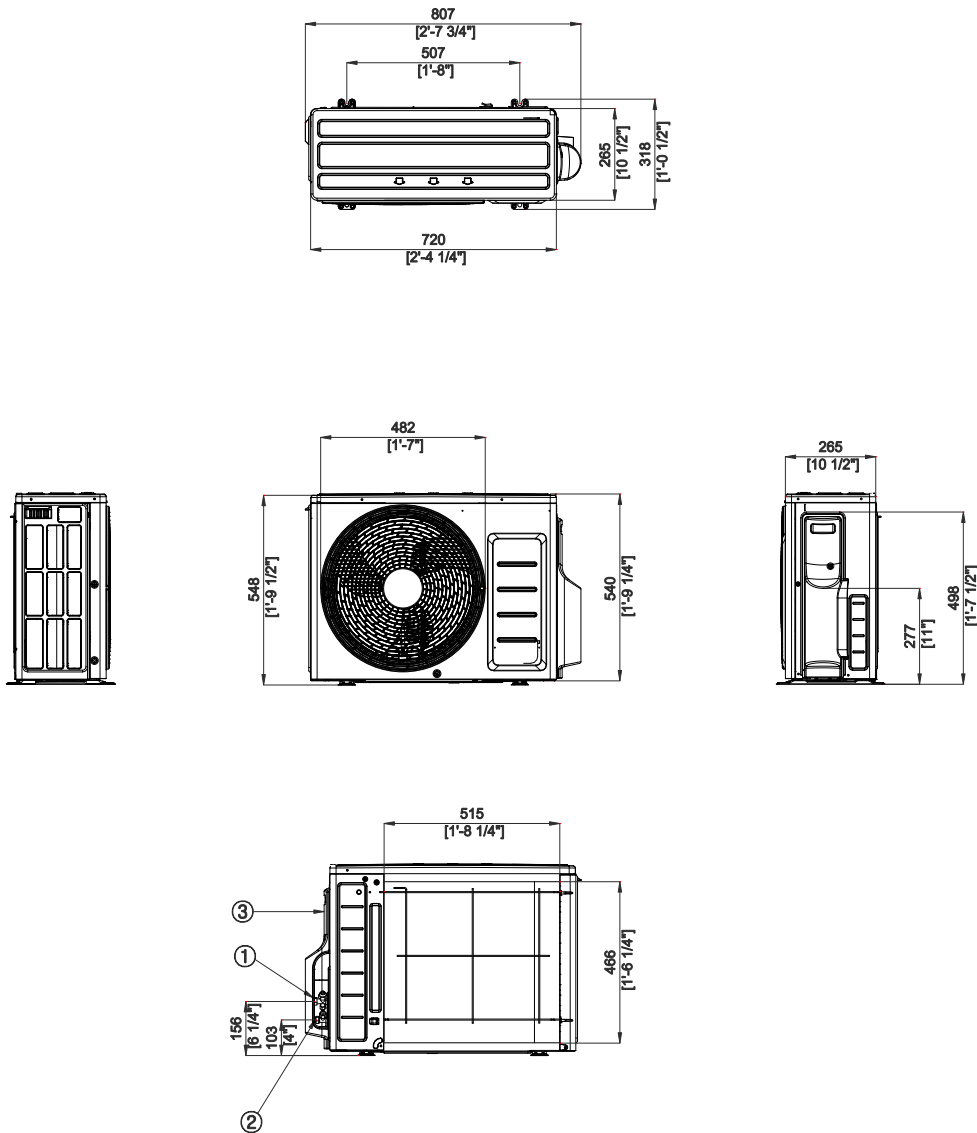


Table of descriptions

1	Refrigerant gas pipe	7	
2	Refrigerant liquid pipe	8	
3	Power & Comm. wiring conduits	9	
4		10	
5		11	
6		12	

13 Dimensional drawing

Outdoor

AC052HCADKH/EU

Units : mm / inches

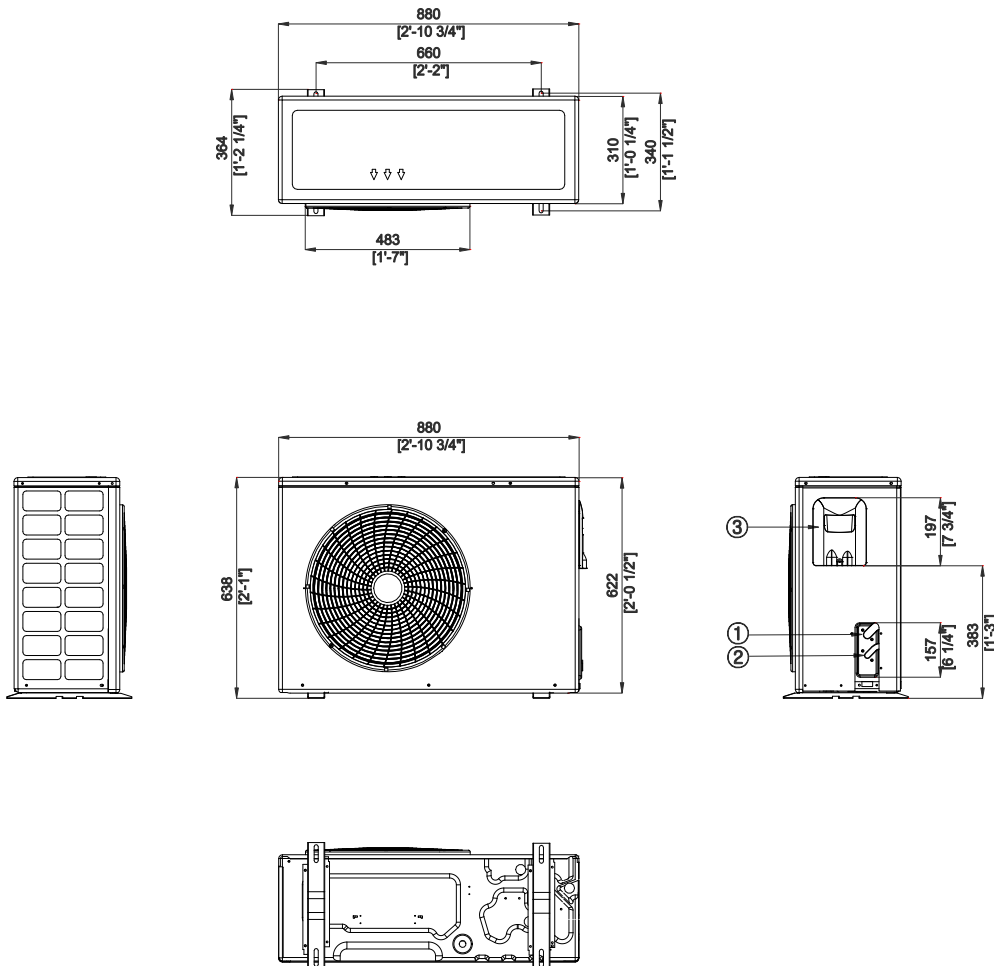


Table of descriptions

1	Refrigerant gas pipe	7	
2	Refrigerant liquid pipe	8	
3	Power & Comm. wiring conduits	9	
4		10	
5		11	
6		12	

13 Dimensional drawing

Outdoor

AC060HCADKH/EU, AC071HCADKH/EU

Units : mm / inches

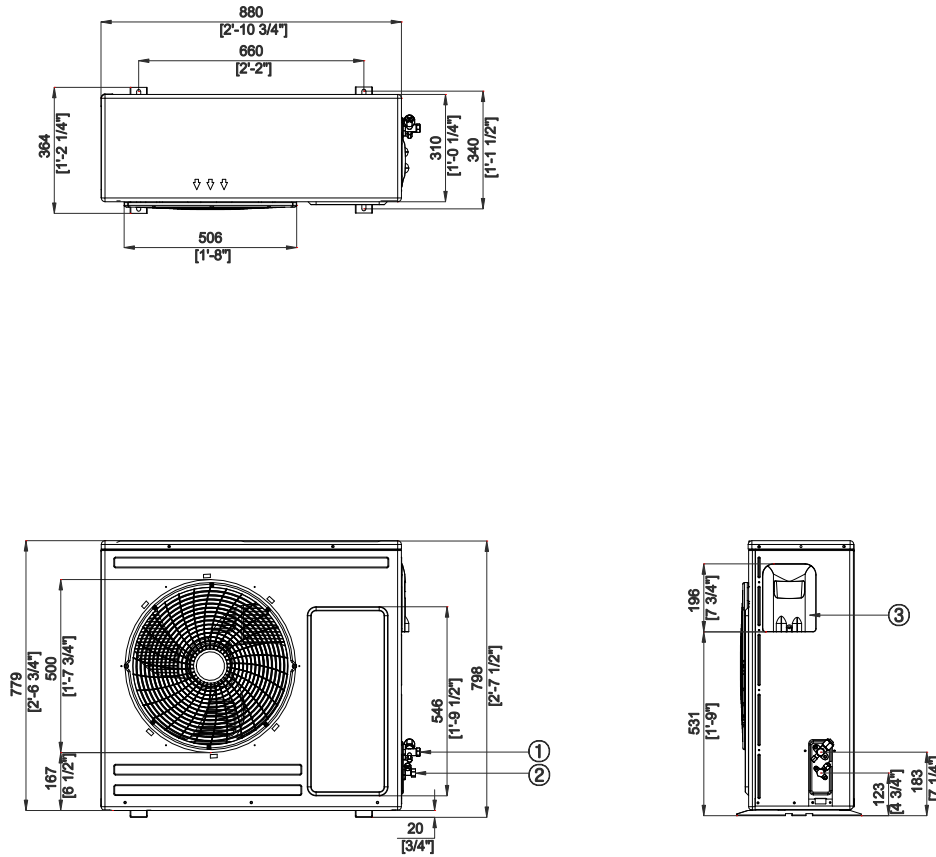


Table of descriptions

1	Refrigerant gas pipe	7	
2	Refrigerant liquid pipe	8	
3	Power & Comm. wiring conduits	9	
4		10	
5		11	
6		12	

13 Dimensional drawing

Outdoor

AC090HCADKH/EU, AC090HCADNH/EU, AC100HCADKH/EU, AC100HCADNH/EU, AC120HCADKH/EU, AC120HCADNH/EU

Units : mm / inches

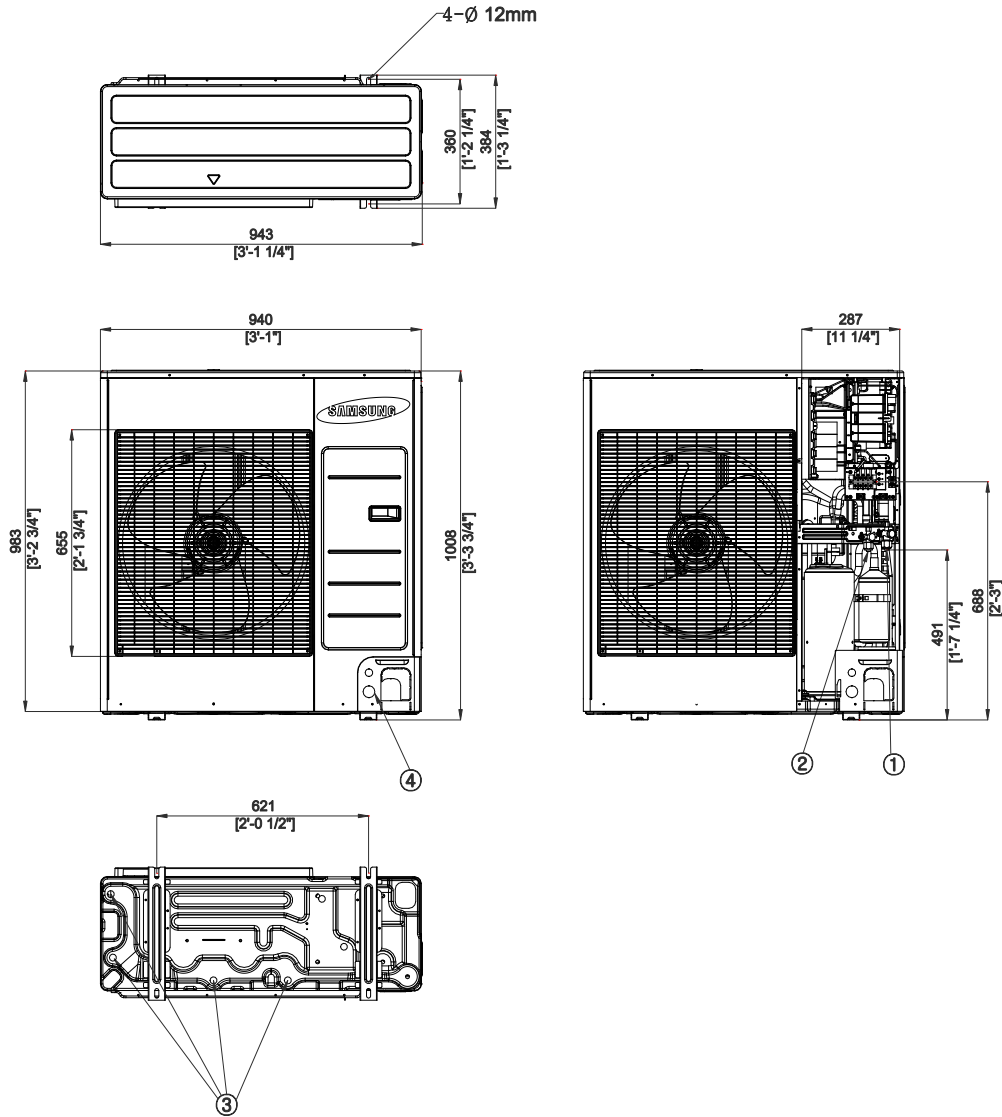


Table of descriptions

1	Refrigerant gas pipe	7	
2	Refrigerant liquid pipe	8	
3	Drain Hole	9	
4	Power & Comm. wiring conduits	10	
5		11	
6		12	

13 Dimensional drawing

Outdoor

AC140HCADKH/EU, AC140HCADNH/EU

Units : mm / inches

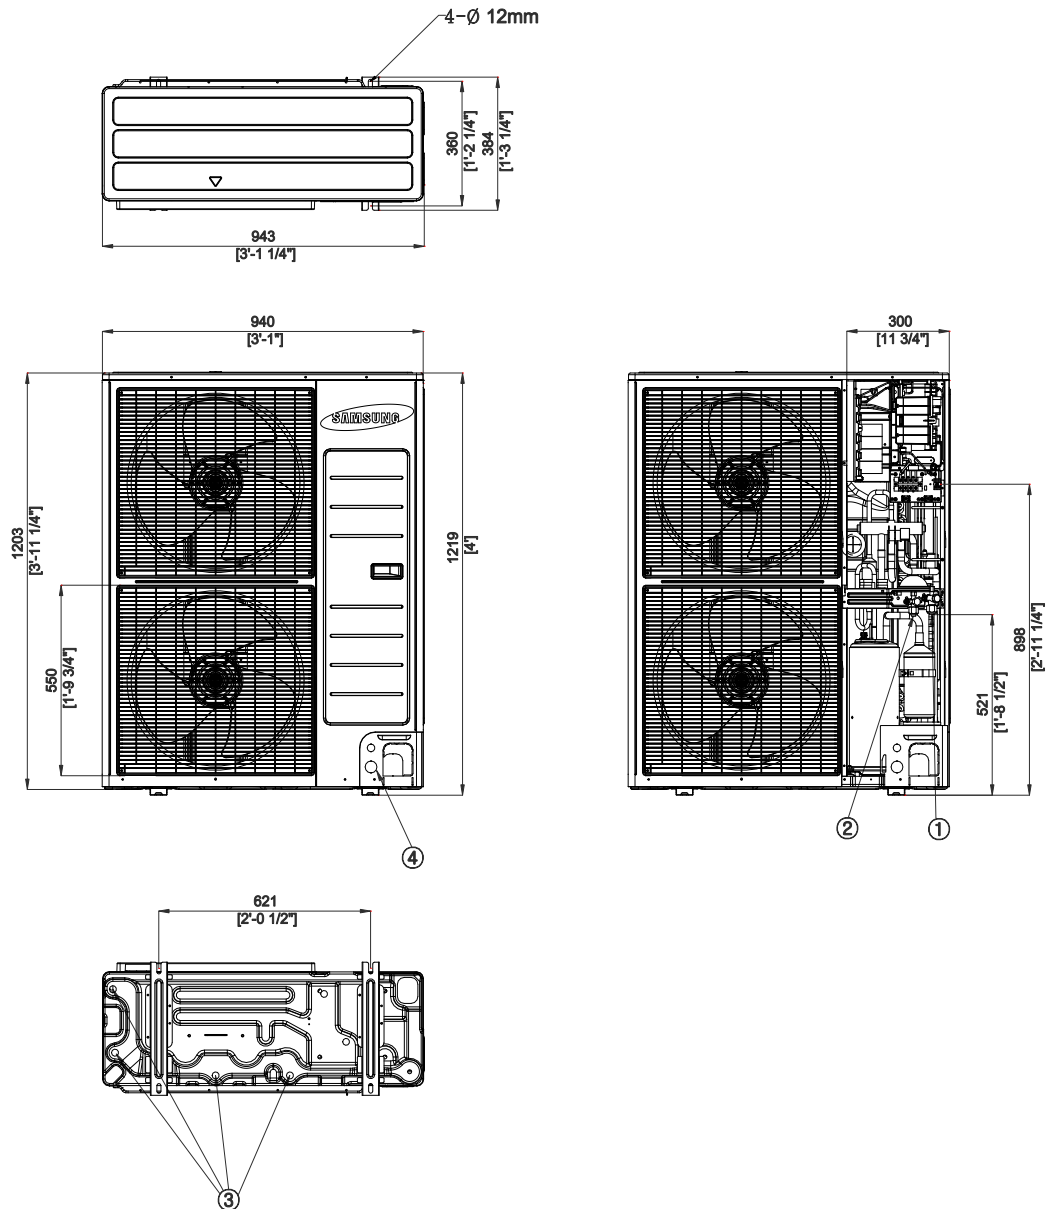


Table of descriptions


1	Refrigerant gas pipe	7	
2	Refrigerant liquid pipe	8	
3	Drain Hole	9	
4	Power & Comm. wiring conduits	10	
5		11	
6		12	

14 Capacity correction

Outdoor


AC052HBMDKH/EU + AC052HCADKH/EU

Cooling



		Pipe Length (m)														
		5	10	15	20	25	30	35	40	45	50	55	60	65	70	75
Level Difference (m)	20	-	-	-	-	0.92	0.90	-	-	-	-	-	-	-	-	-
	15	-	-	-	0.94	0.92	0.90	-	-	-	-	-	-	-	-	-
	10	-	-	0.96	0.94	0.92	0.90	-	-	-	-	-	-	-	-	-
	5	-	0.98	0.96	0.94	0.92	0.90	-	-	-	-	-	-	-	-	-
	0	1.00	0.98	0.96	0.94	0.92	0.90	-	-	-	-	-	-	-	-	-
	-5	-	0.96	0.95	0.93	0.91	0.90	-	-	-	-	-	-	-	-	-
	-10	-	-	0.94	0.93	0.91	0.89	-	-	-	-	-	-	-	-	-
	-15	-	-	-	0.91	0.90	0.89	-	-	-	-	-	-	-	-	-
	-20	-	-	-	-	0.89	0.88	-	-	-	-	-	-	-	-	-


Heating



		Pipe Length (m)														
		5	10	15	20	25	30	35	40	45	50	55	60	65	70	75
Level Difference (m)	20	-	-	-	-	0.92	0.90	-	-	-	-	-	-	-	-	-
	15	-	-	-	0.94	0.92	0.90	-	-	-	-	-	-	-	-	-
	10	-	-	0.96	0.94	0.92	0.90	-	-	-	-	-	-	-	-	-
	5	-	0.98	0.96	0.94	0.92	0.90	-	-	-	-	-	-	-	-	-
	0	1.00	0.98	0.96	0.94	0.92	0.90	-	-	-	-	-	-	-	-	-
	-5	-	0.96	0.95	0.93	0.91	0.90	-	-	-	-	-	-	-	-	-
	-10	-	-	0.94	0.93	0.91	0.90	-	-	-	-	-	-	-	-	-
	-15	-	-	-	0.91	0.90	0.89	-	-	-	-	-	-	-	-	-
	-20	-	-	-	-	0.92	0.90	-	-	-	-	-	-	-	-	-


AC060HBMDKH/EU + AC060HCADKH/EU

Cooling



		Pipe Length (m)														
		5	10	15	20	25	30	35	40	45	50	55	60	65	70	75
Level Difference (m)	30	-	-	-	-	-	0.96	0.95	0.94	0.93	0.92	-	-	-	-	-
	25	-	-	-	-	0.96	0.96	0.95	0.94	0.93	0.92	-	-	-	-	-
	20	-	-	-	0.97	0.96	0.96	0.95	0.94	0.93	0.92	-	-	-	-	-
	15	-	-	0.98	0.97	0.96	0.96	0.95	0.94	0.93	0.92	-	-	-	-	-
	10	-	0.99	0.98	0.97	0.96	0.96	0.95	0.94	0.93	0.92	-	-	-	-	-
	5	1.00	0.99	0.98	0.97	0.96	0.96	0.95	0.94	0.93	0.92	-	-	-	-	-
	0	1.00	0.99	0.98	0.97	0.96	0.96	0.95	0.94	0.93	0.92	-	-	-	-	-
	-5	1.00	0.99	0.98	0.97	0.96	0.95	0.94	0.93	0.93	0.92	-	-	-	-	-
	-10	-	0.98	0.98	0.97	0.96	0.95	0.94	0.93	0.92	0.91	-	-	-	-	-
	-15	-	-	0.97	0.96	0.96	0.95	0.94	0.93	0.92	0.91	-	-	-	-	-
	-20	-	-	-	0.96	0.95	0.94	0.93	0.93	0.92	0.91	-	-	-	-	-
	-25	-	-	-	-	0.95	0.94	0.93	0.92	0.91	0.90	-	-	-	-	-
	-30	-	-	-	-	-	0.94	0.93	0.92	0.91	0.90	-	-	-	-	-

Heating




		Pipe Length (m)														
		5	10	15	20	25	30	35	40	45	50	55	60	65	70	75
Level Difference (m)	30	-	-	-	-	-	0.96	0.95	0.94	0.93	0.92	-	-	-	-	-
	25	-	-	-	-	0.96	0.96	0.95	0.94	0.93	0.92	-	-	-	-	-
	20	-	-	-	0.97	0.96	0.96	0.95	0.94	0.93	0.92	-	-	-	-	-
	15	-	-	0.98	0.97	0.96	0.96	0.95	0.94	0.93	0.92	-	-	-	-	-
	10	-	0.99	0.98	0.97	0.96	0.96	0.95	0.94	0.93	0.92	-	-	-	-	-
	5	1.00	0.99	0.98	0.97	0.96	0.96	0.95	0.94	0.93	0.92	-	-	-	-	-
	0	1.00	0.99	0.98	0.97	0.96	0.96	0.95	0.94	0.93	0.92	-	-	-	-	-
	-5	1.00	0.99	0.98	0.97	0.96	0.96	0.95	0.94	0.93	0.92	-	-	-	-	-
	-10	-	0.99	0.98	0.97	0.96	0.96	0.95	0.94	0.93	0.92	-	-	-	-	-
	-15	-	-	0.98	0.97	0.96	0.96	0.95	0.94	0.93	0.92	-	-	-	-	-
	-20	-	-	-	0.97	0.96	0.96	0.95	0.94	0.93	0.92	-	-	-	-	-
	-25	-	-	-	-	0.96	0.96	0.95	0.94	0.93	0.92	-	-	-	-	-
	-30	-	-	-	-	-	0.96	0.95	0.94	0.93	0.92	-	-	-	-	-

14 Capacity correction

Outdoor


AC120HBMDKH/EU + AC120HCADNH/EU

Cooling



		Pipe Length (m)														
		5	10	15	20	25	30	35	40	45	50	55	60	65	70	75
Level Difference (m)	30	-	-	-	-	-	0.93	0.91	0.90	0.88	0.87	-	-	-	-	-
	25	-	-	-	-	0.94	0.93	0.91	0.90	0.88	0.87	-	-	-	-	-
	20	-	-	-	0.96	0.94	0.93	0.91	0.90	0.88	0.87	-	-	-	-	-
	15	-	-	0.97	0.96	0.94	0.93	0.91	0.90	0.88	0.87	-	-	-	-	-
	10	-	0.99	0.97	0.96	0.94	0.93	0.91	0.90	0.88	0.87	-	-	-	-	-
	5	1.00	0.99	0.97	0.96	0.94	0.93	0.91	0.90	0.88	0.87	-	-	-	-	-
	0	1.00	0.99	0.97	0.96	0.94	0.93	0.91	0.90	0.88	0.87	-	-	-	-	-
	-5	1.00	0.98	0.97	0.95	0.94	0.92	0.91	0.89	0.88	0.87	-	-	-	-	-
	-10	-	0.97	0.96	0.95	0.93	0.92	0.90	0.89	0.88	0.86	-	-	-	-	-
	-15	-	-	0.96	0.94	0.93	0.91	0.90	0.89	0.87	0.86	-	-	-	-	-
	-20	-	-	-	0.94	0.92	0.91	0.89	0.88	0.87	0.86	-	-	-	-	-
	-25	-	-	-	-	0.92	0.90	0.89	0.88	0.86	0.85	-	-	-	-	-
	-30	-	-	-	-	-	0.90	0.89	0.87	0.86	0.85	-	-	-	-	-


Heating



		Pipe Length (m)														
		5	10	15	20	25	30	35	40	45	50	55	60	65	70	75
Level Difference (m)	30	-	-	-	-	-	0.93	0.91	0.90	0.88	0.87	-	-	-	-	-
	25	-	-	-	-	0.94	0.93	0.91	0.90	0.88	0.87	-	-	-	-	-
	20	-	-	-	0.96	0.94	0.93	0.91	0.90	0.88	0.87	-	-	-	-	-
	15	-	-	0.97	0.96	0.94	0.93	0.91	0.90	0.88	0.87	-	-	-	-	-
	10	-	0.99	0.97	0.96	0.94	0.93	0.91	0.90	0.88	0.87	-	-	-	-	-
	5	1.00	0.99	0.97	0.96	0.94	0.93	0.91	0.90	0.88	0.87	-	-	-	-	-
	0	1.00	0.99	0.97	0.96	0.94	0.93	0.91	0.90	0.88	0.87	-	-	-	-	-
	-5	1.00	0.99	0.97	0.96	0.94	0.93	0.91	0.90	0.88	0.87	-	-	-	-	-
	-10	-	0.99	0.97	0.96	0.94	0.93	0.91	0.90	0.88	0.87	-	-	-	-	-
	-15	-	-	0.97	0.96	0.94	0.93	0.91	0.90	0.88	0.87	-	-	-	-	-
	-20	-	-	-	0.96	0.94	0.93	0.91	0.90	0.88	0.87	-	-	-	-	-
	-25	-	-	-	-	0.94	0.93	0.91	0.90	0.88	0.87	-	-	-	-	-
	-30	-	-	-	-	-	0.93	0.91	0.90	0.88	0.87	-	-	-	-	-


AC120HBMDKH/EU + AC120HCADKH/EU

Cooling



		Pipe Length (m)														
		5	10	15	20	25	30	35	40	45	50	55	60	65	70	75
Level Difference (m)	30	-	-	-	-	-	0.93	0.91	0.90	0.88	0.87	-	-	-	-	-
	25	-	-	-	-	0.94	0.93	0.91	0.90	0.88	0.87	-	-	-	-	-
	20	-	-	-	0.96	0.94	0.93	0.91	0.90	0.88	0.87	-	-	-	-	-
	15	-	-	0.97	0.96	0.94	0.93	0.91	0.90	0.88	0.87	-	-	-	-	-
	10	-	0.99	0.97	0.96	0.94	0.93	0.91	0.90	0.88	0.87	-	-	-	-	-
	5	1.00	0.99	0.97	0.96	0.94	0.93	0.91	0.90	0.88	0.87	-	-	-	-	-
	0	1.00	0.99	0.97	0.96	0.94	0.93	0.91	0.90	0.88	0.87	-	-	-	-	-
	-5	1.00	0.98	0.97	0.95	0.94	0.92	0.91	0.89	0.88	0.87	-	-	-	-	-
	-10	-	0.97	0.96	0.95	0.93	0.92	0.90	0.89	0.88	0.86	-	-	-	-	-
	-15	-	-	0.96	0.94	0.93	0.91	0.90	0.89	0.87	0.86	-	-	-	-	-
	-20	-	-	-	0.94	0.92	0.91	0.89	0.88	0.87	0.86	-	-	-	-	-
	-25	-	-	-	-	0.92	0.90	0.89	0.88	0.86	0.85	-	-	-	-	-
	-30	-	-	-	-	-	0.90	0.89	0.87	0.86	0.85	-	-	-	-	-

Heating



		Pipe Length (m)														
		5	10	15	20	25	30	35	40	45	50	55	60	65	70	75
Level Difference (m)	30	-	-	-	-	-	0.93	0.91	0.90	0.88	0.87	-	-	-	-	-
	25	-	-	-	-	0.94	0.93	0.91	0.90	0.88	0.87	-	-	-	-	-
	20	-	-	-	0.96	0.94	0.93	0.91	0.90	0.88	0.87	-	-	-	-	-
	15	-	-	0.97	0.96	0.94	0.93	0.91	0.90	0.88	0.87	-	-	-	-	-
	10	-	0.99	0.97	0.96	0.94	0.93	0.91	0.90	0.88	0.87	-	-	-	-	-
	5	1.00	0.99	0.97	0.96	0.94	0.93	0.91	0.90	0.88	0.87	-	-	-	-	-
	0	1.00	0.99	0.97	0.96	0.94	0.93	0.91	0.90	0.88	0.87	-	-	-	-	-
	-5	1.00	0.99	0.97	0.96	0.94	0.93	0.91	0.90	0.88	0.87	-	-	-	-	-
	-10	-	0.99	0.97	0.96	0.94	0.93	0.91	0.90	0.88	0.87	-	-	-	-	-
	-15	-	-	0.97	0.96	0.94	0.93	0.91	0.90	0.88	0.87	-	-	-	-	-
	-20	-	-	-	0.96	0.94	0.93	0.91	0.90	0.88	0.87	-	-	-	-	-
	-25	-	-	-	-	0.94	0.93	0.91	0.90	0.88	0.87	-	-	-	-	-
	-30	-	-	-	-	-	0.93	0.91	0.90	0.88	0.87	-	-	-	-	-

SAMSUNG

2016.03
Ver.1.3

Samsung Electronics Co., LTD.
B2B PM / SE

Head Office (Suwon Korea) 129, Samsung-Ro, Yeongtong-Gu, Suwon City, Gyeonggi-Do, Korea 443-742
Website : www.samsung.com Email : airconditioner@samsung.com
Images and data in this book may subject to change without prior notice.

SAMSUNG